



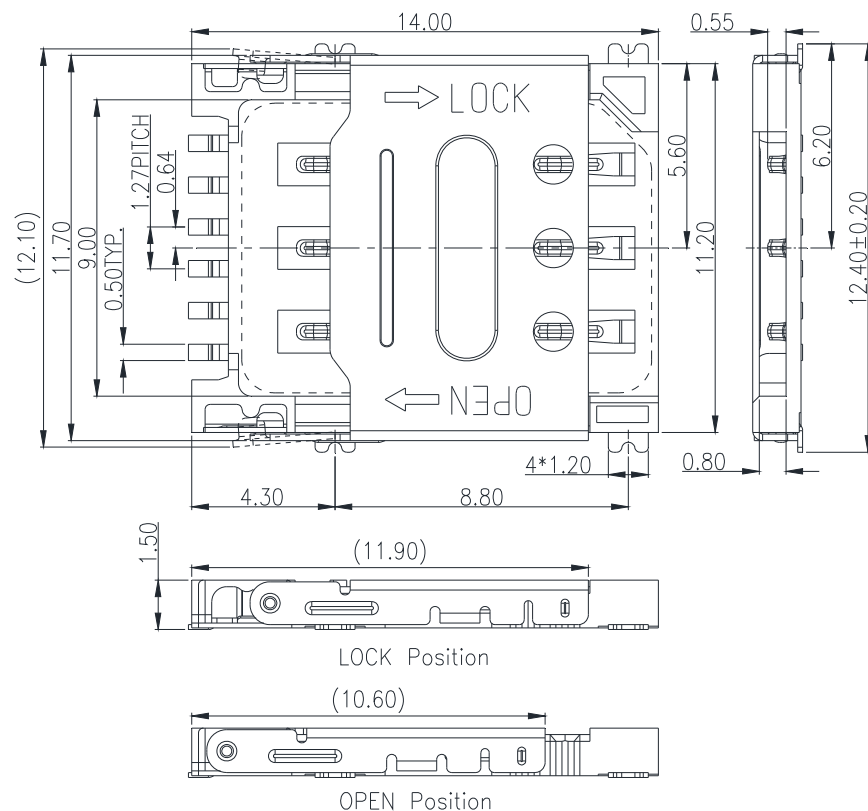

Unit: mm; Tolerances: ± 0.15 mm
Figure 5.1 Mechanical outline dimension

Note:

1. Coplanarity of solder pins 0.10mm max.
2. Recommended thickness of solder paste > 0.15mm.

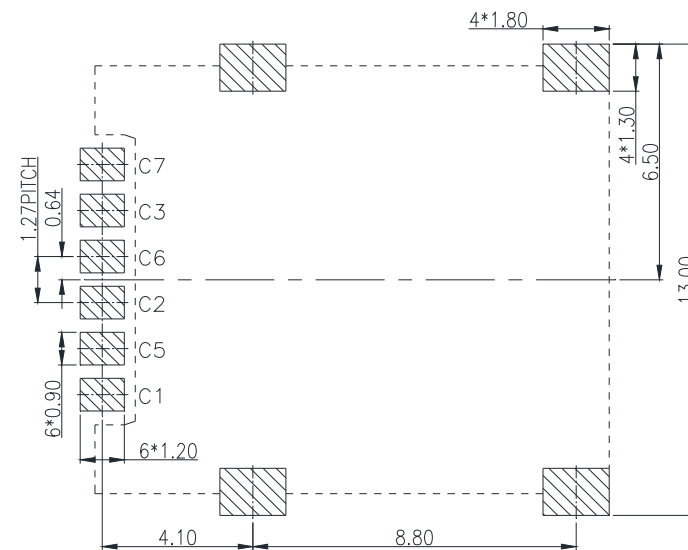

Unit: mm; Tolerances: ± 0.05 mm
Figure 5.2 Reference dimension for PCB layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

NASCV-W11E15XR-06-LF

SERIES

90°SMT

PAD TO PAD 11.7mm

EAR

LEADFREE


06WAY

REEL


NON POST

BODY HIGH 1.5mm

DESCRIPTION:

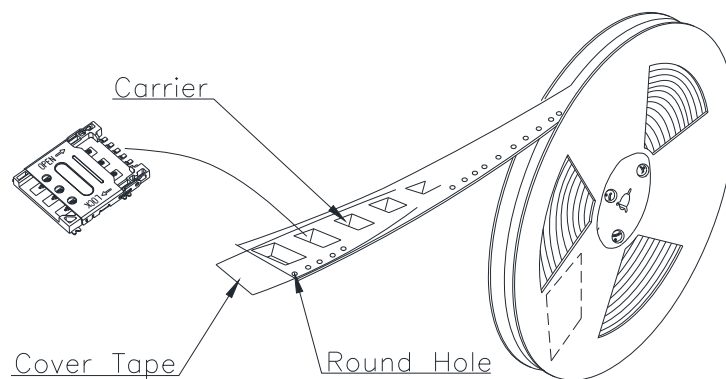

N.W.: 0.45 KGS
 G.W.: 0.69 KGS
 Q'TY: 1,500 PCs per reel
 Meas.: dia. 33 CM, W2.4 CM

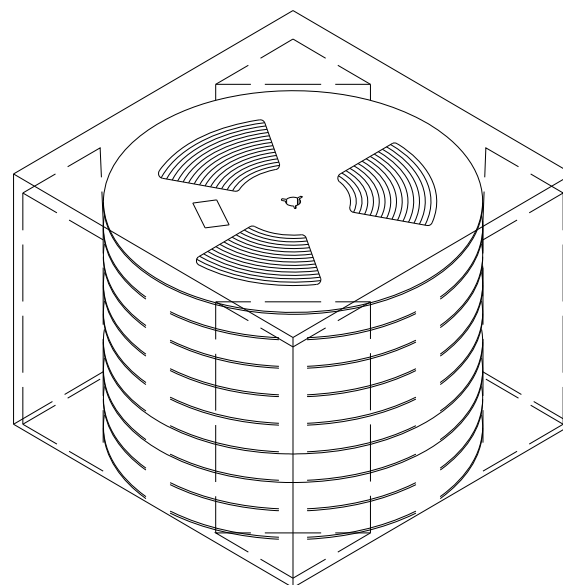

N.W.: 4.5 KGS
 G.W.: 8.7 KGS
 Q'TY: 15,000 PCs per carton
 (10 reels set in order)
 Meas.: 35.5L x 35.5W x 33.0H CM

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

NASCV-W11E15XR-06-LF

SERIES

LEADFREE

06WAY

REEL

NON POST

BODY HIGH 1.5mm

90°SMT

PAD TO PAD 11.7mm

EAR

DESCRIPTION: