


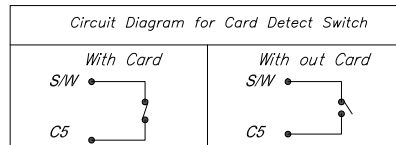



P.C.B LAYOUT MOUNTING PATTERN

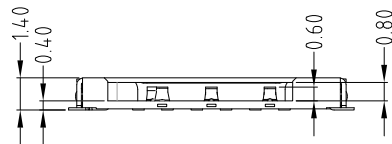

STEP 1 INSERT NANO SIM CARD



STEP 2 PUSH THE SHELL



STEP 3 FINISH

SPECIFICATION:


- CURRENT RATING : 0.5 mA AC / DC MAX.
- VOLTAGE RATING : 5V AC / DC
- INSULATION RESISTANCE : 100MΩ MIN.
- CONTACT RESISTANCE : 80mΩ MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.
- STORAGE TEMPERATURE : -40°C TO +85°C.
- LIFE : 5000 CYCLES

MATERIALS:

- HOUSING : LCP
- CONTACT : PHOSPHOR BRONZE
- SHELL : SUS

Finish:

- Finish: CONTACT: PLATED GOLD IN MATING AREA ;  
GOLD PLATED ON SOLDER BALLS ;  
NICKEL UNDER PLATED OVERALL
- SHELL: NICKEL UNDER PLATED SURFACE LAYER

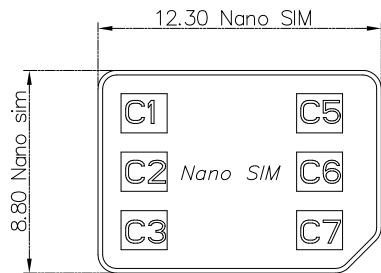

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	SWTSH PIN

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

照片框

ORDER INFORMATION

NASCV-W12E14X-06-LF

SERIES

90°SMT

EAR

LEADFREE

06WAY

NON POST

BODY HIGH 1.4mm

PAD TO PAD 12.1mm

DESCRIPTION: Nano SIM CARD 掀蓋 1.40H 7P 帶開關