



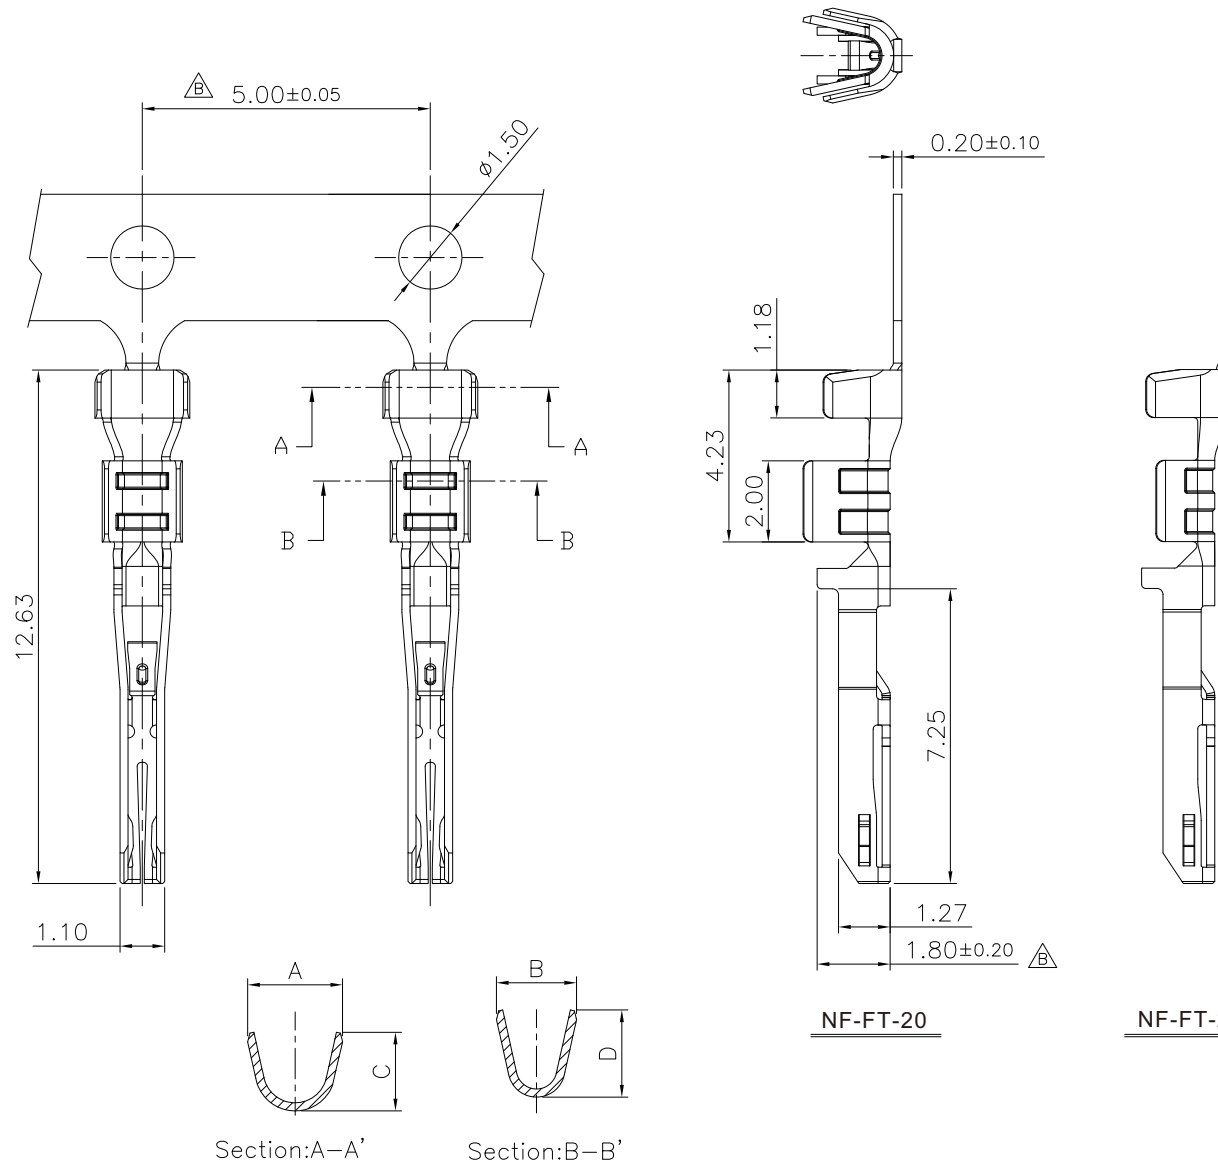

Specifications:
 Current Rating:6.5A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:10m ohm.Max
 Insulation Resistance:1000M ohm.Min
 Withstanding Voltage:1500V AC/Minute
 Operating Temperature Range:-40°C~+105°C

Material and Finish
 Terminal:Brass
 Plating:Tin or Gold Plated
 Applicable Wire:20AWG~26AWG
 20AWG Wire,OD 1.6mm Max.
 24AWG Wire,OD 1.3mm Max.



Part No	Wire Apply	A	B	C	D
NF-FT-20	20-22AWG	2.33Ref.	1.97Ref.	1.94	2.14
NF-FT-24	24-26AWG	2.12Ref.	1.39Ref.	2.00	1.45

NF-FT-20

NF-FT-24

Section:A-A'

Section:B-B'

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


X. ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

PPOJECTION

ORDER INFORMATION


NF-FT-xx-LF
 SERIES
 LEADFREE
 24:24~26 AWG
 20:20~22 AWG
 TIN
 FEMALE TERMINAL

DESCRIPTION: 2.5mm Power Housing Terminal

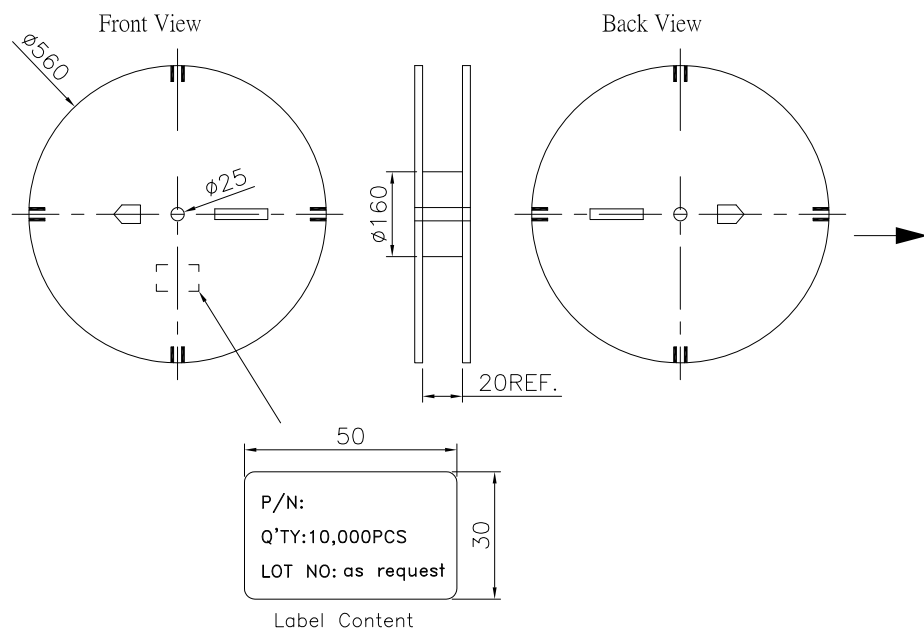

Note:

- Tape Size: $\phi 560 \times 25$, A=A, T=5mm; Paper Shaft: $\phi 160 \times 25$, T=20mm;
- Direction all the same as above, only available after plating, separate each layer of terminal by putting paper between it.
- Put styrofoam inside to avoid defective terminal, attach label on each tray then place into PE bag.
- QTY: 10Kpcs/Reel
10 Reels/CTN
100Kpcs/CTN

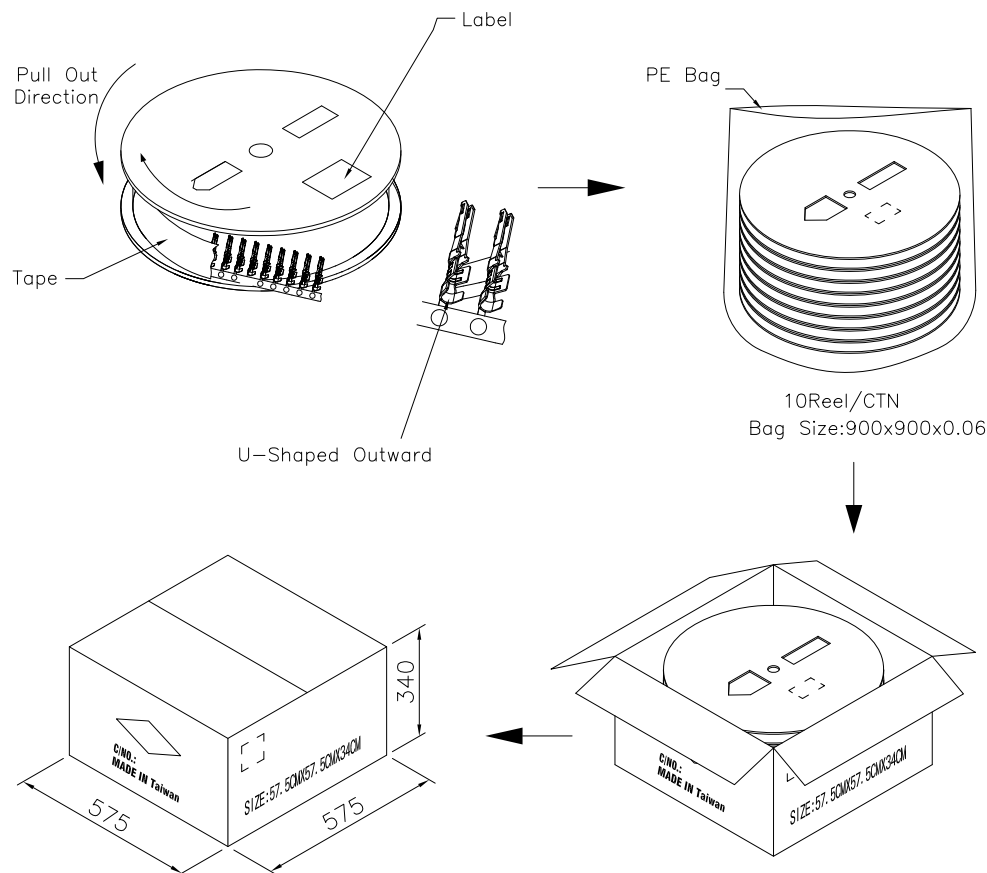

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.15
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

NF-FT-xx-LF
SERIES
LEADFREE
24:24~26 AWG
20:20~22 AWG
TIN
FEMALE TERMINAL

DESCRIPTION: 2.5mm Power Housing Terminal