


Specifications:


Current rating:6.5A AC,DC
 Voltage rating:250V AC, DC
 Contact resistance:10m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:AC 1500V AC/minute
 Operating Temperature:-40°C ~ +105°C

Materials:

Insulator:High Temp Plastic (LCP UL94V-0)
 Insulator Color:Black & White
 Terminal:Brass
 Finish:Tin Plated

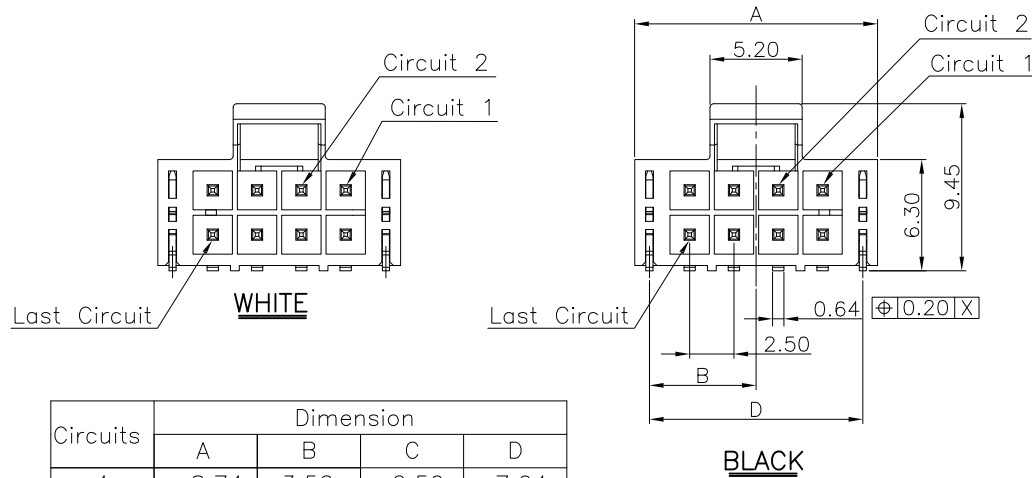

Circuits	Dimension			
	A	B	C	D
4	8.74	3.52	2.50	7.04
6	11.24	4.77	5.00	9.54
8	13.74	6.02	7.50	12.04
10	16.24	7.27	10.00	14.54
12	18.74	8.52	12.50	17.04
14	21.24	9.77	15.00	19.54
16	23.74	11.02	17.50	22.04

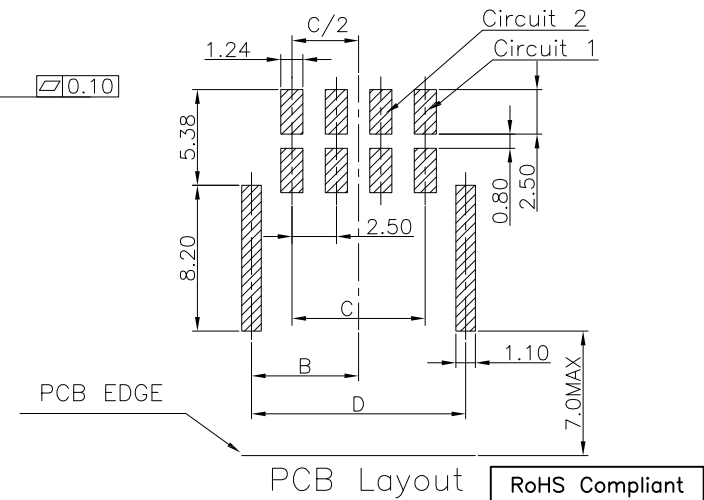

RoHS Compliant

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

照片框

ORDER INFORMATION

NF-PWEcc-2Xxx-LF
 SERIES | LEADFREE
 MALE | 2X02:04WAY
 90°SMT | 2X08:16WAY
 BK:BLACK
 WH:WHITE
 METAL EAR

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: 2.5mm Power Wafer Double Rows SMD Type