

## Features:

- 4 ~ 16 circuits available
- Material: PA4T + 30%GF, UL 94V-0

## Specification:

- Current rating: 4A AC, DC
- Voltage rating: 250V AC, DC
- Insulation resistance: 1000M $\Omega$  Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

### Dimensional Information ( mm )








Circuits	Dim. A	Dim. B
N	1.25 x N - 2.5	1.25 x N + 2.7

&& N = 4 ~ 16

## Ordering Information

Part No.	Color	
NF-SHBK-2Xxx	Black	Key A
NF-SHWH-2Xxx	Natural	Key B

&& xx = 04 ~ 16

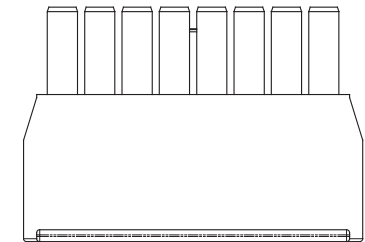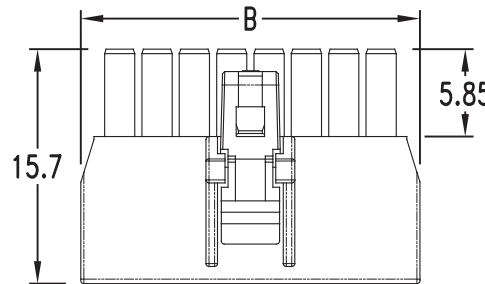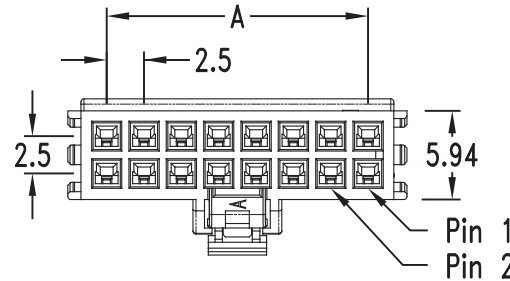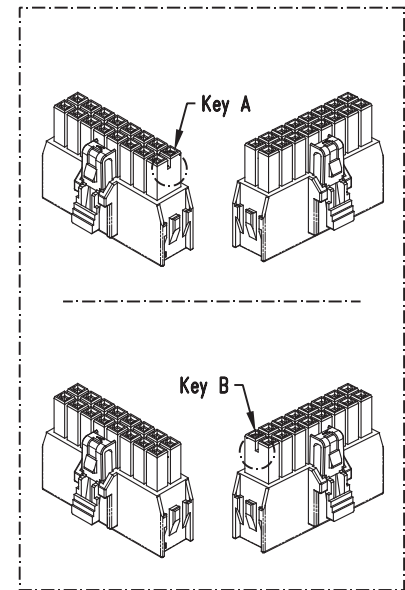

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$   
.X  $\pm$  0.40  
.XX  $\pm$  0.25  
.XXX  $\pm$  0.08  
ANG  $\pm$

PJECTION

照片框

ORDER INFORMATION

NF-SHxx-2Xxx-LF  
SERIES | LEADFREE  
2X02:04WAY  
2X08:16WAY  
FEMALE | BK:BLACK  
WH:WHITE  
HOUSING

DESCRIPTION: .098"(2.5mm) Dual Row Receptacle Housing