

Features:

- 2 ~ 8 circuits available
- ⚠ • Material: Nylon 9T, UL 94V-0

Specification:

- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)



Circuits	Dim. A	Dim. B
N	$2.5 \times (N - 1)$	$2.5 \times N + 2.7$

&& N = 2 ~ 8

Ordering Information

Part No.	Color	
NF-SRBK-1Xxx	Black	Key A
NF-SRWH-1Xxx	Natural	Key B

&& xx = 02 ~ 08

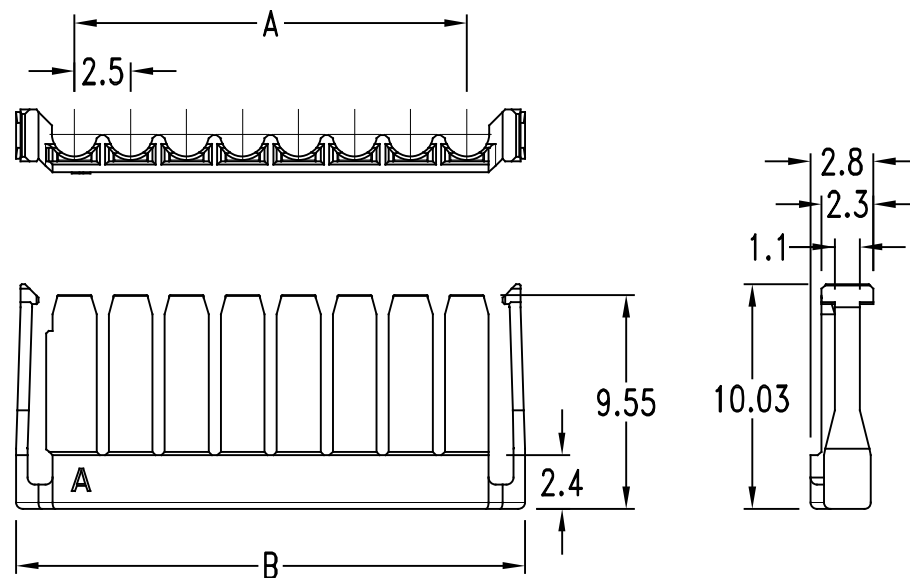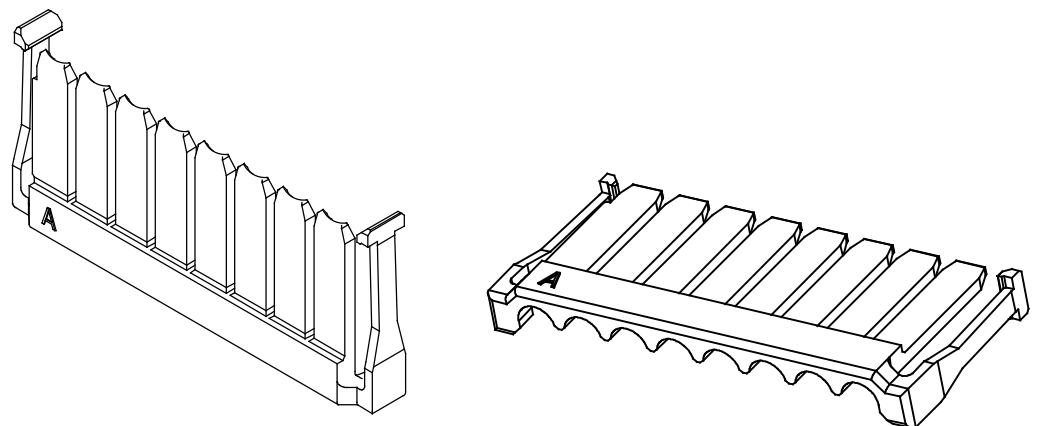

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

NF-SRxx-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X08:08WAY
BK:BLACK
WH:WHITE
SR

DESCRIPTION: .098"(2.5mm) Terminal Position Assurance Retainer