
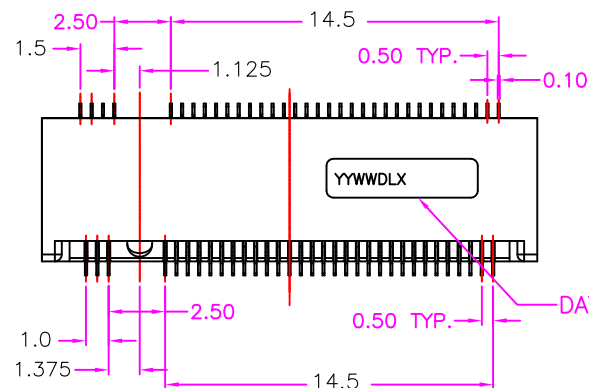
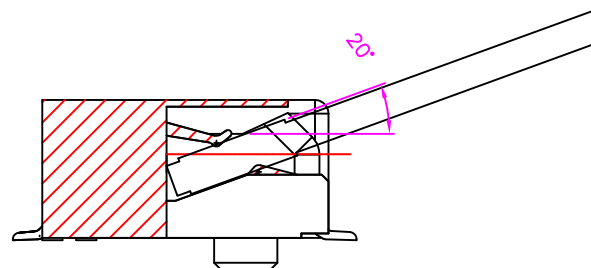
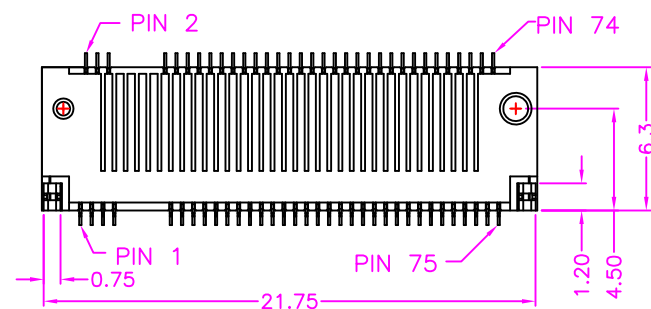
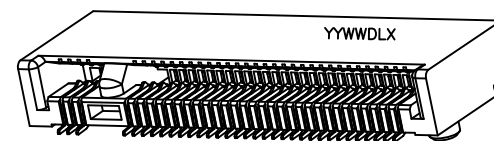



SECTION A-A
SCALE 2:1

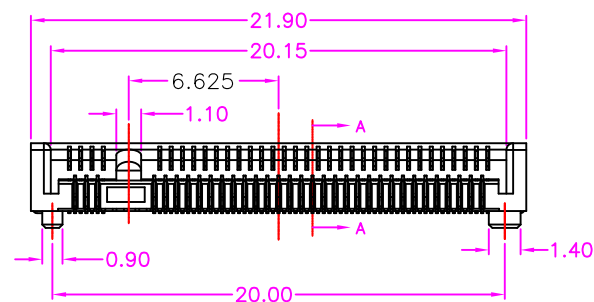

MATING SIMILAR
SCALE 2:1

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
SOLDER PEG: STAINLESS STEEL, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 300V AC FOR ONE MINUTE
CONTACT RESISTANCE: 55m OHMS MAX
INSULATION RESISTANCE: 500M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+80°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°


照片框

ORDER INFORMATION

NGFF-W32R-0760-LF



SERIES REEL HIGH 3.2mm 90°SMT
LEADFREE
07+60 WAY

DESCRIPTION: NGFF(M.2), 0.5mm PITCH, PCB MOUNT, SMT, 1 KEY WITH PAD H=3.20mm, FEMALE

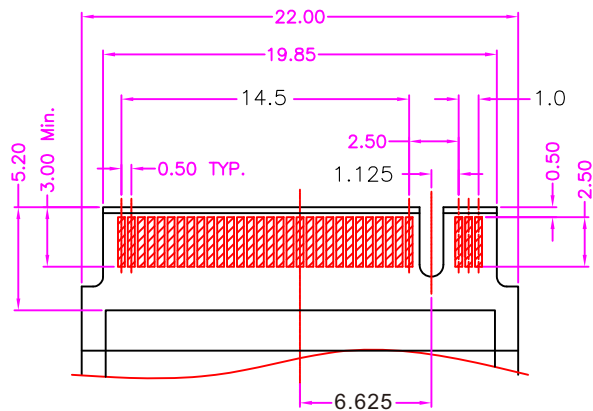


BOTTOM SIDE


PLUG PCB

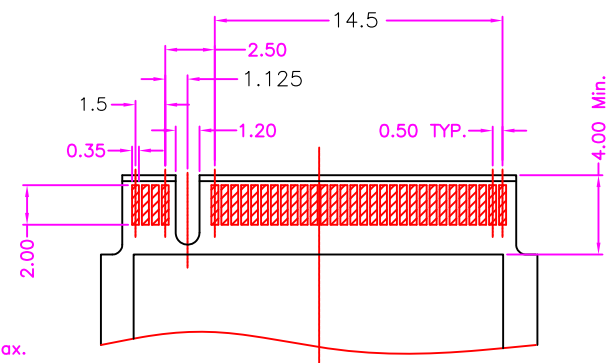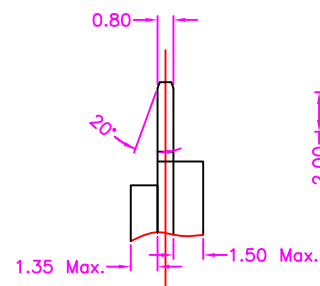

TOP SIDE

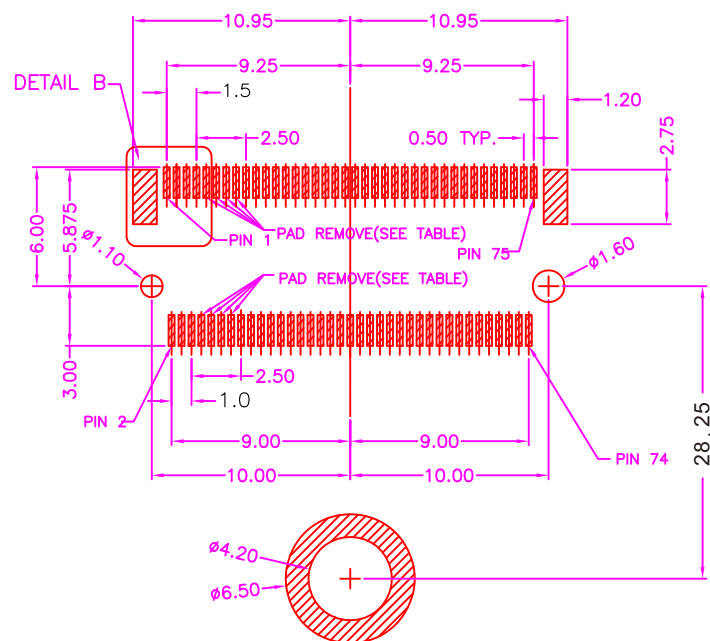

P.C.B. LAYOUT
TOP VIEW ± 0.05



DETAIL B
SCALE 2:1

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X. ± 0.30

.XX. ± 0.20

.XXX. ± 0.10

ANG $\pm 1^\circ$

PPOJECTION

照片框

ORDER INFORMATION

NGFF-W32R-0760-LF





SERIES REEL LEADFREE

07+60 WAY

HIGH 3.2mm

90°SMT

DESCRIPTION: NGFF(M.2), 0.5mm PITCH, PCB MOUNT, SMT, 1 KEY WITH PAD H=3.20mm, FEMALE

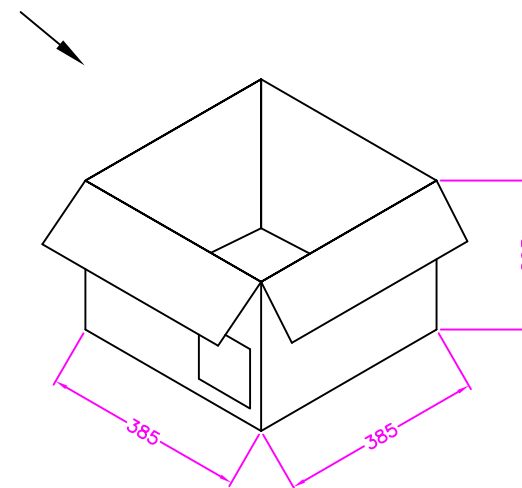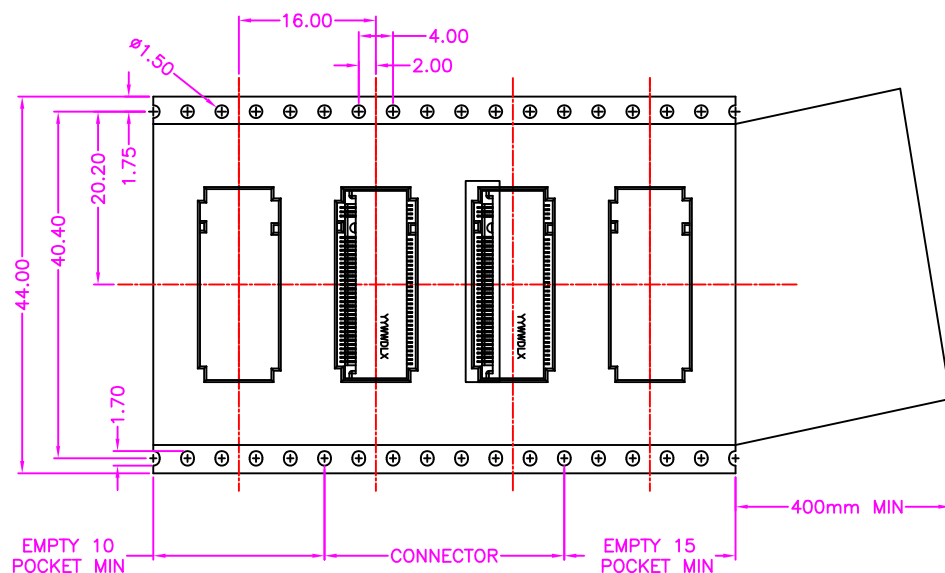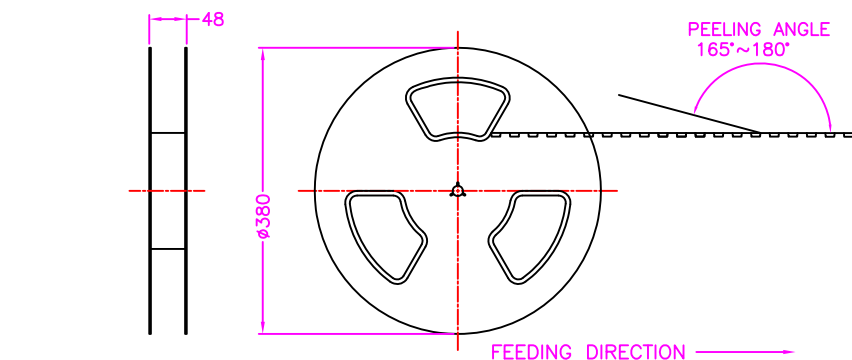

NOTE: 1400PCS/ REEL, 7000PCS/ 5 REEL/ CARTON

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

NGFF-W32R-0760-LF

SERIES LEADFREE

07+60 WAY

REEL

HIGH 3.2mm

90°SMT

DESCRIPTION: NGFF(M.2), 0.5mm PITCH, PCB MOUNT, SMT, 1 KEY WITH PAD H=3.20mm, FEMALE