

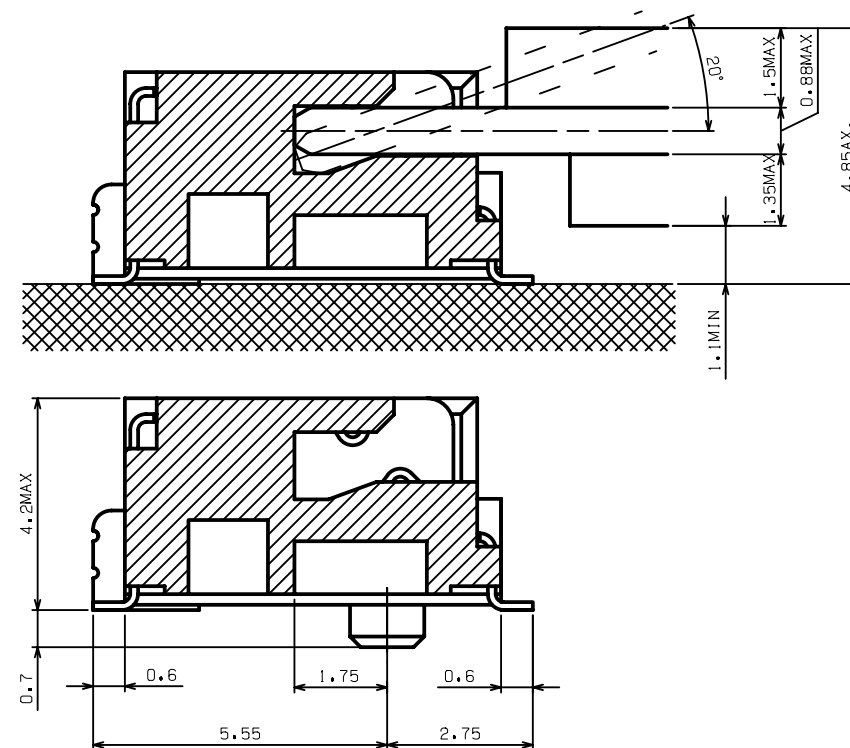
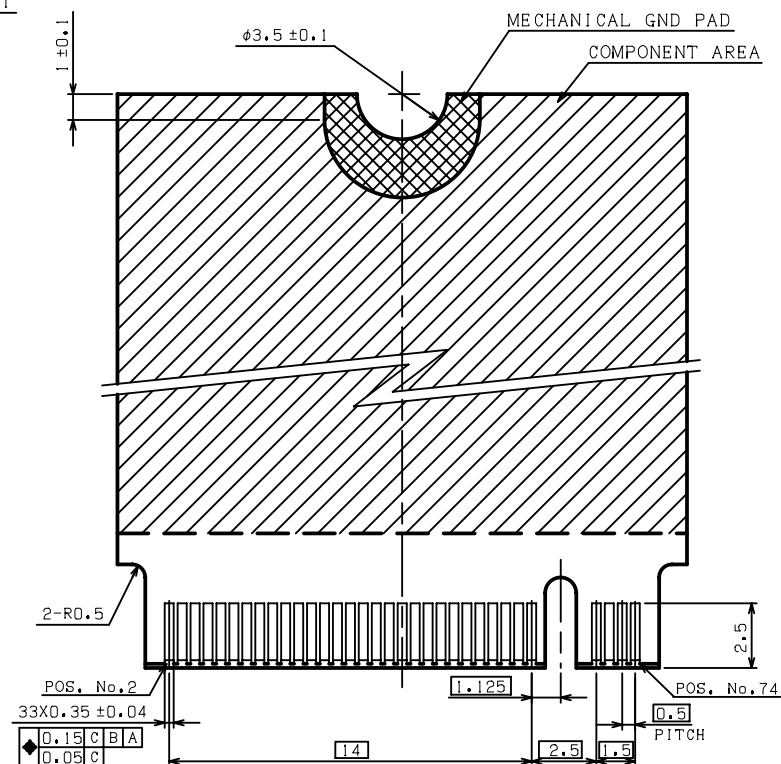


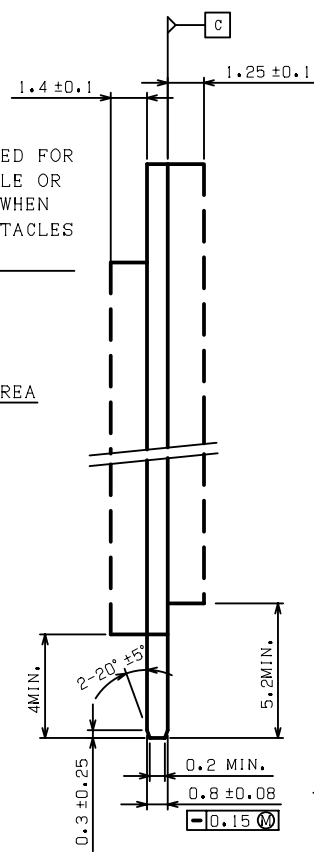

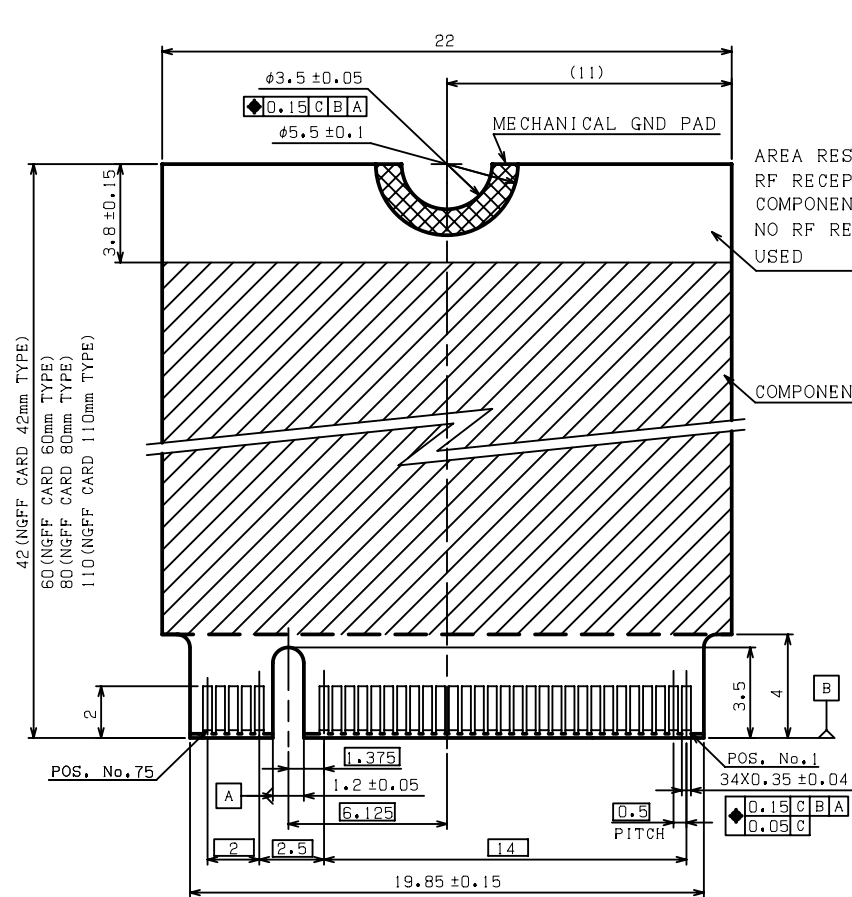

KEY ID "M"

RECOMMENDED MODULE LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION


X. ± 0.50

X. ± 0.25

.XX ± 0.12

.XXX $\pm$

ANG $\pm$



ORDER INFORMATION

NGFF-W42R-5809-LF

SERIES

REEL



HIGH 4.2mm
90°SMT

LEADFREE

58+09 WAY


DESCRIPTION: M.2 CONNECTOR KEY ID "M" 0.5mm PITCH 4H ASS

DIRECTION OFF TOP OF REEL

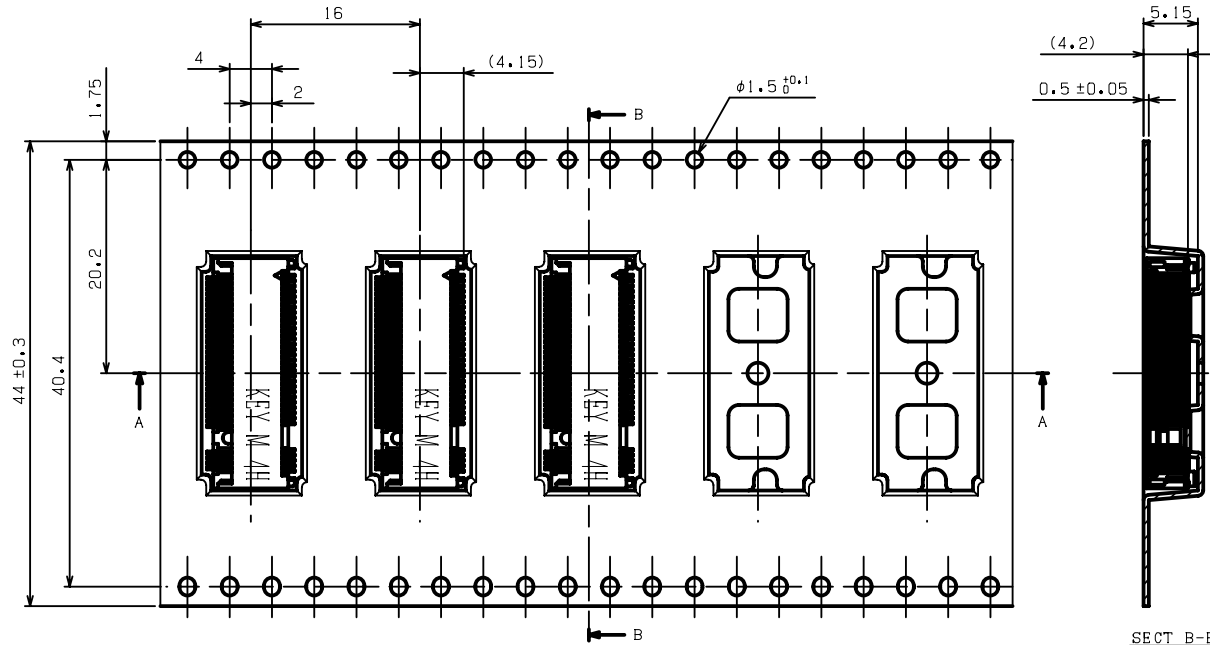

SECT A-A

SECT B-B

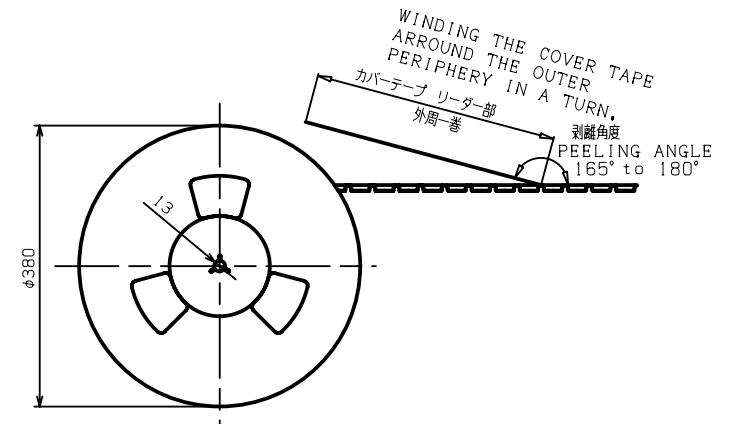

NOTES:

1. THE DIRECTION OF EACH CONNECTOR ON A EMBOSS IS REFERED TO THIS DRAWING.
2. GENERAL TOLERANCE : ± 0.5 , $\pm 3^\circ$
3. PACKAGED IN EMBOSS TAPE AND PLASTIC REEL 1000 PCS PRE REEL.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50


.X ± 0.25

.XX ± 0.12

.XXX $\pm$

ANG $\pm$

PPOJECTION



ORDER INFORMATION

NGFF-W42R-5809-LF

SERIES

LEADFREE

58+09 WAY

REEL

HIGH 4.2mm

90°SMT

DESCRIPTION: M.2 CONNECTOR KEY ID "M" 0.5mm PITCH 4H ASS'