
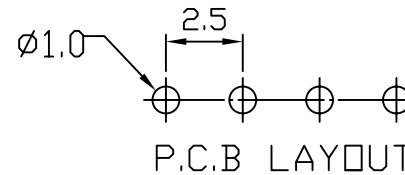
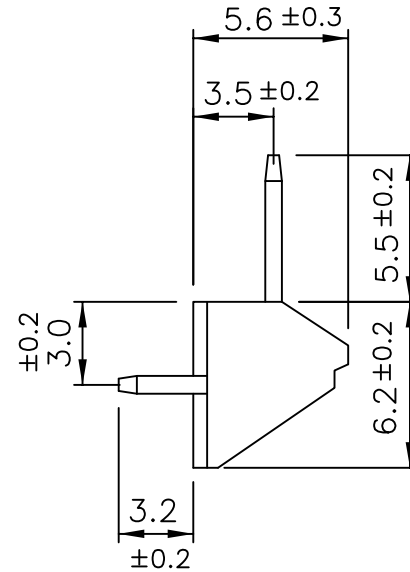


MAT'L: BODY: NYLON 66 UL94V-0
 PINS: BRASS TIN PLATED
 CURRENT RATING: 3A AC, DC
 VOLTAGE RATING: 250V AC, DC

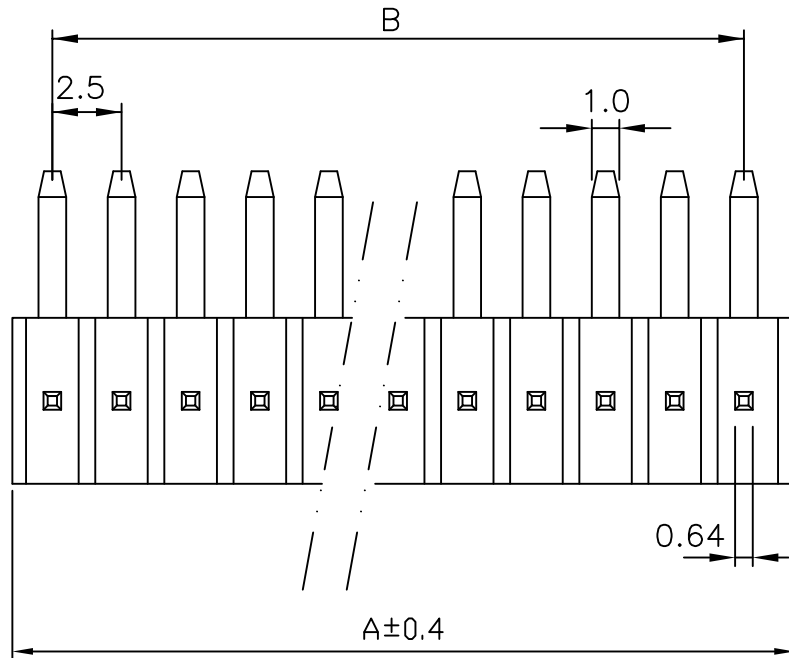

NO.	A	B
02	5.0	2.5
03	7.0	5.0
04	10.0	7.5
05	12.5	10.0
06	15.0	12.5
07	17.5	15.0
08	20.0	17.5
09	22.5	20.0
10	25.0	22.5
11	27.5	25.0
12	30.0	27.5
13	32.5	30.0
14	35.0	32.5
15	37.5	35.0
16	40.0	37.5
17	42.5	40.0
18	45.0	42.5
19	47.5	45.0
20	50.0	47.5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1:1
 DATE

X.±
 .X±
 .XX±
 .XXX±
 ANG±

照片框

ORDER INFORMATION

NH-R-xx-LF
 SERIES | LEADFREE
 02~20WAY
 DIP 90°

煜倫股份有限公司

www.morethanall.com

SIZE A4 PROJECTION

DESCRIPTION: