

【NOTE】

- Lead co-planarity (Lead 평탄도) : ☆ Max 0.08mm (0.08mm 이하)
- After Re-flow lead co-planarity : ☆ Max 0.08mm (Reflow 후 평탄도 : ☆ 0.08mm 이하)
- 220°C Lead co-planarity (220°C Lead 평탄도) : Max 0.08mm (0.08mm 이하)
- ☆ = CTF (☆ 는 CTF 항목) / ★ = CTQ (★ 는 CTQ 항목)
- No rust, contamination, damage nor deformation effecting on function. (제품 기능 및 성능에 유해한 BURR, 변형, 휨, 이물질 등이 없을 것.)

【TABLE】

No.	PART	MATERIAL	FINISH
A	BASE INSULATOR	LCP SZ6505	Black color
B	CONTACT TERMINAL	Phosphor Bronze C5210-EH t:0.080mm	Nickel Barrier ☆Contact : Au 0.1~0.4µm over Nickel 1.5~5µm Lead : Au flash 0.05µm Min over Ni 1.5~5µm
C	FITTING NAIL	Phosphor Bronze C5210-H t:0.080mm	Sn 1.0~5.0µm over Nickel 1.0~5.0µm

【환경규제 준수】

(OQA-2049)에 지정된 환경관리 물질을 사용하지 말 것.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.25

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION

照片框


ORDER INFORMATION

NP03514-P01X-060-LF


SERIES

LEADFREE
60 WAY
NON POST
UNMATED HIGH 0.1mm
MALE


DESCRIPTION: BTB 0.35PITCH H=0.8mm PLUG

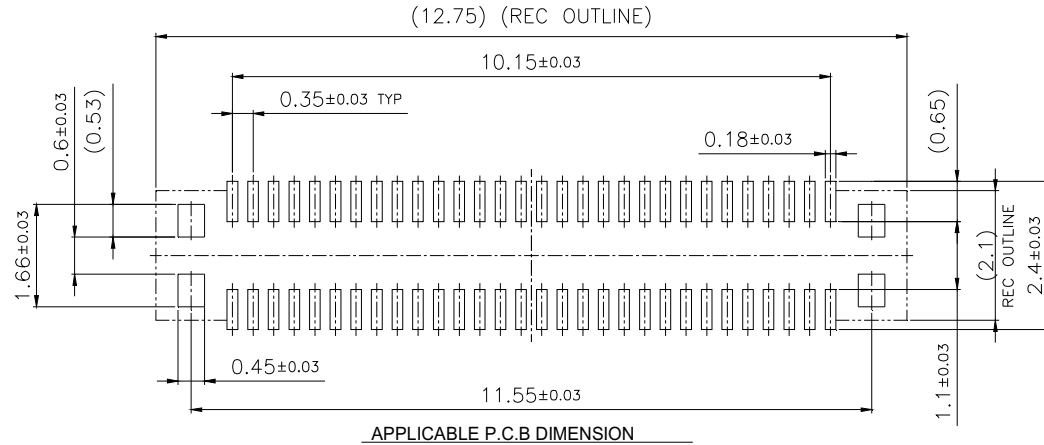

<<Recommended window size of metal mask>>

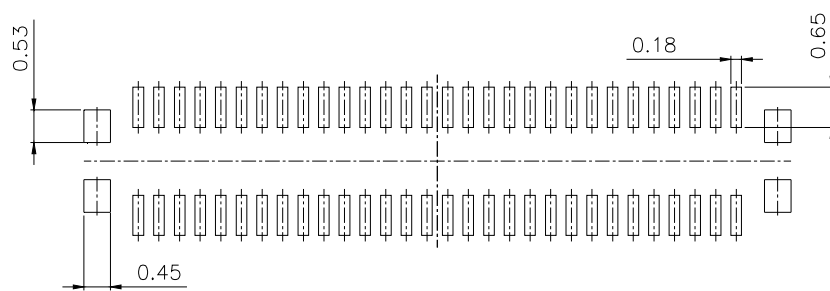

MASK (Thickness : 0.10mm)

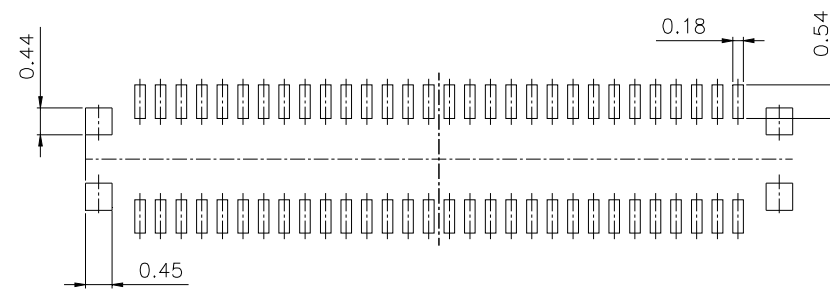

MASK (Thickness : 0.12mm)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X ± 0.25

CHECKED BY GENIUS

X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.10

DATE

.XXX ±

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

NP03514-P01X-060-LF

SERIES

LEADFREE
60 WAY
NON POST
UNMATED HIGH 0.1mm
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: BTB 0.35PITCH H=0.8mm PLUG