
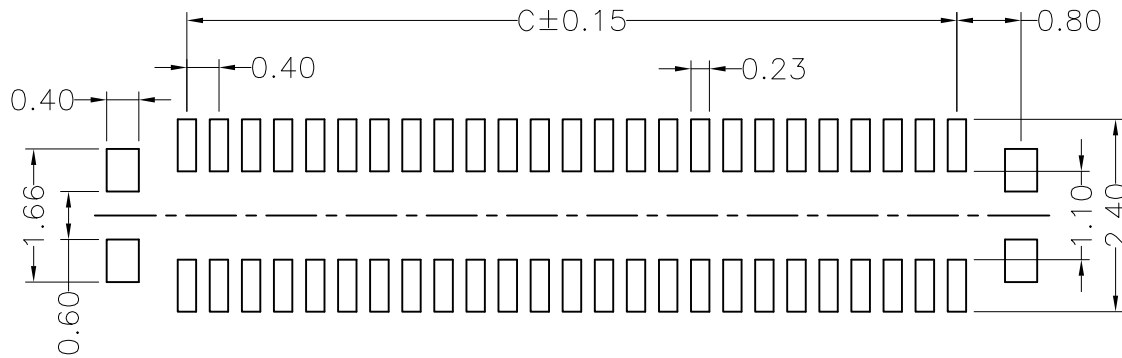



→ 0.14\*0.08 TYP.

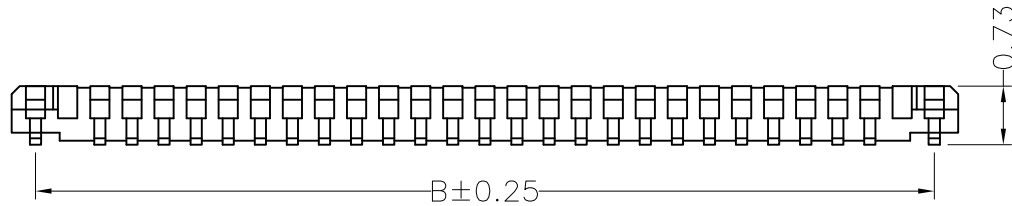

RECOMMENDED PCB LAYOUT  
CONNECTOR SIDE

- SPECIFICATIONS:
- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
  - 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
  - 3.INSULATION RESISTANCE: 50MΩ MIN;
  - 4.CONTACT RESISTANCE: 100mΩ MAX;
  - 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;
- 3.METAL FITTINGS: COPPER ALLOY.

PLATING:

- 1.TERMINAL: GOLD PLATING,  
NICKEL 50u" MIN. OVER ALL;
- 2.METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u"MIN.

PIN NO.	A	B	C
10	3.80	3.20	1.60
24	6.60	6.00	4.40
30	7.80	7.20	5.60
34	8.60	8.00	6.40
36	9.00	8.40	6.80
40	9.80	9.20	7.60
50	11.80	11.20	9.60
60	13.80	13.20	11.60

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.20  
.XX ± 0.15  
.XXX ± 0.10  
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

NP0407-P01X-xxx-LF

SERIES

LEADFREE

010-060WAY

NON POST

UNMATED HIGH 0.1mm

MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: