

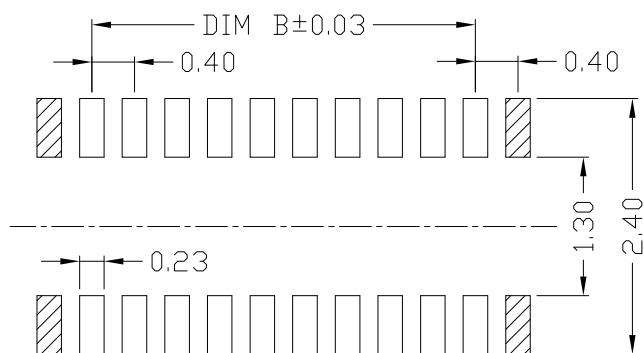
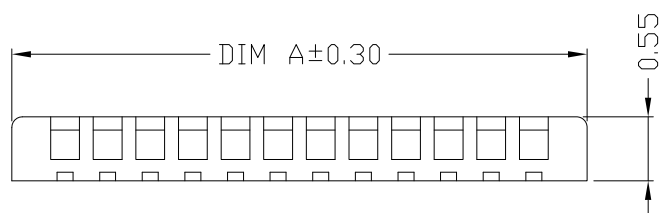


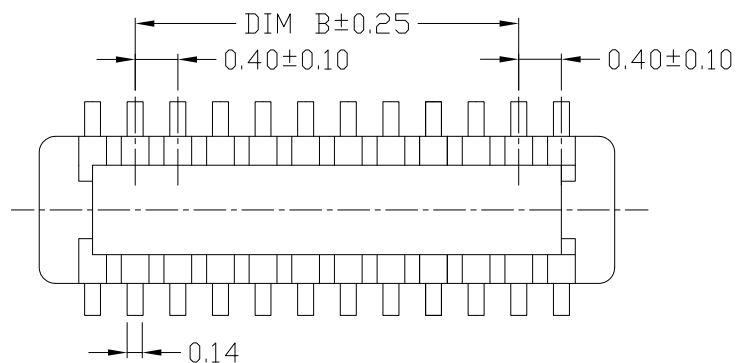

RECOMMENDED PCB LAYOUT

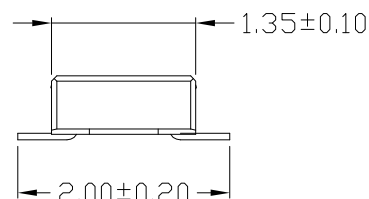

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 50V/AC, DC;
 - 2.WITHSTANDING VOLTAGE: 150V AC ONE MINUTE;
 - 3.INSULATION RESISTANCE: 50M Ω MIN.;
 - 4.CONTACT RESISTANCE: 100m Ω MAX.;
 - 5.OPERATING TEMPERATURE RANGE: -35° C TO 105° C.
- MATERIAL:
- 1.INSULATOR: LCP UL 94V-0 BLACK;
 - 2.TERMINAL: COPPER ALLOY;
- PLATING:
- 1.TERMINAL: GOLD PLATING NICKEL 50u" MIN. OVER ALL;

PIN NO.	DIM A	DIM B
10	3.40	1.60
16	4.60	2.80
24	6.20	4.40
30	7.40	5.60
32	7.80	6.00
34	8.20	6.40
40	9.40	7.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$ 0.50
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

NP0413-P01X-xxx-LF

SERIES

LEADFREE

010~040WAY

NON POST

UNMATED HIGH 0.1mm

PLUG

DESCRIPTION: BTB PITCH0.40 HEADER H0.7