

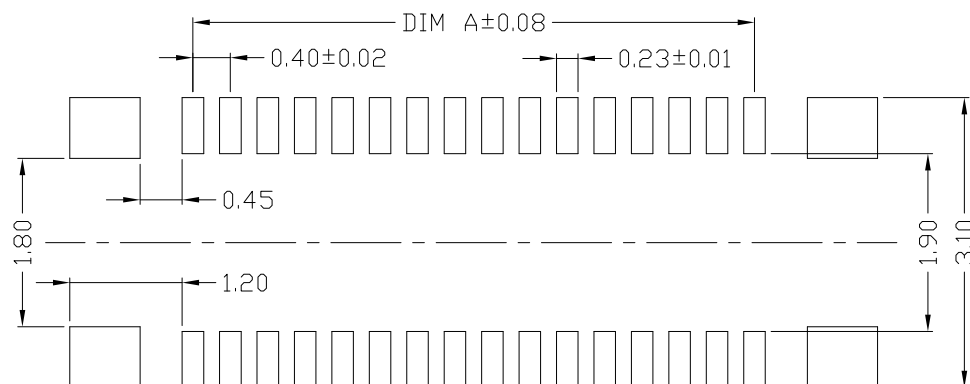
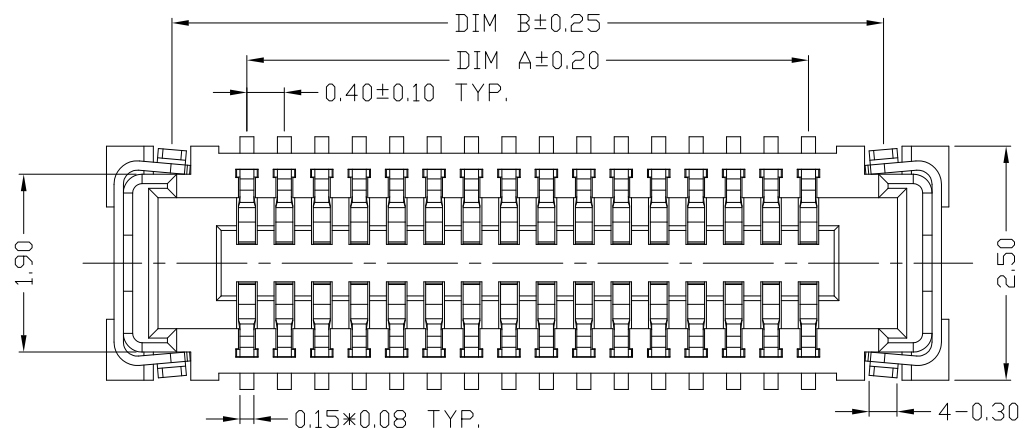




RECOMMENDED PCB LAYOUT

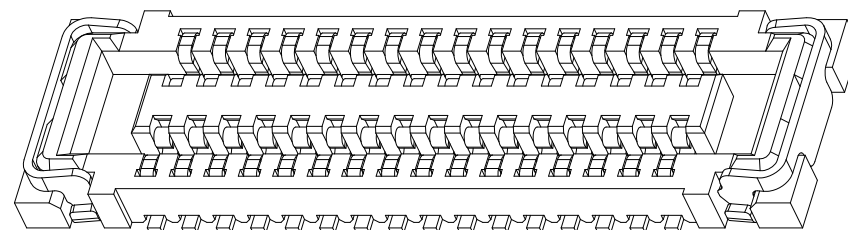

PIN NO.	DIM A	DIM B	DIM C
10	1.60	3.20	4.60
26	4.80	6.40	7.80
30	5.60	7.20	8.60
32	6.00	7.60	9.00
40	7.60	9.20	10.60

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 50V/AC, DC;
- 2.WITHSTANDING VOLTAGE: 150V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M Ω MIN.;
- 4.CONTACT RESISTANCE: 100m Ω MAX.;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 105° C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;

PLATING:

- 1.TERMINAL: GOLD PLATING NICKEL 50u" MIN. OVER ALL;

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$ 0.50

.X $\pm$ 0.30

.XX $\pm$ 0.20

.XXX $\pm$ 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

NP0413-S06X-xxx-LF

SERIES

LEADFREE

010~040WAY

NON POST

UNMATED HIGH 0.6mm

FEMALE

DESCRIPTION: BTB PITCH0.40 SOCKET H0.7