


PIN NO.	A	B
10	1.60	3.15
20	3.60	5.15
24	4.40	5.95
30	5.60	7.15
34	6.40	7.95
40	7.60	9.15
50	9.60	11.15
60	11.60	13.15

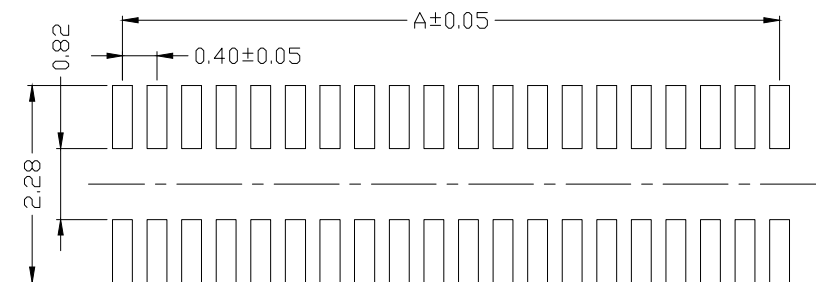

RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 50V/AC, DC;
- 2.WITHSTANDING VOLTAGE: 150V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M_Ω MIN.;
- 4.CONTACT RESISTANCE: 100m_Ω MAX.;
- 5.OPERATING TEMPERATURE RANGE: -35^e C TO 105^e C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
 - 2.TERMINAL: COPPER ALLOY;
- PLATING:
- 1.TERMINAL: GOLD PLATING NICKEL 50u" MIN. OVER ALL;

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ±

PJECTION

照片框

ORDER INFORMATION

NP04146-P01XR-xxx-LF

SERIES

REEL


NON POST

UNMATED HIGH 0.1mm

MALE


LEADFREE
010-060WAY

DESCRIPTION:

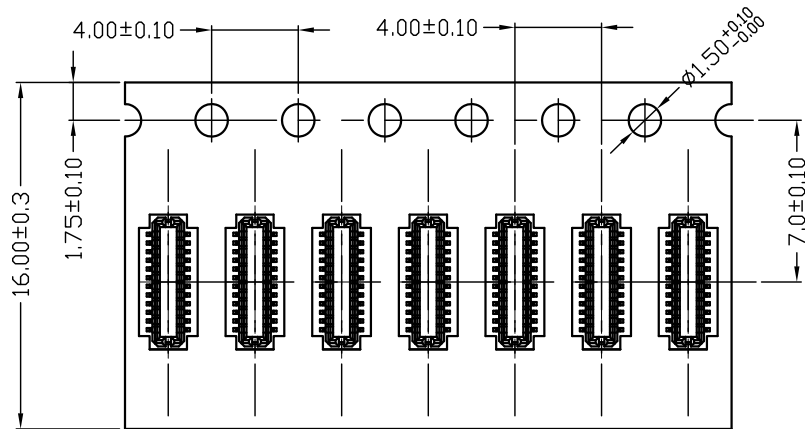

规格及包装数量如下:

1.每卷 (REEL) 装放10000PCS产品.

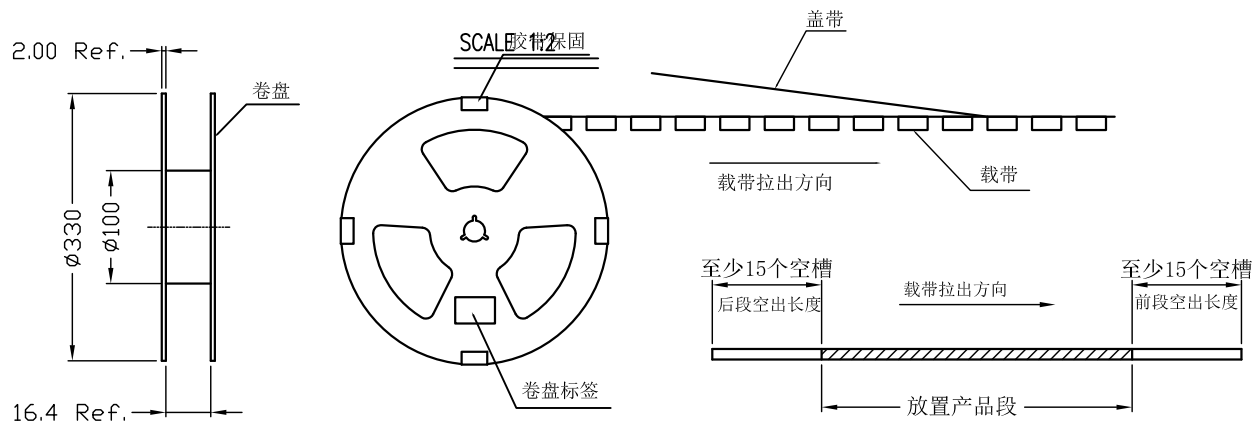

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.15

ANG ± 2°

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

NP04146-P01XR-xxx-LF

SERIES

LEADFREE

010-060WAY

REEL

NON POST

UNMATED HIGH 0.1mm

MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 公座包装图