

RECOMMENDED PCB LAYOUT  
CONNECTOR SIDE

PIN NO.	A	B
10	1.60	4.22
16	2.80	5.42
24	4.40	7.02
34	6.40	9.02
40	7.60	10.22

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 50V/AC, DC;
- 2.WITHSTANDING VOLTAGE: 150V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M Ω MIN.;
- 4.CONTACT RESISTANCE: 100m Ω MAX.;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 105° C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;

PLATING:

- 1.TERMINAL: GOLD PLATING NICKEL 50μ" MIN. OVER ALL;

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ± 0.30  
.XX ± 0.25  
.XXX ± 0.15  
ANG ±

PJECTION

照片框


ORDER INFORMATION

NP04146-S09XR-xxx-LF

SERIES


LEADFREE  
010-040WAY  
REEL  
NON POST  
UNMATED HIGH 0.9mm  
FEMALE

DESCRIPTION:

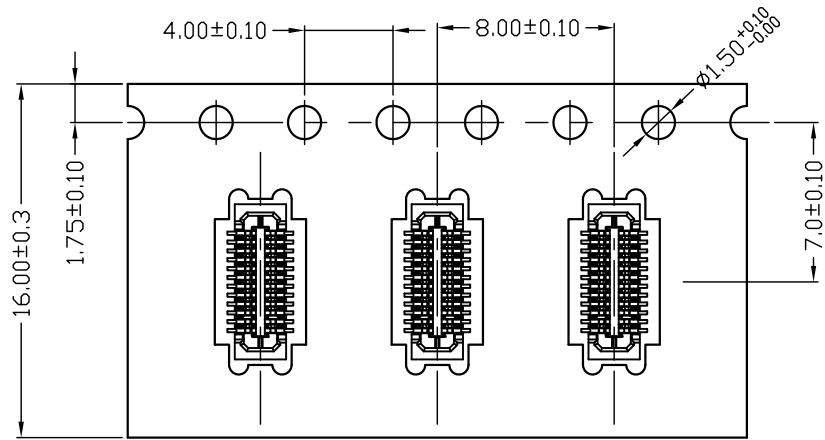

规格及包装数量如下:

1.每卷 (REEL) 装放5000PCS产品.

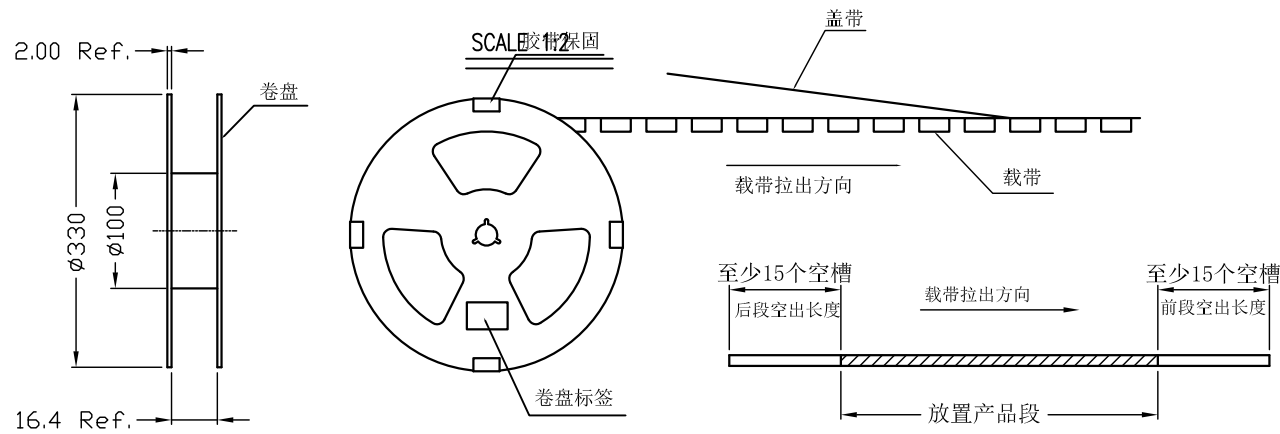

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.25  
.XXX ± 0.15  
ANG ± 2°

P PROJECTION

照片框

ORDER INFORMATION

NP04146-S09XR-xxx-LF

SERIES

LEADFREE  
010-040WAY  
REEL  
NON POST  
UNMATED HIGH 0.9mm  
FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 母座包装图