



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

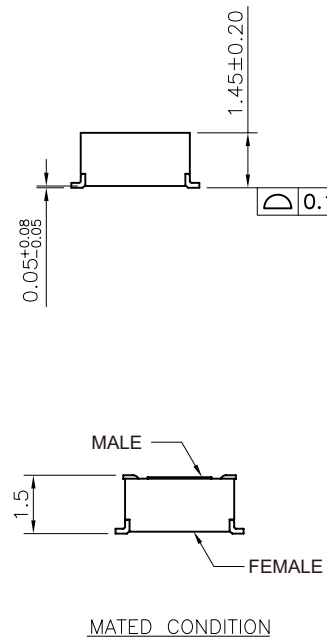

- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0. COLOR: BLACK.
 - CONTACT: COPPER ALLOY.
 - FINISH:
 - CONTACT:
 - 50~100u" NICKEL UNDERPLATING OVERALL.
 - GOLD FLASH PLATING ON CONTACT AREA.
 - 15u" MIN GOLD PLATING ON CONTACT AREA.
 - SOLDER:
 - 50~100u" NICKEL UNDERPLATING OVERALL.
 - GOLD FLASH PLATING ON SOLDER TAILS.
 - GOLD FLASH PLATING ON SOLDER TAILS.
 - REFLOW SOLDER CAPABLE TO 260°C

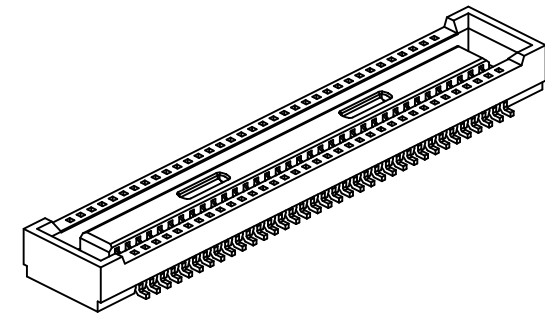

CKT	Dim A	Dim B
10	1.60	4.60
20	3.60	6.60
24	4.40	7.40
30	5.60	8.60
40	7.60	10.60
60	11.60	14.60
70	13.60	16.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°

PJECTION

照片框

ORDER INFORMATION

NP04185-S14X-xxx-LF

SERIES

LEADFREE

010~070 WAY

NON POST

UNMATED HIGH 1.45mm

FEMALE

DESCRIPTION: