

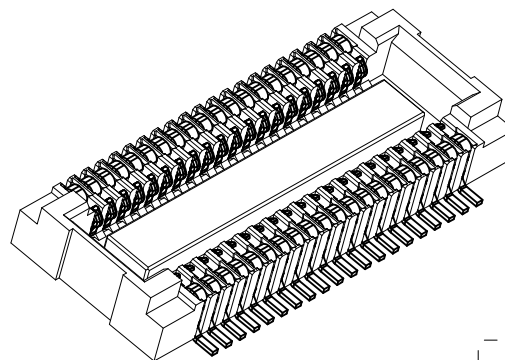
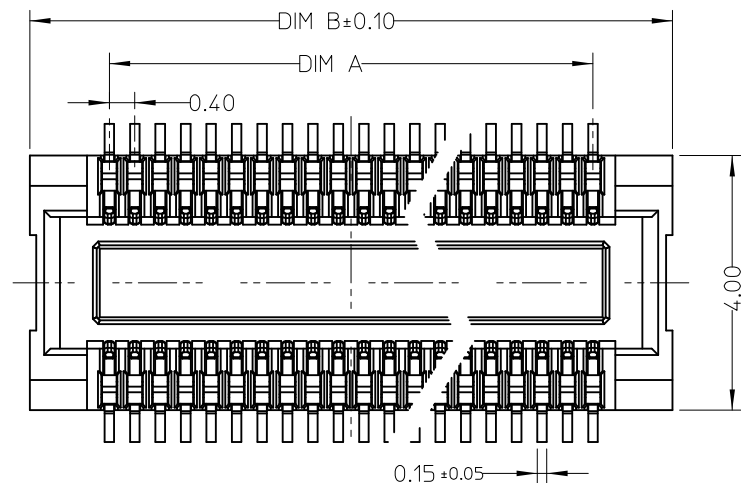
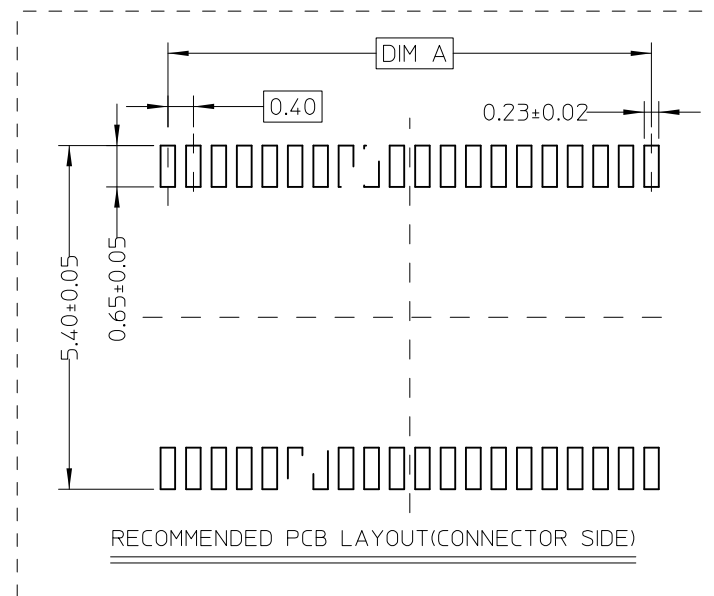
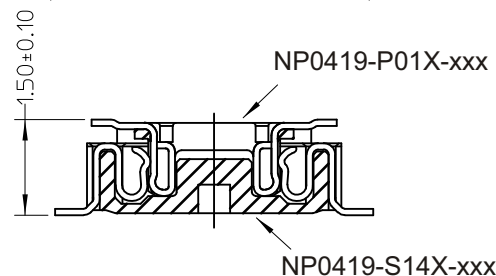
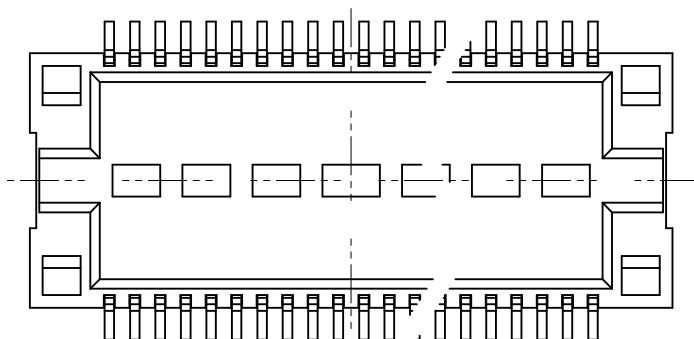


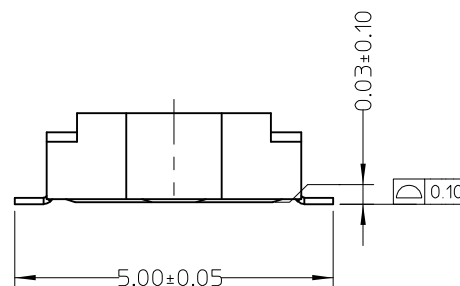

60	NP0419-S14X-060	11.60	14.10
50	NP0419-S14X-050	9.60	12.10
40	NP0419-S14X-040	7.60	10.10
34	NP0419-S14X-034	6.40	8.90
30	NP0419-S14X-030	5.60	8.10
24	NP0419-S14X-024	4.40	6.90
20	NP0419-S14X-020	3.60	6.10
CIRCUIT SIZE	PART NUMBER	DIM A	DIM B

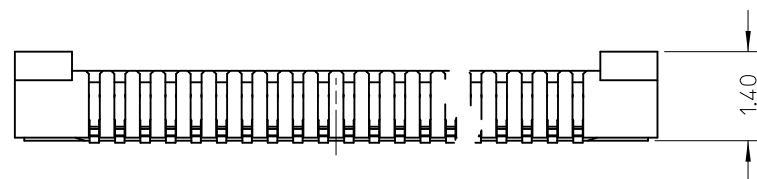

NOTE:

1. MATERIAL

HOUSING MATERIAL: LCP, COLOR: BLACK;

CONTACT MATERIAL: COPPER ALLOY, GOLD PLATED AT CONTACT AREA;

2. PERFORMANCE:

CONTACT RESISTANCE: 80mOHM Max.

DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE;

INSULATION RESISTANCE: 100MOHM Min.

DURABILITY: 30 CYCLES Min.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP0419-S14X-xxx-LF

SERIES

LEADFREE
020~060WAY

NON POST
UNMATED HIGH 1.4mm
FEMALE

DESCRIPTION: BOARD TO BOARD CONN 0.40MM PITCH, FEMALE 1.50MM MATING HEIGHT