
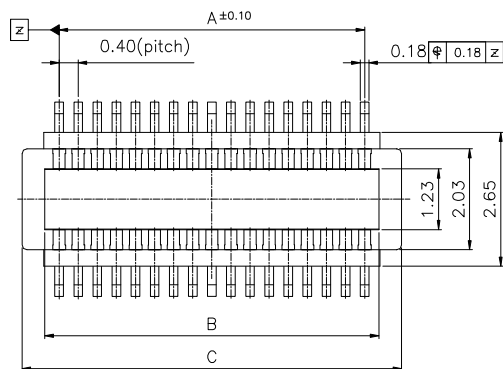


NOTE

1. No rust, contamination, damage nor deformation effecting on function.
2. Resistance : Ⓞ Insulation Resistance - Min 1,000MΩ
Ⓞ Contact Resistance - Max 20mΩ
3. TITLE -> ** number of PINS

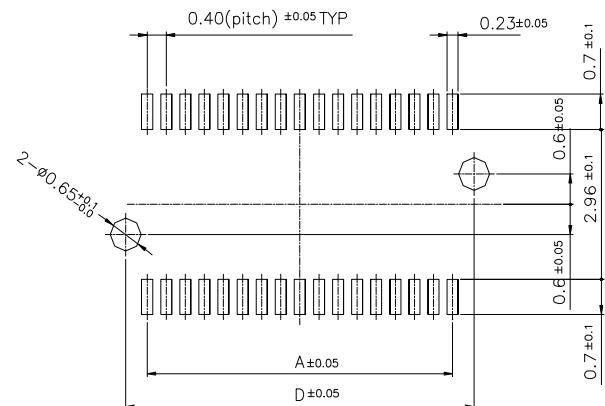

APPLICABLE P.C.B DIMENSION

NO	DESCRIPTION	MATERIAL	FINISH
A	BASE	LCP	BLACK COLOR
B	TERMINAL	PHOS-BRONZE t:0.100mm	CONTACT AREA- Au 0.1μm Min over Nickel NOT CONTACT AREA- Au flash

PINS \ POSITION	A	B	C	D
16	2.80	3.40	4.35	3.70
18	3.20	3.80	4.75	4.10
20	3.60	4.20	5.15	4.50
24	4.40	5.00	5.95	5.30
30	5.60	6.20	7.15	6.50
34	6.40	7.00	7.95	7.30
40	7.60	8.20	9.15	8.50
50	9.60	10.20	11.15	10.50
54	10.40	11.00	11.95	11.30
60	11.60	12.20	13.15	12.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

NP0420-P01P-xxx-LF

SERIES

LEADFREE
016~060WAY

POST
UNMATED HIGH 0.1mm
PLUG

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: