
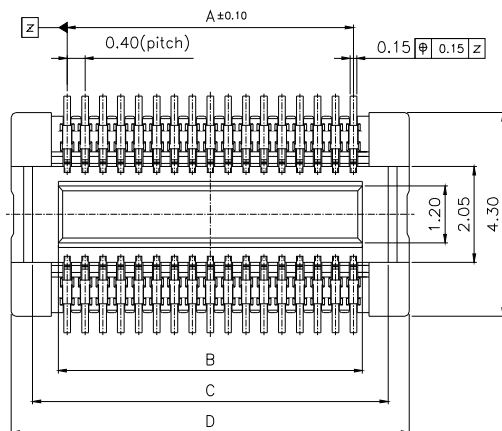


NOTE

1. No rust, contamination, damage no deformation effecting on function.
2. Resistance : ① Insulation Resistance - Min 1,000M Ω
② Contact Resistance - Max 20m Ω
3. TITLE → ** number of PINS

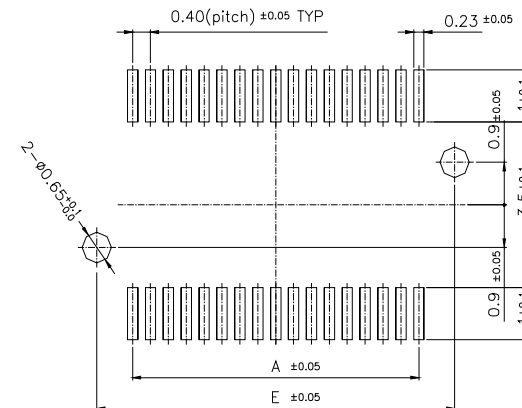

APPLICABLE P.C.B DIMENSION

NO	DESCRIPTION	MATERIAL	FINISH			
A	BASE	PA 9T	BLACK COLOR			
B	TERMINAL	BERYLLIUM COPPER t:0.100mm	Nickel Barrier CONTACT AREA: Au 0.10µm Min over Nickel LEAD AREA: Au 0.10 µm Min over Nickel			
POSITION PINS		A	B	C	D	E
16		2.80	3.20	4.35	5.30	4.40
18		3.20	3.60	4.75	5.70	4.80
20		3.60	4.00	5.15	6.10	5.20
24		4.40	4.80	5.95	6.90	6.00
30		5.60	6.00	7.15	8.10	7.20
34		6.40	6.80	7.95	8.90	8.00
40		7.60	8.00	9.15	10.10	9.20
50		9.60	10.00	11.15	12.10	11.20
54		10.40	10.80	11.95	12.90	12.00
60		11.60	12.00	13.15	14.10	13.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

NP0420-S14P-xxx-LF

SERIES

LEADFREE
016-060WAY

POST
UNMATED HIGH 1.4mm
FEMALE

DESCRIPTION: