






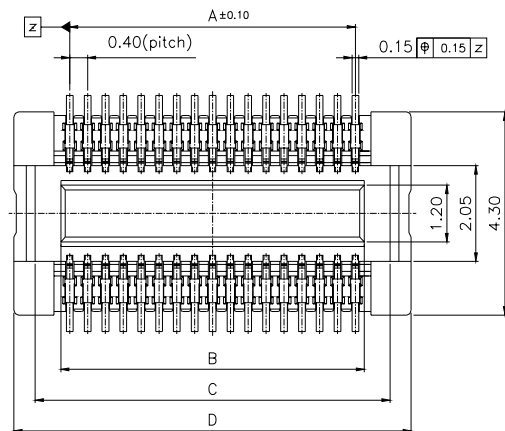


NOTE

1. No rust, contamination, damage no deformation effecting on function.
2. Resistance : ① Insulation Resistance - Min 1,000MΩ
② Contact Resistance - Max 20mΩ

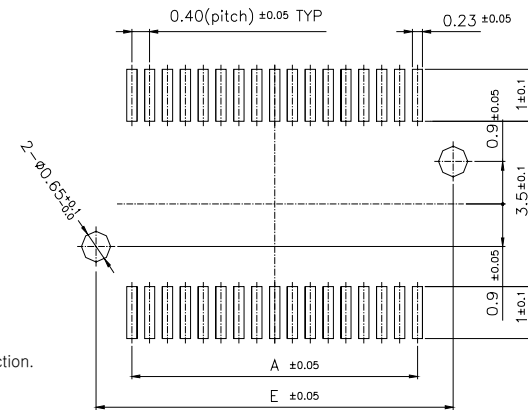

APPLICABLE P.C.B DIMENSION

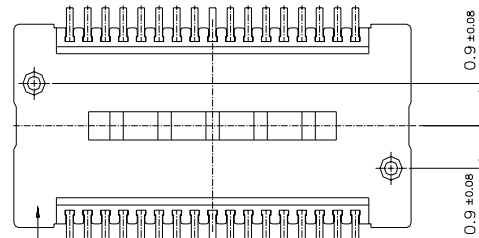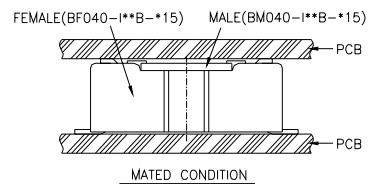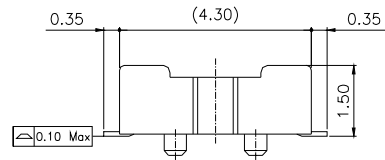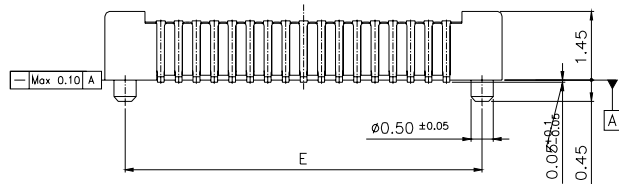

(A) BASE (B) TERMINAL

NO	DESCRIPTION	MATERIAL	FINISH			
A	BASE	PA 9T	BLACK COLOR			
B	TERMINAL	BERYLLIUM COPPER t:0.100mm	Nickel Barrier CONTACT AREA : Au 0.10μm Min over Nickel LEAD AREA : Au 0.10 μm Min over Nickel			
POSITION PINS		A	B	C	D	E
16		2.80	3.20	4.35	5.30	4.40
18		3.20	3.60	4.75	5.70	4.80
20		3.60	4.00	5.15	6.10	5.20
24		4.40	4.80	5.95	6.90	6.00
30		5.60	6.00	7.15	8.10	7.20
34		6.40	6.80	7.95	8.90	8.00
40		7.60	8.00	9.15	10.10	9.20
50		9.60	10.00	11.15	12.10	11.20
54		10.40	10.80	11.95	12.90	12.00
60		11.6	12.00	13.15	14.10	13.20

RoHS Compliant

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

NP0420-S14PR-xxx-LF

SERIES

LEADFREE
016-060WAY
REEL
POST
UNMATED HIGH 1.4mm
FEMALE


DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES


煜倫股份有限公司

www.morethanall.com

1. SPEC` OF PACKING BOX

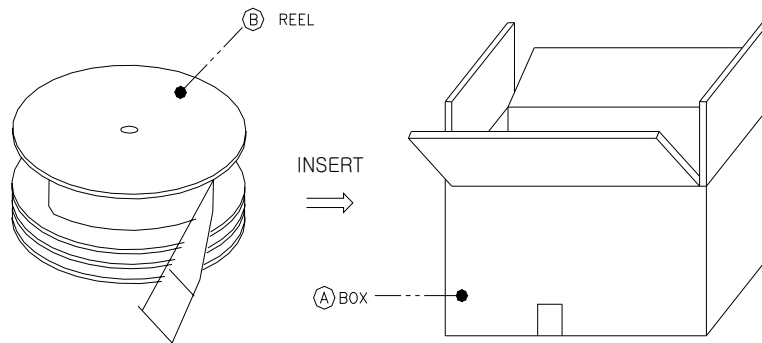

2. SEALING SPEC` OF BOX

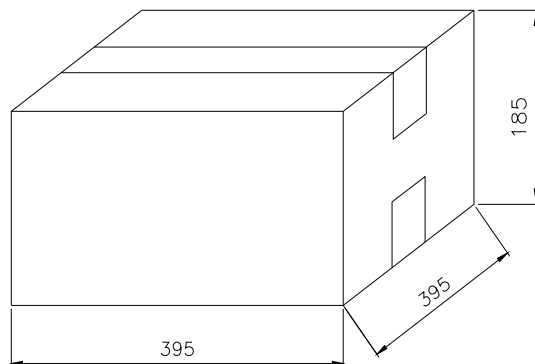

PART NO.	
ITEM	
SPECIFICATION	
QUANTITY	
P / O NO.	
SUPPLIER	
SPEC NO.	
LOT NO.	
The date of manufac-ture	
(date) of the validity	

<< NOTE >>

1. Reel 2,000ea packing .

2. BOX Packing

PINS	REEL	OUTER BOX / REEL
16	2,000ea	2,000ea × 5REEL = 10,000
18	2,000ea	2,000ea × 5REEL = 10,000
20	2,000ea	2,000ea × 5REEL = 10,000
24	2,000ea	2,000ea × 5REEL = 10,000
30	2,000ea	2,000ea × 5REEL = 10,000
34	2,000ea	2,000ea × 5REEL = 10,000
40	2,000ea	2,000ea × 5REEL = 10,000
50	2,000ea	2,000ea × 4REEL = 8,000
54	2,000ea	2,000ea × 4REEL = 8,000
60	2,000ea	2,000ea × 4REEL = 8,000

3. Horizontal packing (REEL)

4. Outer carton box size : 395(width) × 395(length) × 185(high)

5. Adhesive of Label.

NO.	NAME	MATERIAL
A	OUTER CARTON BOX	Corrugated cardboard
B	REEL	HIPS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框


ORDER INFORMATION

NP0420-S14PR-xxx-LF

SERIES


LEADFREE
016~060WAY
REEL
POST
UNMATED HIGH 1.4mm
FEMALE

DESCRIPTION:

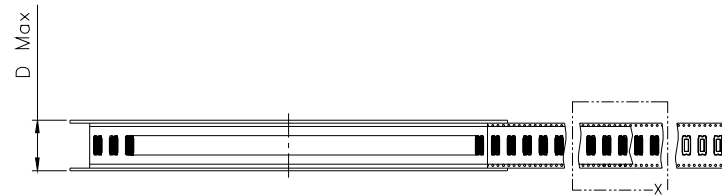


(Scale 1:5)

USER DIRECTION OF FEED

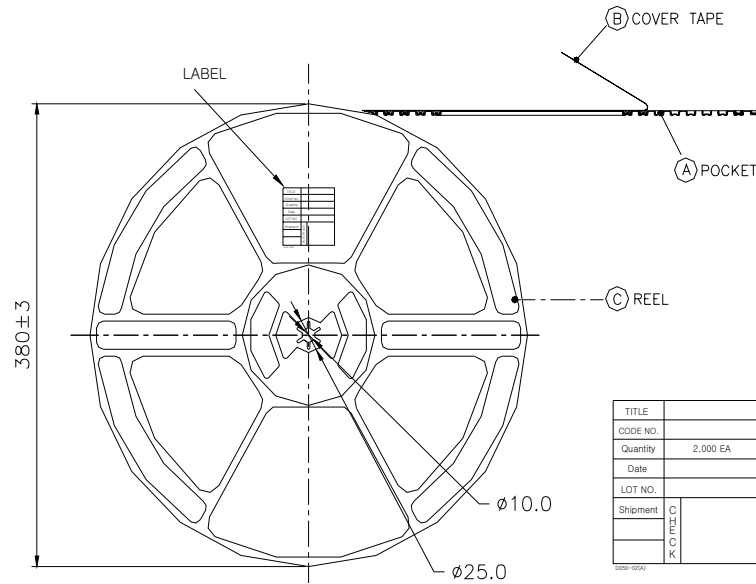

TITLE	
CODE NO.	
Quantity	2,000 EA
Date	
LOT NO.	
Shipment	
K O P E C O	

NAME	(A) POCKET	(B) COVER TAPE	(C) REEL
MATERIAL	PS	PET	HIPS

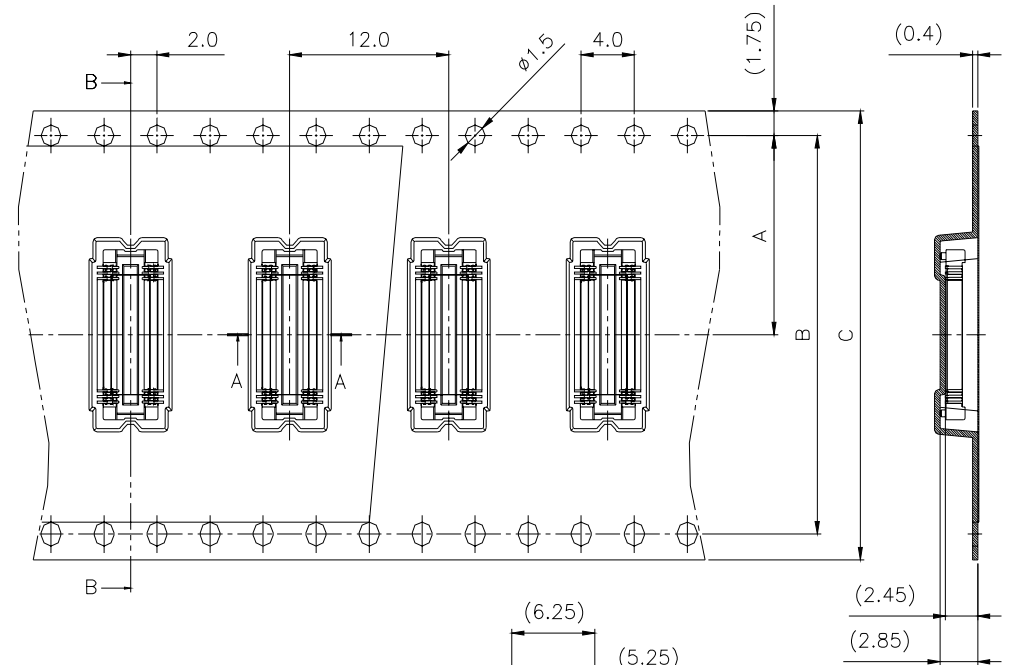

SECTION A-A(S=2/1)

SECTION B-B

PINS	POSITION	A	B	C	D
16		11.5	-	24	30.4
18		11.5	-	24	30.4
20		11.5	-	24	30.4
24		11.5	-	24	30.4
30		11.5	-	24	30.4
34		11.5	-	24	30.4
40		11.5	-	24	30.4
50		14.2	28.4	32	38.4
54		14.2	28.4	32	38.4
60		14.2	28.4	32	38.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

NP0420-S14PR-xxx-LF

SERIES

LEADFREE
016-060WAY

REEL

POST

UNMATED HIGH 1.4mm

FEMALE

DESCRIPTION: