

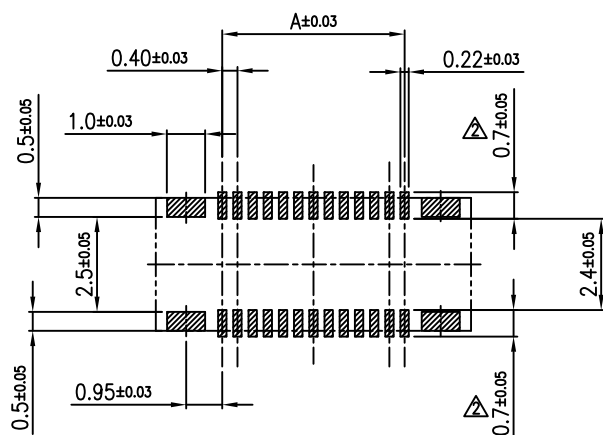
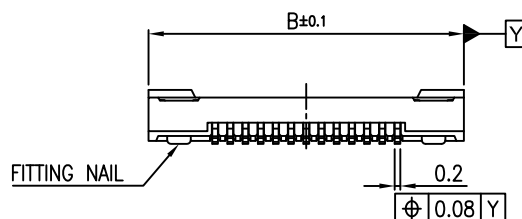
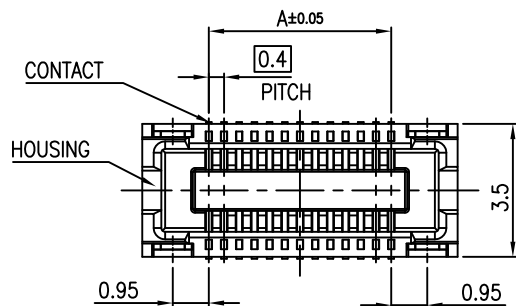




RECOMMENDED PC BOARD
PATTERN DIM.(REF.)



MATED CONDITION (REF.)

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC HIGH TEMP,
UL94V-0; COLOR:NATURAL.

1.2 CONTACT: COPPER ALLOY

1.3 FITTING NAIL:COPPER ALLOY

2. FINISH:

2.1 CONTACT:

UNDER PLATING: 50u" MIN. NICKEL OVERALL.
FINISH:SEE ORDER INFORMATION.

2.2 FITTING NAIL:

50u" MIN. NICKEL UNDER PLATING

100u" MIN. TIN PLATING ALLOVER

CKTS	Dim A	Dim B
20	3.60	7.10
22	4.00	7.50
24	4.40	7.90
25	4.80	8.30
30	5.60	9.10
40	7.60	11.10
50	9.60	13.10
60	11.60	15.10
70	13.60	17.10
80	15.60	19.10
100	19.60	23.10

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP0421-S14X-xxx-LF

SERIES

LEADFREE

020~160WAY

NON POST

UNMATED HIGH 1.4mm

FEMALE

DESCRIPTION: 0.4 PITCH BTB RECE. CONN. SMT S/T TYPE ASS'Y H=1.5

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com