
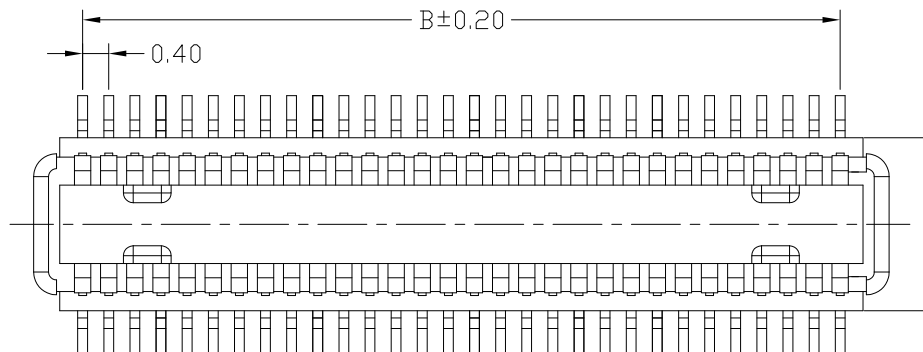
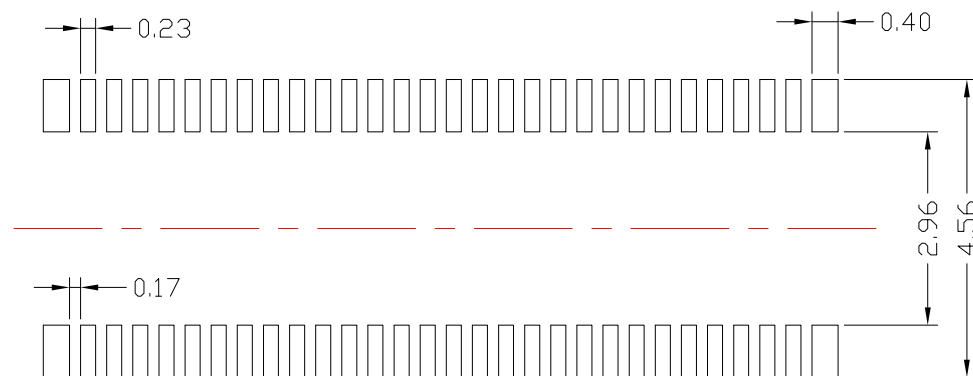


PIN NO	A	B
24	5.90	4.40
30	7.10	5.60
36	8.30	6.80
40	9.10	7.60
50	11.10	9.60
54	11.90	10.40
60	13.10	11.60
70	15.10	13.60

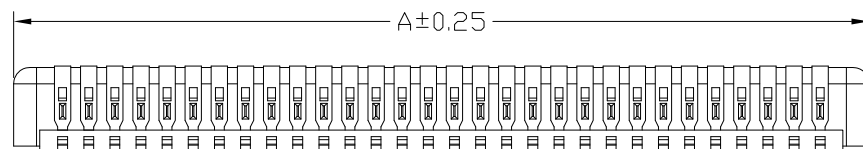

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M Ω MIN;
- 4.CONTACT RESISTANCE: 100m Ω MAX;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;

PLATING:

- 1.TERMINAL: GOLD PLATING,
NICKEL 50 μ " MIN. OVER ALL;

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

照片框

ORDER INFORMATION

NP0422-P01X-xxx-LF

SERIES

LEADFREE

024~070WAY

NON POST

UNMATED HIGH 1.0mm

MALE

DESCRIPTION: 0.4PH 1.5H BTB MALE