
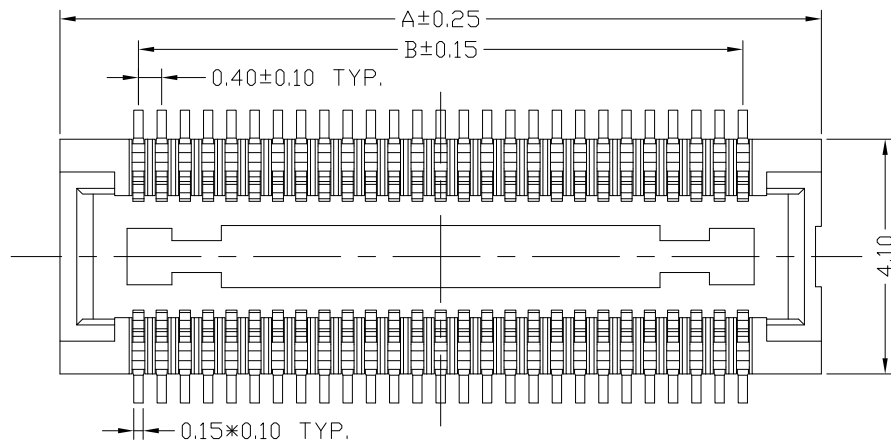
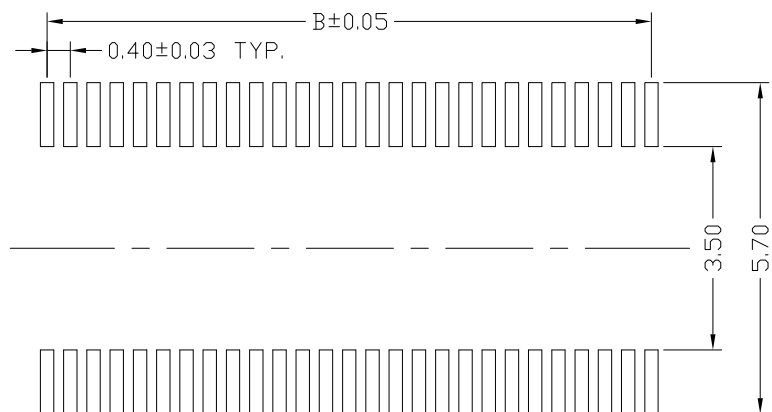


PIN NO.	DIM. A	DIM. B
20	6.30	3.60
24	7.10	4.40
30	8.30	5.60
40	10.30	7.60
54	13.10	10.40
60	14.30	11.60
70	16.30	13.60

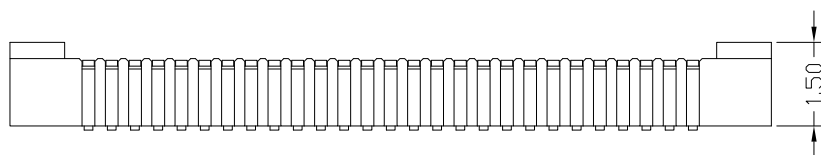

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M Ω MIN;
- 4.CONTACT RESISTANCE: 100m Ω MAX;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;

PLATING:

- 1.TERMINAL: GOLD PLATING,
NICKEL 50u" MIN. OVER ALL;

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

NP0422-S14X-xxx-LF

SERIES

LEADFREE

020~070WAY

NON POST

UNMATED HIGH 1.4mm

MALE

DESCRIPTION: 0.4PH 1.5H BTB FEMALE