
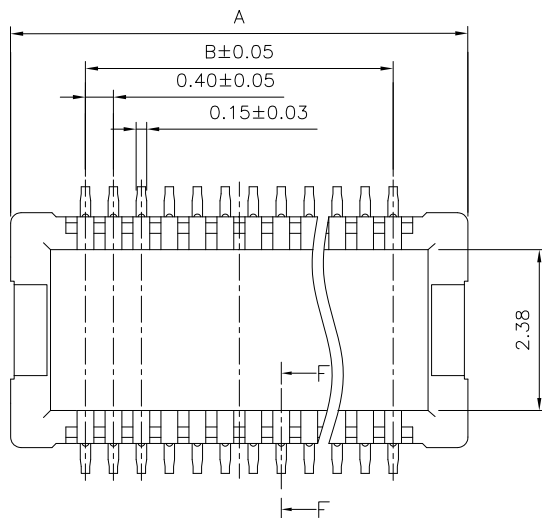
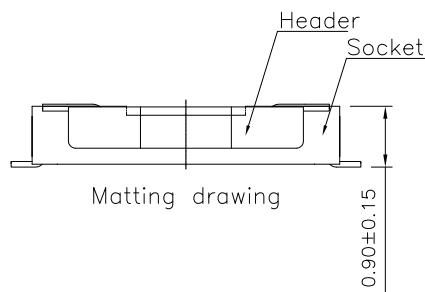


Specifications:


1. Current Rating : 0.3A AC/DC
2. Voltage Rating : 30V AC/DC
3. Contact Resistance : 80m ohm. max.
4. Insulation Resistance : 1000M ohm. min.at 250V DC
5. Withstanding Voltage :150V AC for one minute
6. Operating Temperature Range : -55°C to +85°C

Material and Plated

- 1.Housing : High Temp Plastic. (UL94V-0)
- 2.Contact : Copper Alloy
- 3.Plated : Gold Plated



Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
10	3.74	1.60	40	9.74	7.60
20	5.74	3.60	50	11.74	9.60
24	6.54	4.40	60	13.74	11.60
30	7.74	5.60	70	15.74	13.60

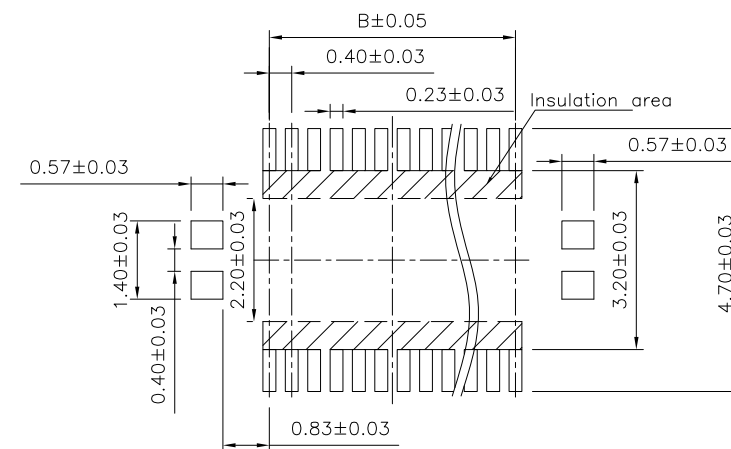

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP0433-P01XR-xxx-LF

SERIES

LEADFREE
010~070WAY



REEL

NON POST



UNMATED HIGH 0.1mm

MALE



DESCRIPTION: 0.4mm Board To Board Plug Matting Height 0.90mm

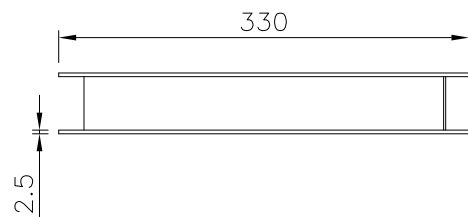

- Note:
- 1.All dimensions meet EIA-481-D requirements.
 - 2.Material: Transparent Conductive Polystyrene Alloy 100% recyclable.
 - 3.Thickness : $0.4 \pm 0.05\text{mm}$
 - 4.Component load per 13" reel reel :5000 pcs.
 - 5.Carton Size:
Carton Size:350*350*296(MM)

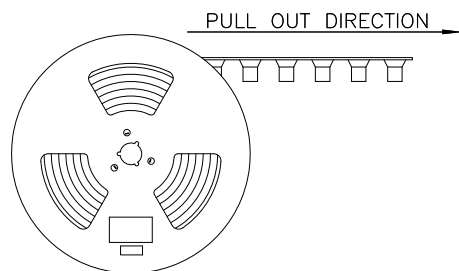

Pin No.	W	F	PCS/R	R/CTN	Q'TY
10	16	7.5	5000	12	60,000
20	16	7.5	5000	12	60,000
24	16	7.5	5000	12	60,000
30	16	7.5	5000	12	60,000
40	24	11.5	5000	9	45,000
50	24	11.5	5000	9	45,000
60	24	11.5	5000	9	45,000
70	24	11.5	5000	9	45,000

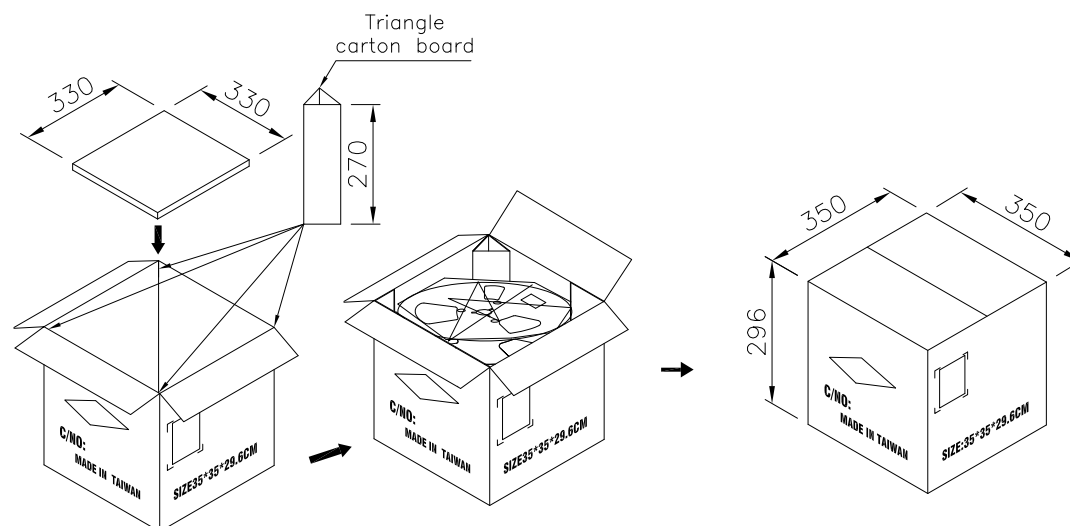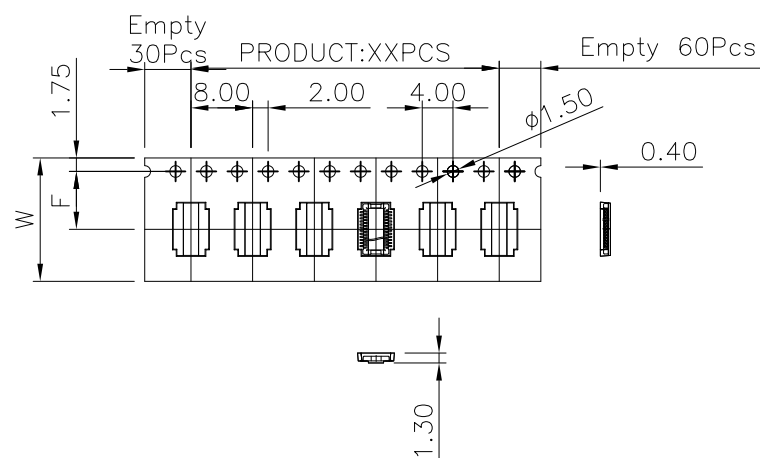

For Reel width (dimension W)16,24mm
Single row hole

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.15
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

NP0433-P01XR-xxx-LF

SERIES

LEADFREE
010~070WAY
REEL
NON POST
UNMATED HIGH 0.1mm
MALE

DESCRIPTION: 0.4mm Board To Board Plug Matting Height 0.90mm