





MATING PROCEDURE

Check the mating condition

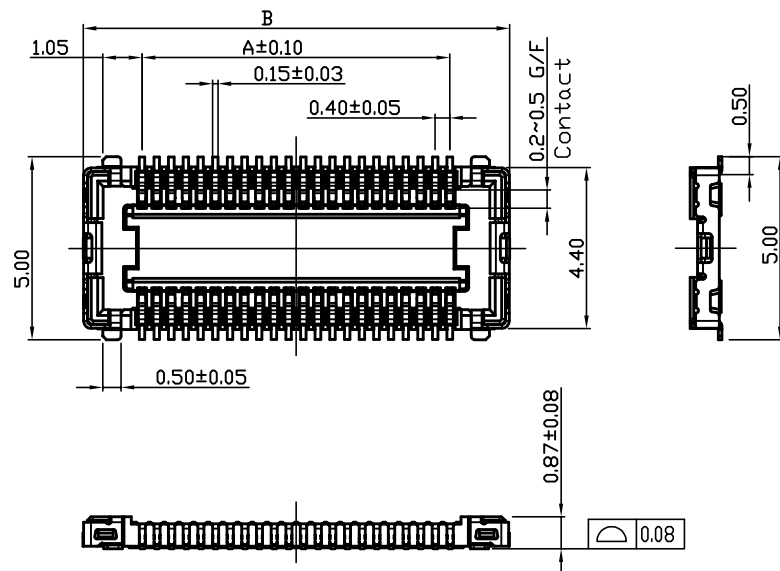

UNMATING PROCEDURE

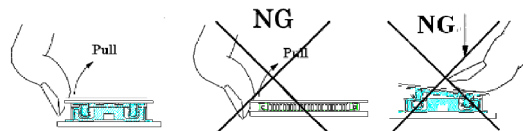

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0

1.2 CONTACT: COPPER ALLOY

1.3 FITTING NAIL: COPPER ALLOY

2. FINISH:

CONTACT

CONTACT: SEE ORDER INFORMATION.


SOLDER: GOLD FLASH (1u" Min.)

UNDERPLATING: 50~100u" NICKEL OVERALL.

FITTING NAIL: MATT TIN 100u"


UNDERPLATING: 50~100u" NICKEL OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C

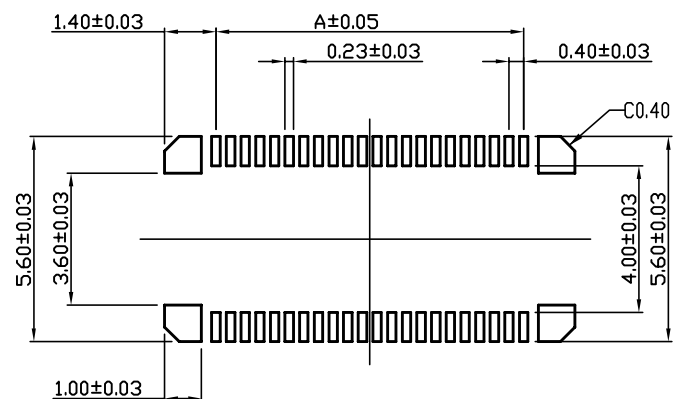

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

PIN	A	B
40	7.60	10.84
50	9.60	12.84
60	11.60	14.84
70	13.60	16.84
80	15.60	18.84

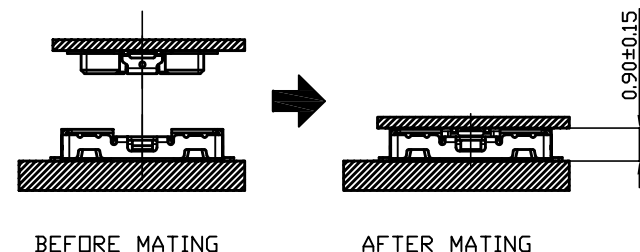

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG ± 2°

SIZE A4

PPOJECTION

ORDER INFORMATION

NP0433-S08XR-xxx-LF

SERIES

LEADFREE

040~080WAY

REEL

NON POST

UNMATED HIGH 0.8mm

FEMALE

DESCRIPTION: 0.4mm BOARD TO FPC H:0.9mm RCPT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES




煜倫股份有限公司

www.morethanall.com

	10PIN	24 PIN	30 PIN	40 PIN	44 PIN	50 PIN	60 PIN
W	16.00±0.30	16.00±0.30	24.00±0.30	24.00±0.30	24.00±0.30	24.00±0.30	24.00±0.30
W1	7.50±0.10	7.50±0.10	11.50±0.10	11.50±0.10	11.50±0.10	11.50±0.10	11.50±0.10
B0	4.07±0.10	6.87±0.10	8.07±0.10	10.07±0.10	10.87±0.10	12.07±0.10	14.07±0.10
B1	5.10±0.10	7.90±0.10	9.10±0.10	11.10±0.10	11.90±0.10	13.10±0.10	15.10±0.10

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE.±0.20mm
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: 0.3 ± 0.05 mm.
6. PACKING LENGTH PER 13" REEL : 37 METERS.
7. COMPONENT LOAD PER 13" REEL : 4500 PCS.

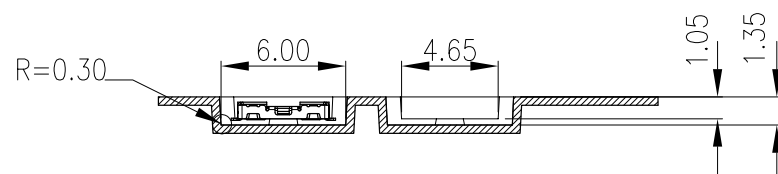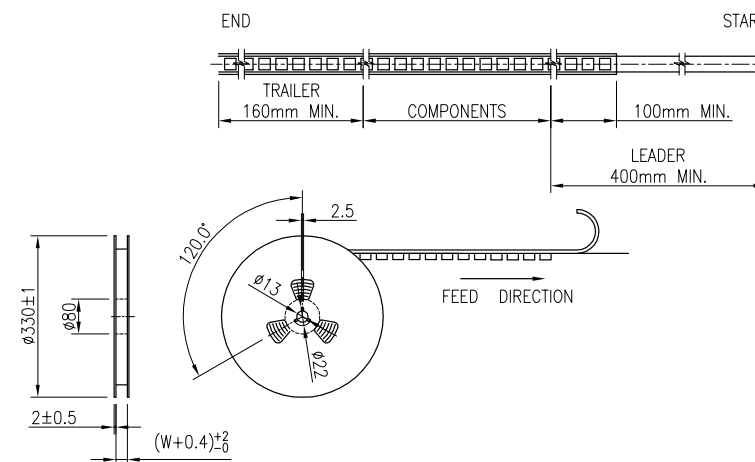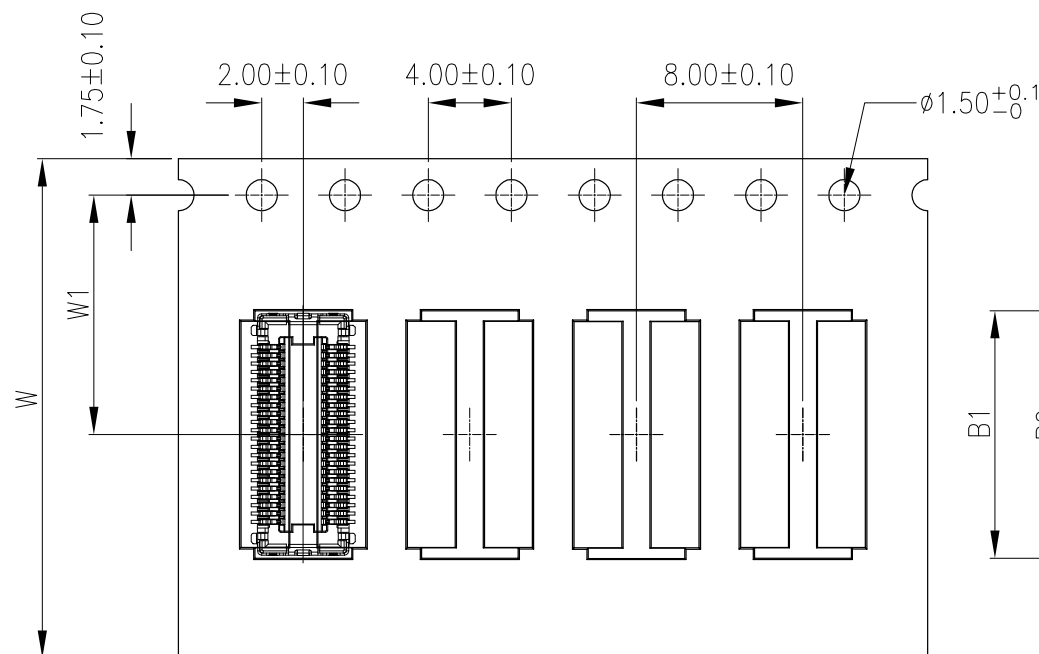

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

NP0433-S08XR-xxx-LF



SERIES

LEADFREE
040-080WAY
REEL
NON POST
UNMATED HIGH 0.8mm
FEMALE

DESCRIPTION: PACKING

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE. $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.3 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 43 METERS.
7. COMPONENT LOAD PER 13" REEL : 3500 PCS.

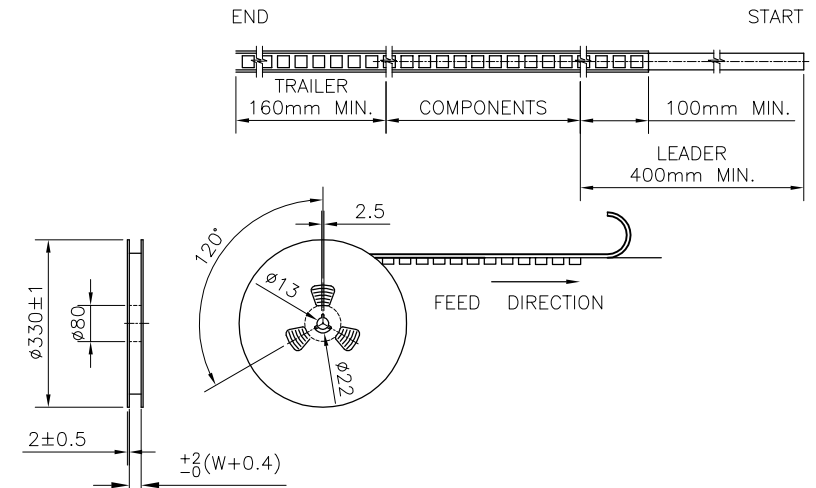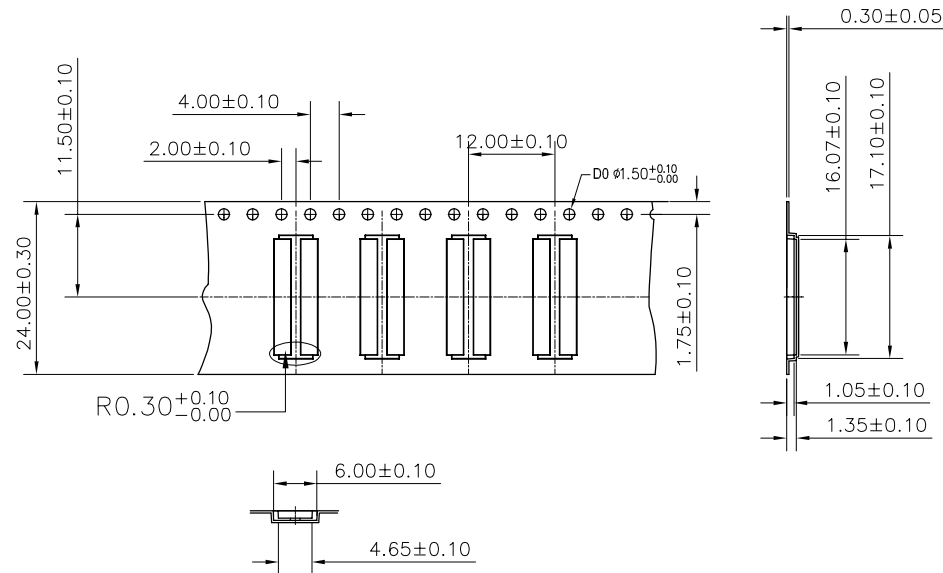

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG $\pm 2^\circ$

照片框

ORDER INFORMATION

NP0433-S08XR-xxx-LF

SERIES

LEADFREE

040~080WAY

REEL

NON POST

UNMATED HIGH 0.8mm



FEMALE

DESCRIPTION: PACKING

	80 PIN
W	32.00±0.30
B0	18.07±0.10
B1	19.10±0.10

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE.±0.20mm
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: 0.3 ± 0.05 mm.
6. PACKING LENGTH PER 13" REEL : 37 METERS.
7. COMPONENT LOAD PER 13" REEL : 4500 PCS.

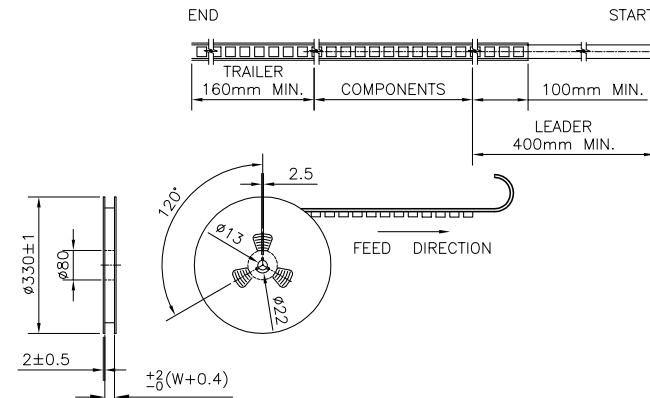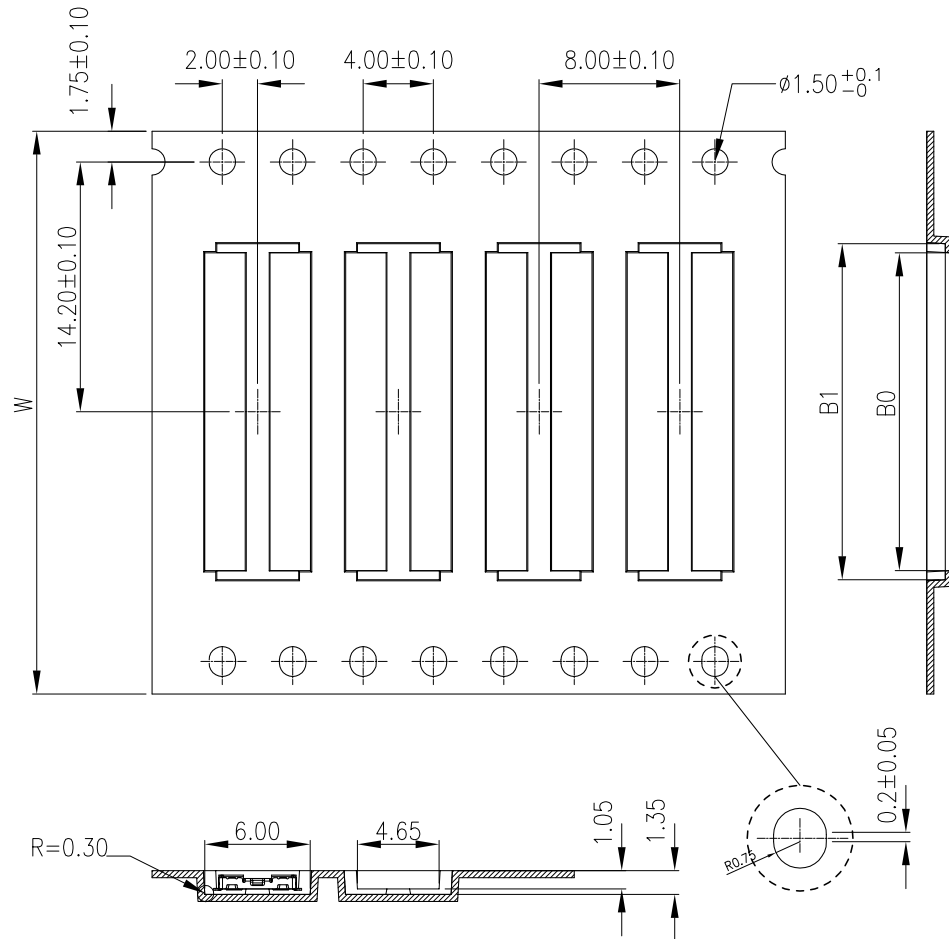

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

NP0433-S08XR-xxx-LF

SERIES

REEL

NON POST


UNMATED HIGH 0.8mm

FEMALE

LEADFREE

040~080WAY

DESCRIPTION: PACKING

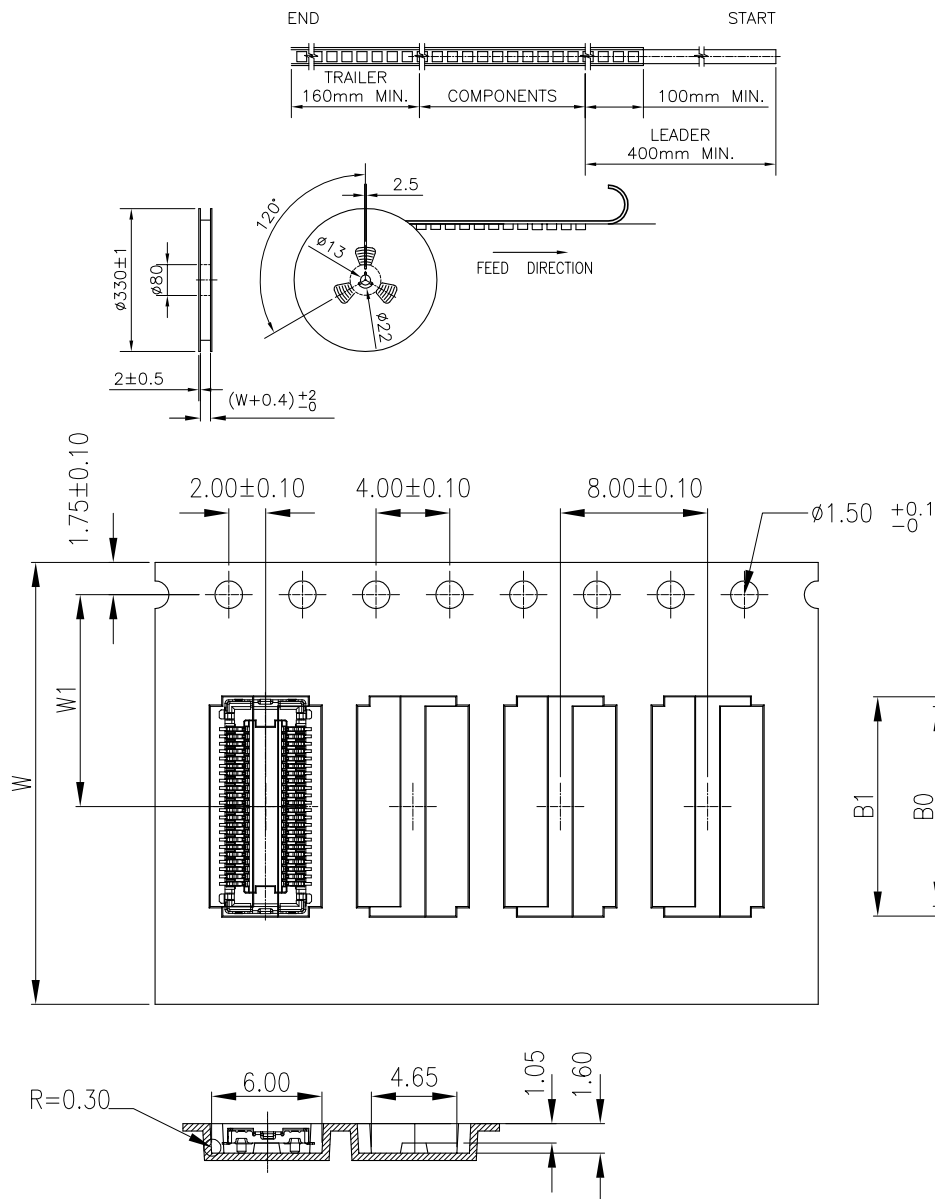

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE: $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.3 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL : 33METERS.
7. COMPONENT LOAD PER 13" REEL : 4000 PCS.

	60 PIN
W	24.00 ± 0.30
W1	11.50 ± 0.10
B0	14.07 ± 0.10
B1	15.10 ± 0.10

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG $\pm 2^\circ$

ORDER INFORMATION

NP0433-S08XR-xxx-LF

SERIES

REEL

NON POST

UNMATED HIGH 0.8mm

FEMALE

LEADFREE
040~080WAY

DESCRIPTION: PACKING