


NOTES:

1. MATERIAL:
 - 1.1 HOUSING: HALOGEN FREE PLASTICS, UL94V-0; COLOR:NATURE.
 - 1.2 CONTACT: COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT:
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
 - 1:GOLD FLASH(1~3u") SOLDER AREA
 - 2:3.5U"MIN GOLD OVERALL
 - 2.2 SOLDER
 - GOLD FLASH(1~3u") CONTACT AREA
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C
4. PACKAGE PLS. REFER TO PART NUMBER

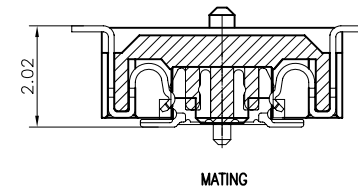

CKT	DIM A	DIM B	DIM C	DIM D
12	2.50	4.00	6.00	4.65
14	3.00	4.50	6.50	5.15
50	12.00	13.50	15.50	14.15

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°

DATE

SIZE A4

PJECTION

照片框

ORDER INFORMATION

NP0516-S18PC-xxx-LF

SERIES

LEADFREE
012.014.050 WAY
MYLAR
POST
UNMATED HIGH/ 1.8mm
FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.5mm PITCH BTB RCPT CONN SMT D/R S/T MATED H=2.0mm