

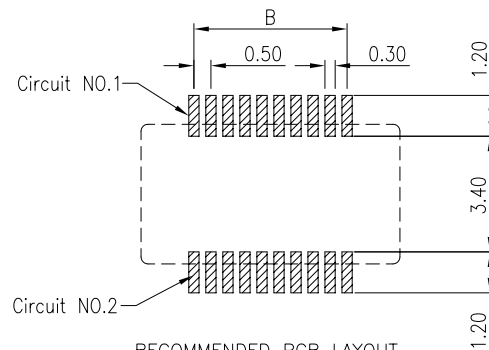


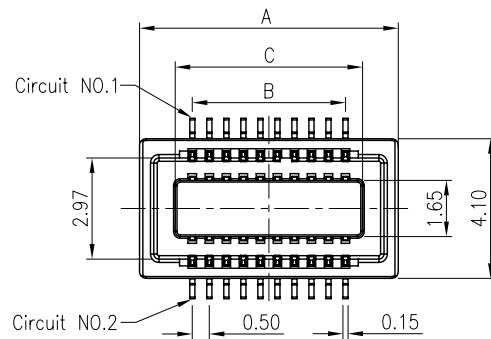




RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

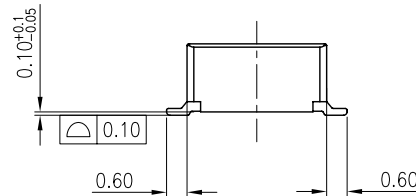

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR IS BLACK.
 - 1.2 CONTACT: COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT: GOLD FLASH OVER ALL 50 μ " MIN. NICKEL UNDERPLATING OVERALL.
3. IR REFLOW CAPABLE TO 260°C
4. "*" IS AVAILABLE FOR MASS-PRODUCTION

*

CKT	DIM A	DIM B	DIM C
20	7.6	4.5	5.5
30	10.1	7.0	8.0
40	12.6	9.5	10.5
50	15.1	12.0	13.0
60	17.6	14.5	15.5
70	20.1	17.0	18.0
80	22.6	19.5	20.5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

NP0517M-S20XCR-xxx-LF

SERIES

FEMALE

REEL

CAP

NON POST


LEADFREE

020~080 WAY

UNMATED HIGH 2.1mm


DESCRIPTION: 0.5mm B-T-B CONNECTOR RCPT D/R S/T SMT TYPE

CKT.	A	B	C	D	E
20	16.00	7.50	7.90	5.50	16.40
40	24.00	11.50	12.90	10.50	24.40

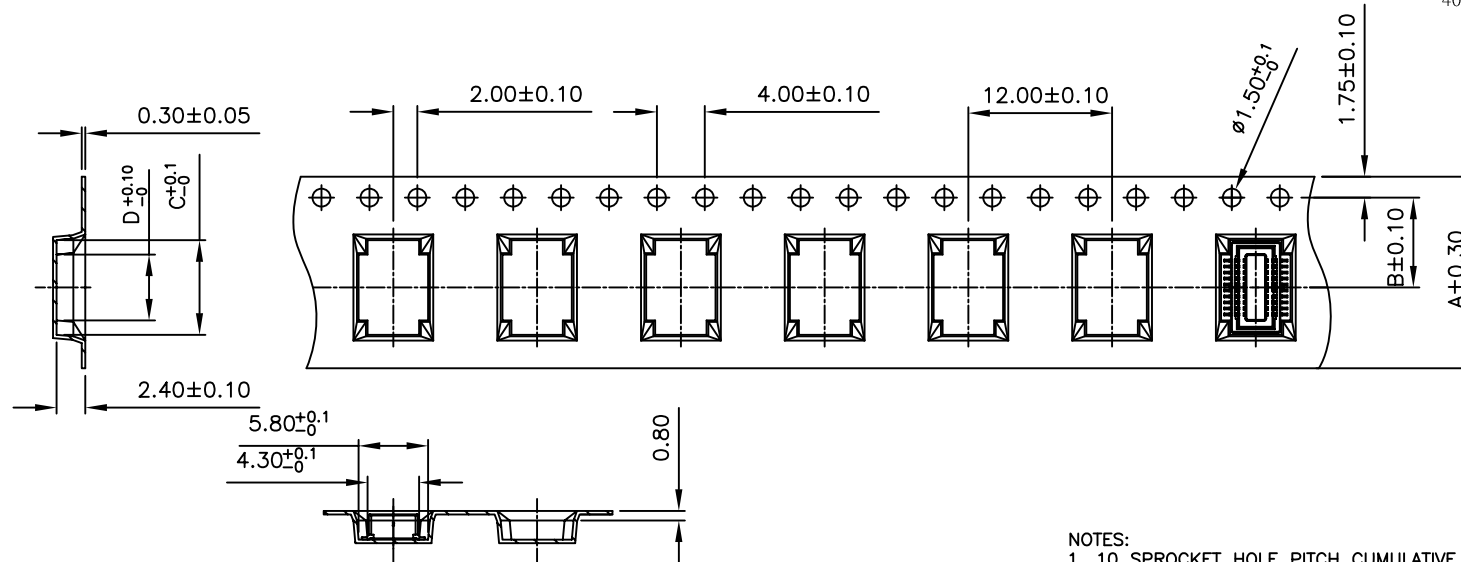

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.3 \pm 0.05 \text{ mm}$.
6. COMPONENT LOAD PER 13" REEL : 2000 PCS.

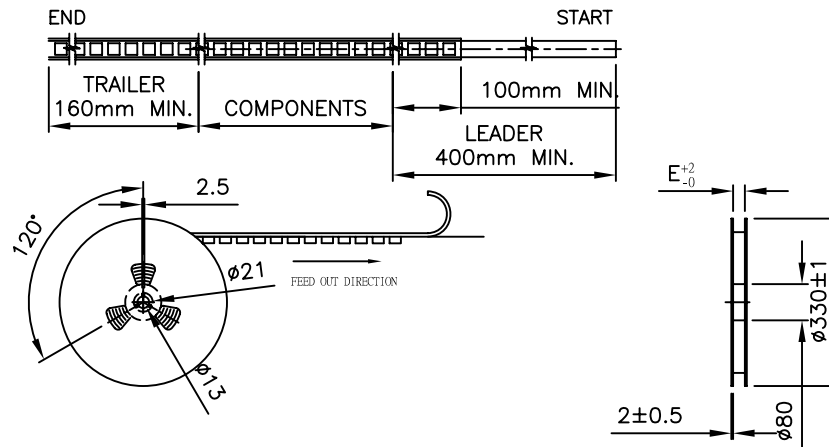

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

NP0517M-S20XCR-xxx-LF

SERIES

LEADFREE

020~080 WAY

REEL


CAP

NON POST

UNMATED HIGH 2.1mm

DESCRIPTION: EMBOSSED TAPE PACKING

CKT.	A	B	C	D	E
60	32.00	14.20	17.90	15.50	32.40

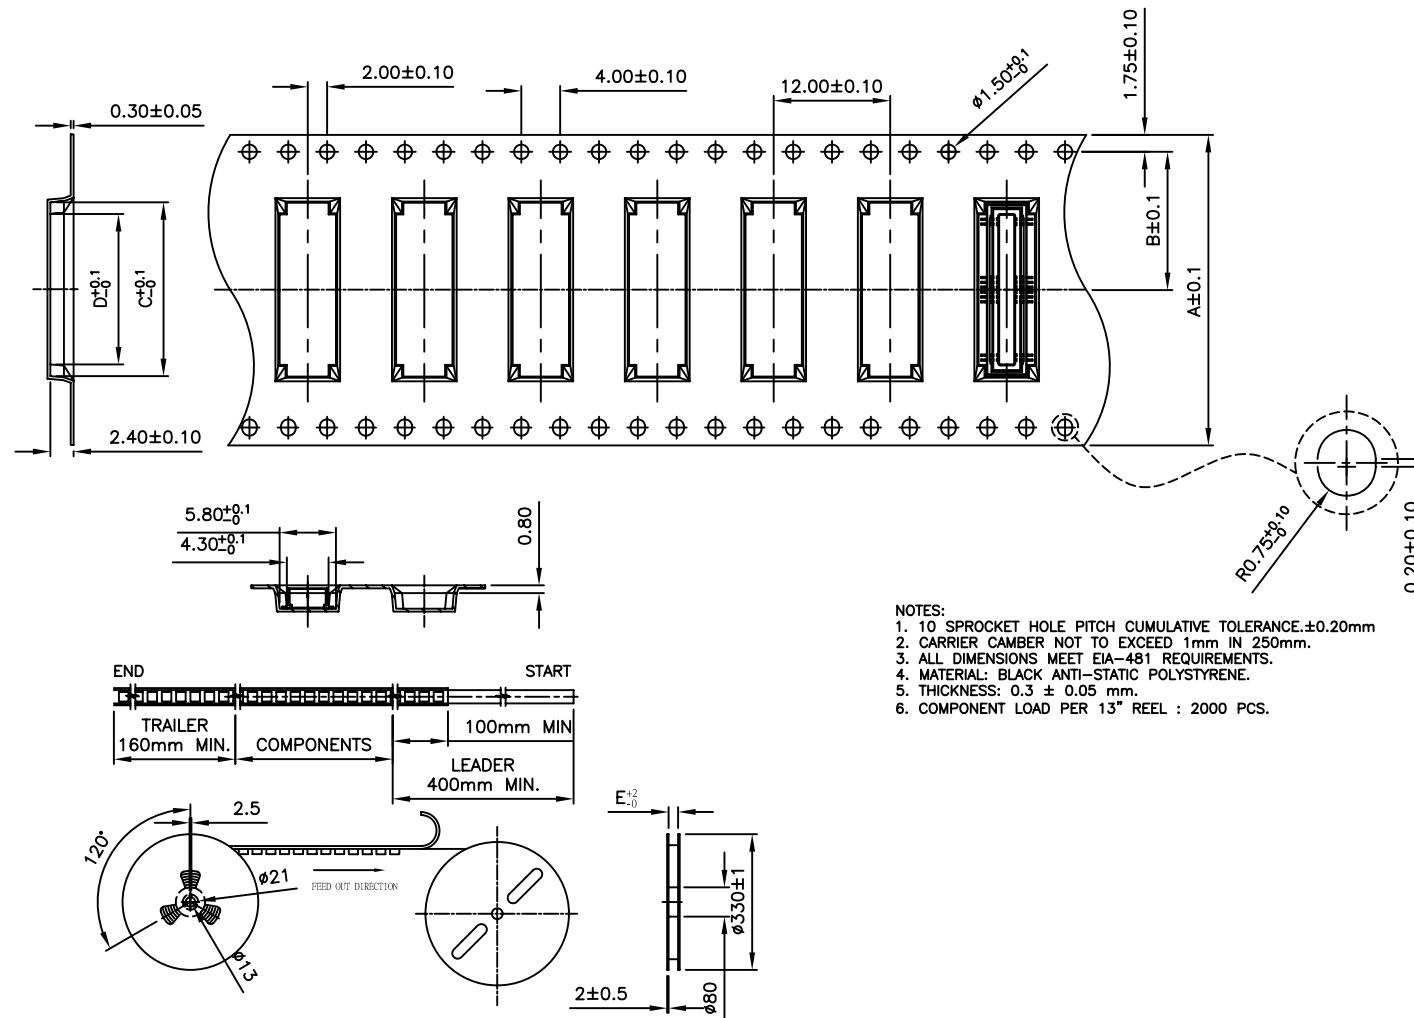

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

NP0517M-S20XCR-xxx-LF

SERIES
LEADFREE
020~080 WAY
REEL
CAP
FEMALE
NON POST
UNMATED HIGH 2.1mm

DESCRIPTION: EMBOSSED TAPE PACKING

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG $\pm$

SIZE A4

PPOJECTION