


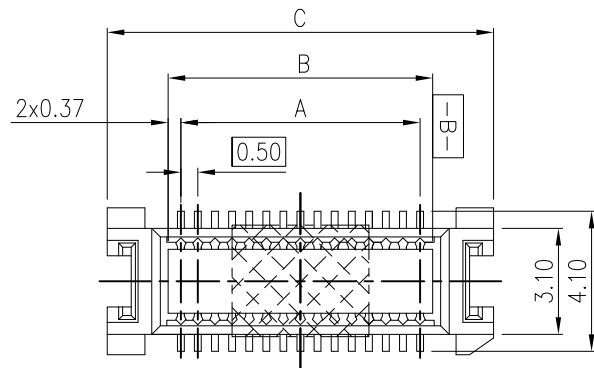





#### Notes:

##### 1. Material:

Housing is High Temperature Thermoplastic,color is Natural.  
Terminal is Brass thickness is 0.15 mm

##### 2. Plating:

Gold Flash Over All  
50u" Min Nickel under plating

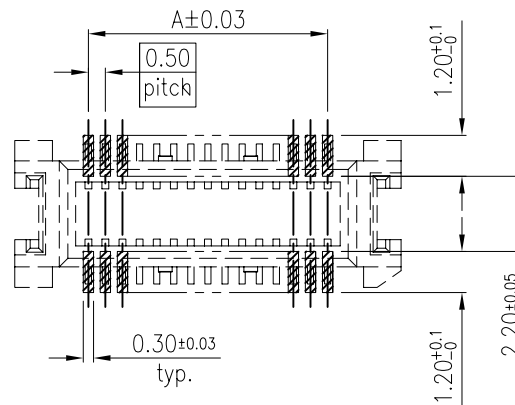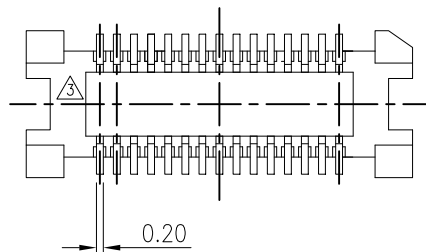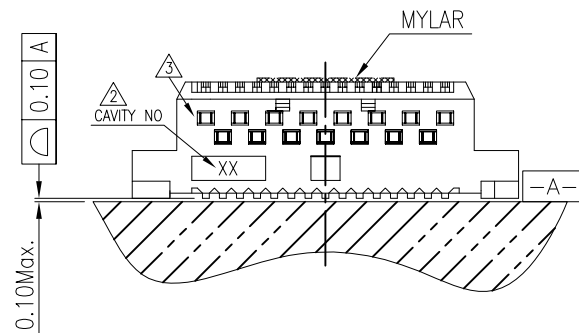

RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE ±0.05

| P/N              | Ckts | Dim A | Dim B | Dim C |
|------------------|------|-------|-------|-------|
| NP0518-P17XC-020 | 20   | 4.50  | 5.24  | 8.80  |
| NP0518-P17XC-030 | 30   | 7.00  | 7.74  | 11.30 |
| NP0518-P17XC-040 | 40   | 9.50  | 10.24 | 13.80 |
| NP0518-P17XC-050 | 50   | 12.00 | 12.74 | 16.30 |
| NP0518-P17XC-060 | 60   | 14.50 | 15.24 | 18.80 |
| NP0518-P17XC-070 | 70   | 17.00 | 17.74 | 21.30 |
| NP0518-P17XC-080 | 80   | 19.50 | 20.24 | 23.80 |

#### RoHS Compliant

#### TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

#### ORDER INFORMATION

NP0518-P17XC-xxx-LF

SERIES

LEADFREE

020~080WAY

MYLAR

NON POST

UNMATED HIGH/ 1.7mm

MALE

DESCRIPTION: 0.5 mm BTB SMT D/R Plug Type (insert molding)