

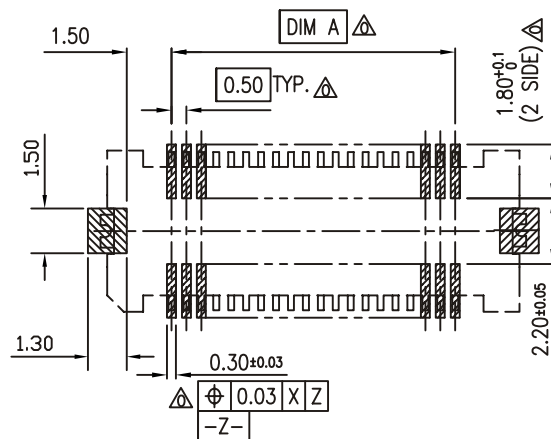
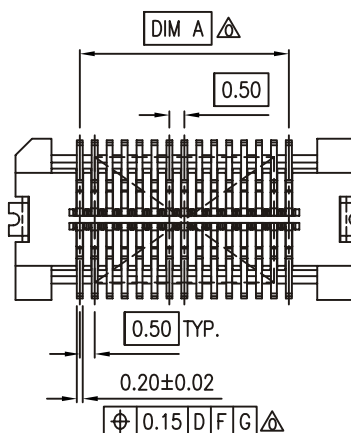
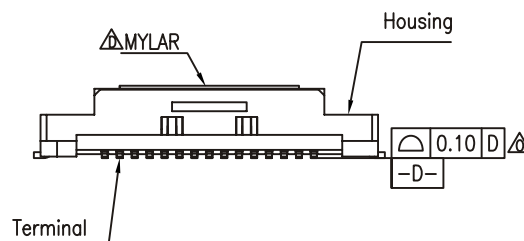


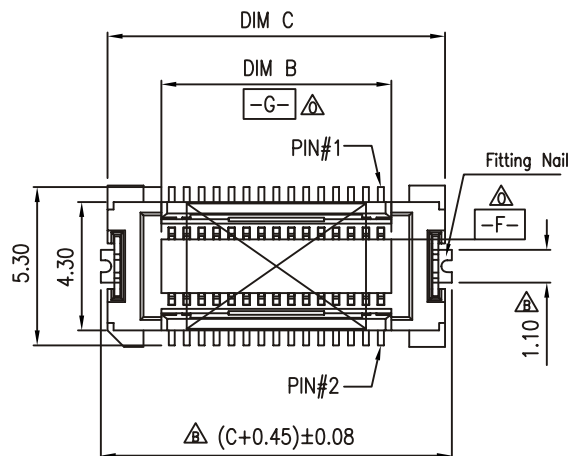

RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE  $\pm 0.05$   
(WITH FITTING NAIL WITHOUT BOSS)



Notes:

1. Material:

Housing is high temperature plastic  
color is nature ,UL94 V-0  
Terminal is copper alloy thickness is 0.15 mm

2. Plating:

1.27  $\mu$ m min. Nickel over all  
Gold Flash all over

3. Datum X is the top surface of PCB

| Ckts | Dim A | Dim B | Dim C | Mylar P/N |
|------|-------|-------|-------|-----------|
| 20   | 4.50  | 5.20  | 8.80  | NA        |
| 30   | 7.00  | 7.70  | 11.30 | W6T12     |
| 40   | 9.50  | 10.20 | 13.80 | NA        |
| 50   | 12.00 | 12.70 | 16.30 | NA        |
| 60   | 14.50 | 15.20 | 18.80 | NA        |
| 70   | 17.00 | 17.70 | 21.30 | NA        |
| 80   | 19.50 | 20.20 | 23.80 | NA        |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X,  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$

照片框

ORDER INFORMATION

NP0518-S23ECR-xxx-LF

SERIES

MALE

NON POST

REEL

MYLAR

UNMATED HIGH/ 2.3mm

LEADFREE

020-080WAY

DESCRIPTION:



