

Notes:


1. Material:

Housing is high temperature plastic
color is nature ,UL94 V-0
Terminal is copper alloy thickness is 0.15 mm



2. Plating:

50u" min. Nickel over all
Gold Flash all over

3. Datum X is the top surface of PCB

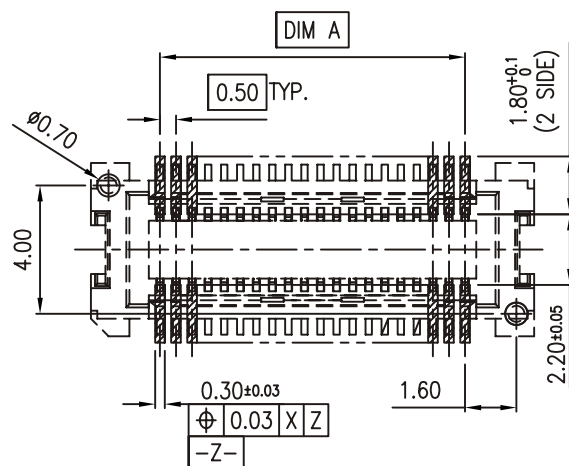

RECOMMEND P.C.B LAYOUT
(WITH BOSS WITHOUT FITTING NAIL) △

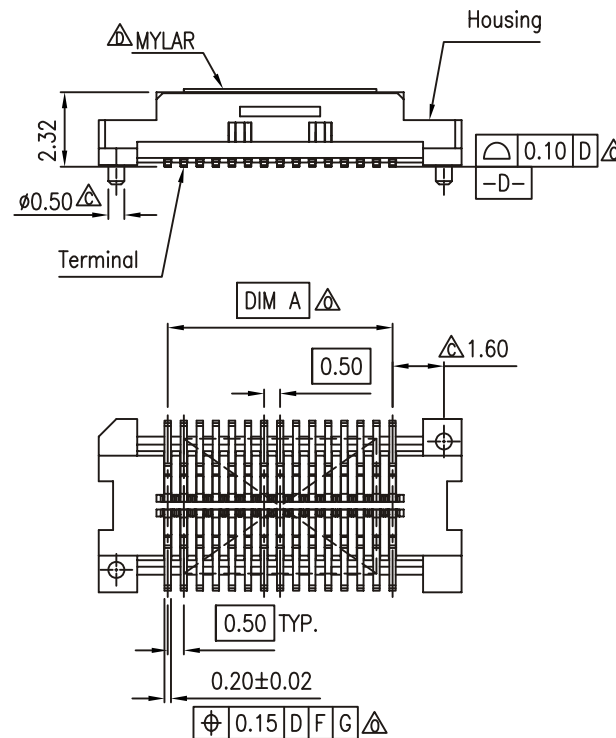

Ckts	Dim A	Dim B	Dim C	Mylar P/N
20	4.50	5.20	8.80	NA
30	7.00	7.70	11.30	W6T12
40	9.50	10.20	13.80	NA
50	12.00	12.70	16.30	NA
60	14.50	15.20	18.80	NA
70	17.00	17.70	21.30	NA
80	19.50	20.20	23.80	NA

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

NP0518-S23PCR-xxx-LF

SERIES

LEADFREE

REEL

MYLAR

POST

UNMATED HIGH/ 2.3mm


FEMALE

POST

UNMATED HIGH/ 2.3mm

DESCRIPTION: 0.5 mm BTB SMT D/R Rcpt Type

CKT.	A±0.10	B±0.10	C±0.30	D
50	14.20	16.60	32.00	32.40
60		19.10		
70		21.60		
80	20.20	24.10	44.00	44.40

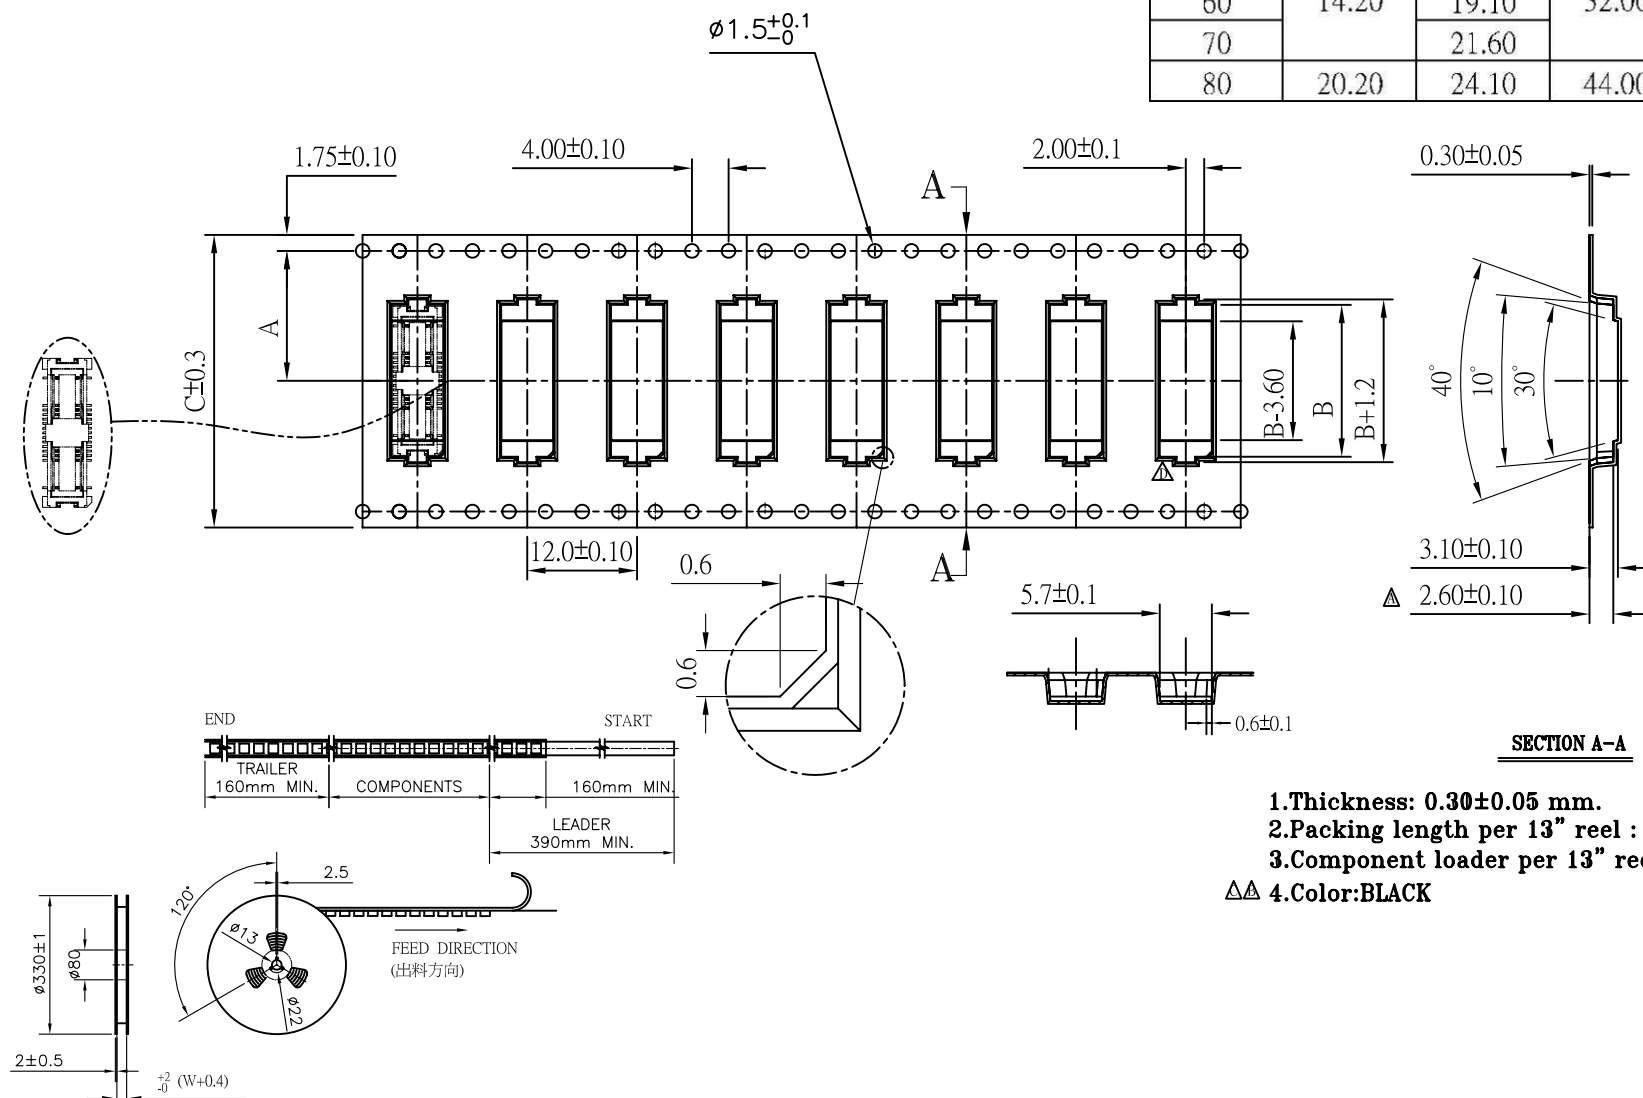

- 1.Thickness: 0.30 ± 0.05 mm.
- 2.Packing length per 13" reel : 19 Meters.
- 3.Component loader per 13" reel : 1500 pcs.
- 4.Color:BLACK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG±

PPOJECTION

照片框

ORDER INFORMATION

NP0518-S23PCR-xxx-LF

SERIES

LEADFREE

REEL

MYLAR

POST

UNMATED HIGH/ 2.3mm

020-080WAY

FEMALE

DESCRIPTION:0.5 mm BTB SMT D/R Rcpt Type