






Notes:

1. Material:

Housing is high temperature plastic
color is nature ,UL94 V-0
Terminal is copper alloy thickness is 0.15 mm

2. Plating:

1.27 um min. Nickel over all
Gold Flash all over

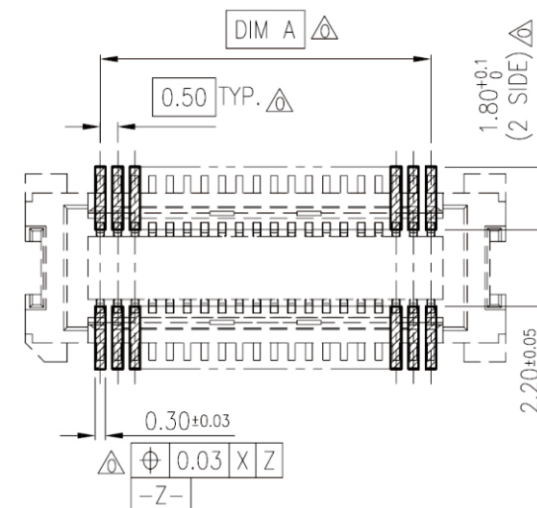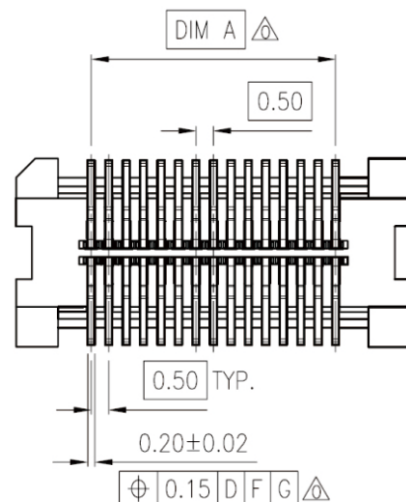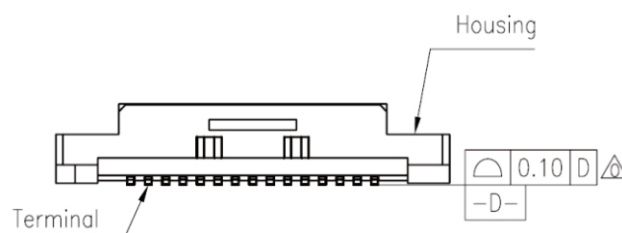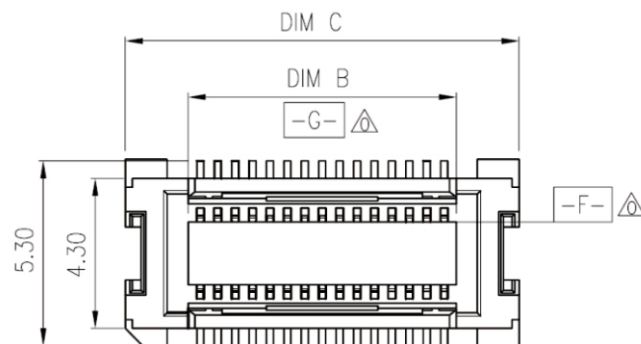

RECOMMEND P.C.B LAYOUT

P/N	Ckts	Dim A	Dim B	Dim C
NP0518-S23X-020	20	4.50	5.20	8.80
NP0518-S23X-030	30	7.00	7.70	11.30
NP0518-S23X-040	40	9.50	10.20	13.80
NP0518-S23X-050	50	12.00	12.70	16.30
NP0518-S23X-060	60	14.50	15.20	18.80
NP0518-S23X-070	70	17.00	17.70	21.30
NP0518-S23X-080	80	19.50	20.20	23.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

NP0518-S23X-xxx-LF

SERIES

LEADFREE

020-080WAY

NON POST

UNMATED HIGH 2.3mm

FEMALE

DESCRIPTION: