

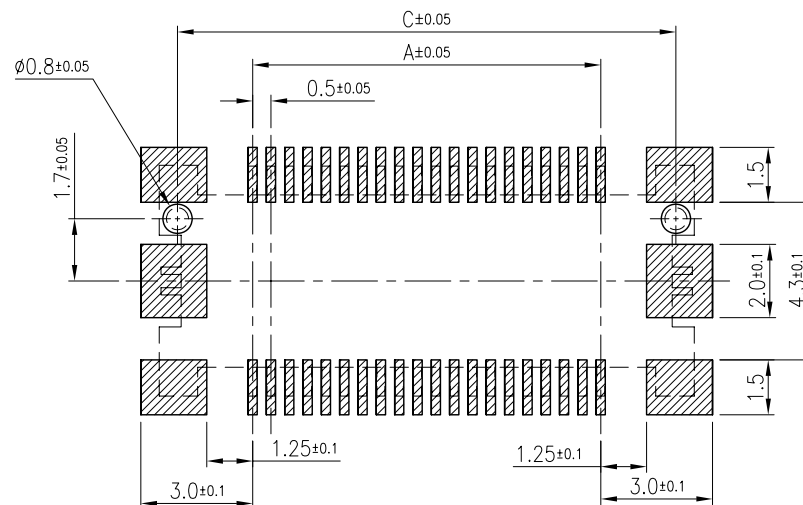
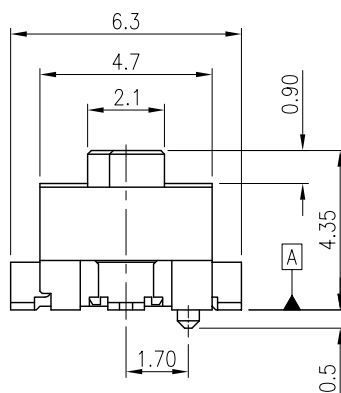
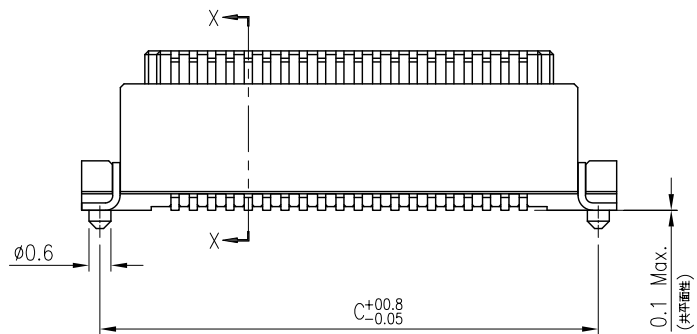


NOTES:

1. MATERIAL:
HOUSING:HIGH TEMP THERMO PLASTIC
TERMINAL:COPPER ALLOY
FITTING NAIL:COPPER ALLOY
2. PLATING:SEE P/N LEGEND.
3. COPLANARITY 0.1 MM MAX. BASE ON DATUM A
4. TRUE POSITION 0.1 MM MAX. BASE ON DATUM B

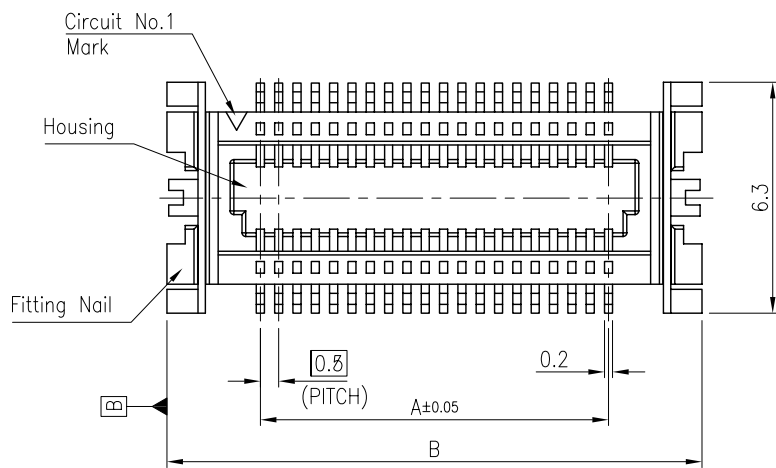

PCB PATTERN LAYOUT

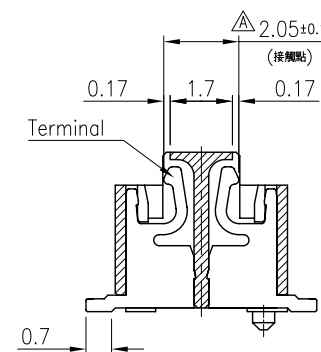

SEC. X-X

CKT	Dim A	Dim B	Dim C
10	2.0	7.1	6.1
12	2.5	7.6	6.6
14	3.0	8.1	7.1
16	3.5	8.6	7.6
20	4.5	9.6	8.6
24	5.5	10.6	9.6
26	6.0	11.1	10.1
30	7.0	12.1	11.1
34	8.0	13.1	12.1
40	9.5	14.6	13.6
50	12.0	17.1	16.1
60	14.5	19.6	18.6
80	19.5	24.6	23.6
100	24.5	29.6	28.6
120	29.5	34.6	33.6
160	39.5	44.6	43.6

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG ±

照片框

ORDER INFORMATION

NP0518F-S35PC-xxx-LF

SERIES

LEADFREE

010~160WAY

MYLAR

POST

UNMATED HIGH/ 3.5mm

FEMALE

DESCRIPTION: 0.5mm BTB D/R CONN. SMT S/T TYPE