

Notes:



* Inulator:

High temperature Polyamide UL 94V-0

Color Nature(Beige)

* Contact: Copper alloy

* For Lead-Free IR Reflow process

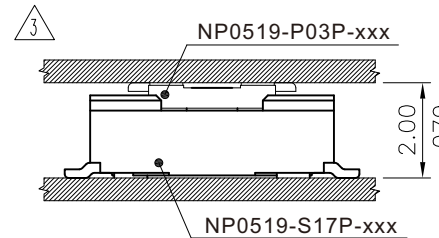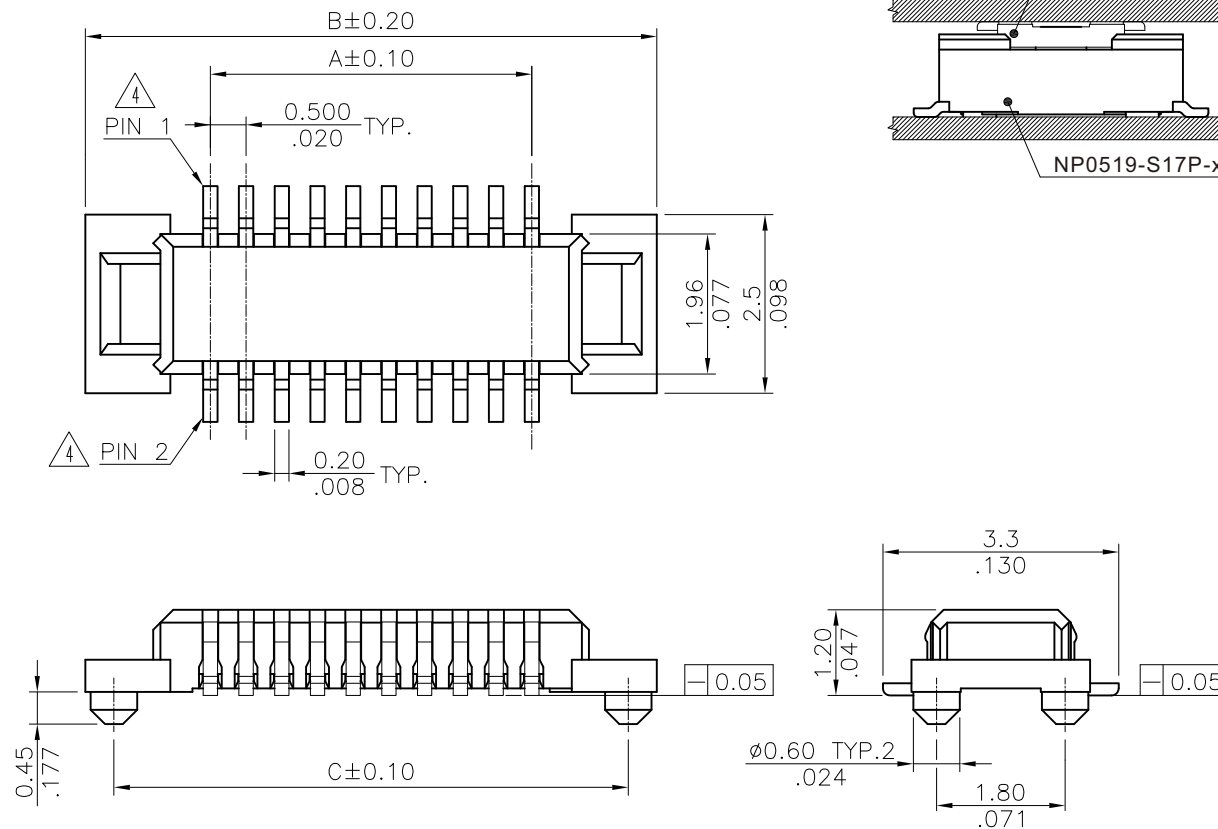


$$A = 0.50 * \text{No. of Spaces}$$

$$B = A + 3.5$$

$$C = A + 2.7$$

*(Available : 10,12,16,20,22)

4 Circuits not found above
 please consult manufacturer

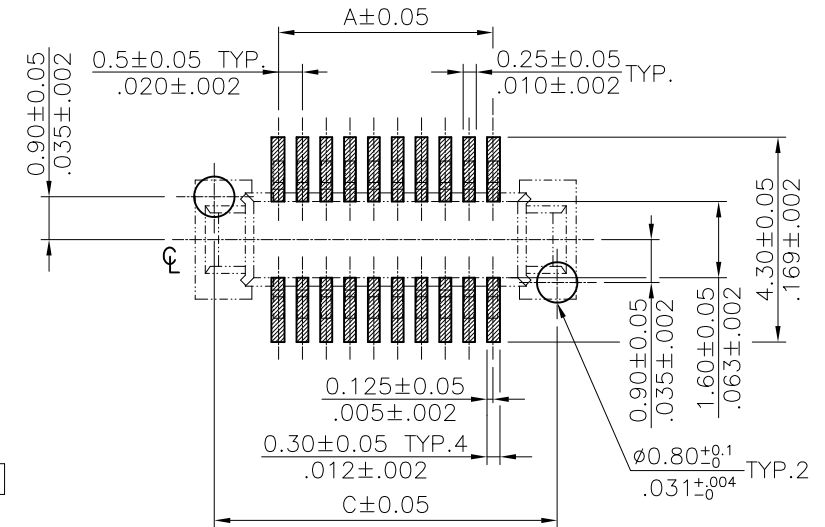

Recommended P.C. Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP0519-P03P-xxx-LF

SERIES

LEADFREE

010-022 WAY

POST

UNMATED HIGH 0.3mm

MALE

DESCRIPTION: