


Notes:

- * Insulator:
High temperature Polyamide UL 94V-0
Color Nature(Beige)
- * Contact: Copper alloy
- * For Lead-Free IR Reflow process

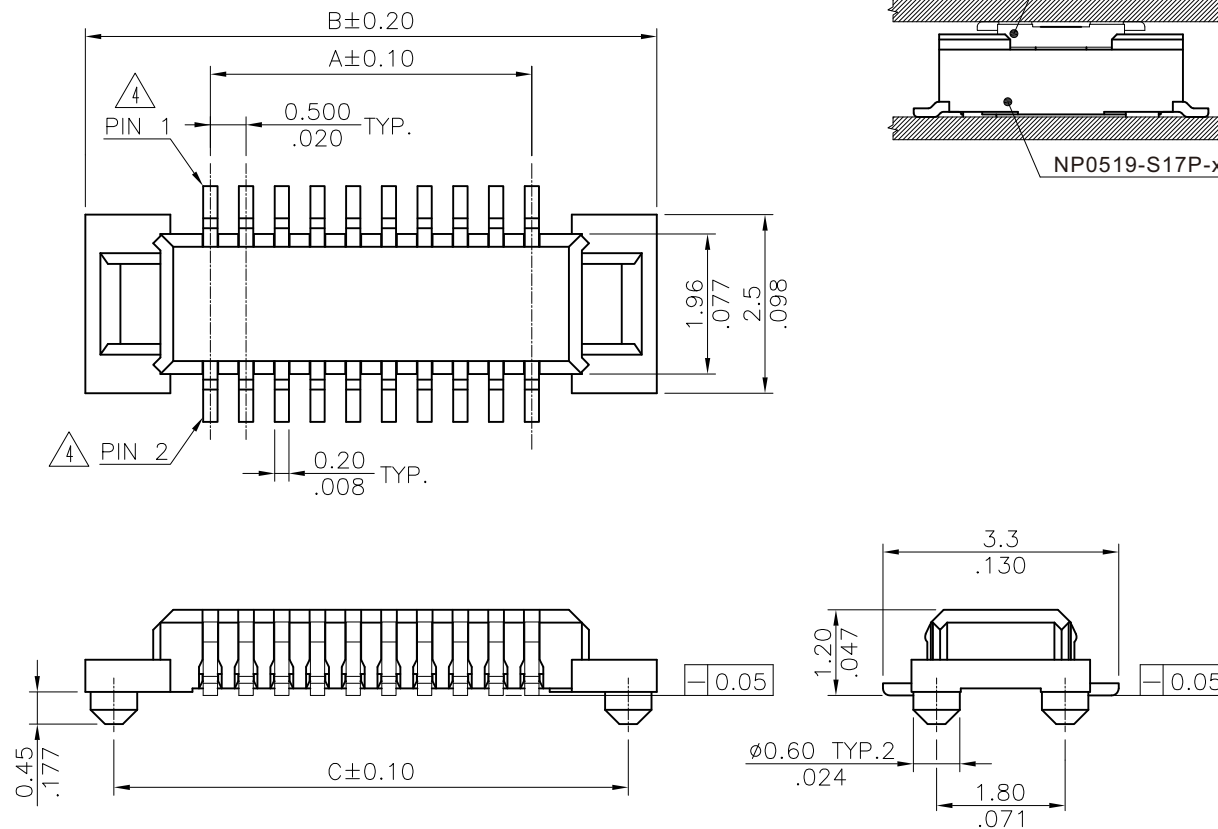


$$A = 0.50 * \text{No. of Spaces}$$

$$B = A + 3.5$$

$$C = A + 2.7$$

*(Available : 10,12,16,20,22)

△ Circuits not found above
please consult manufacturer

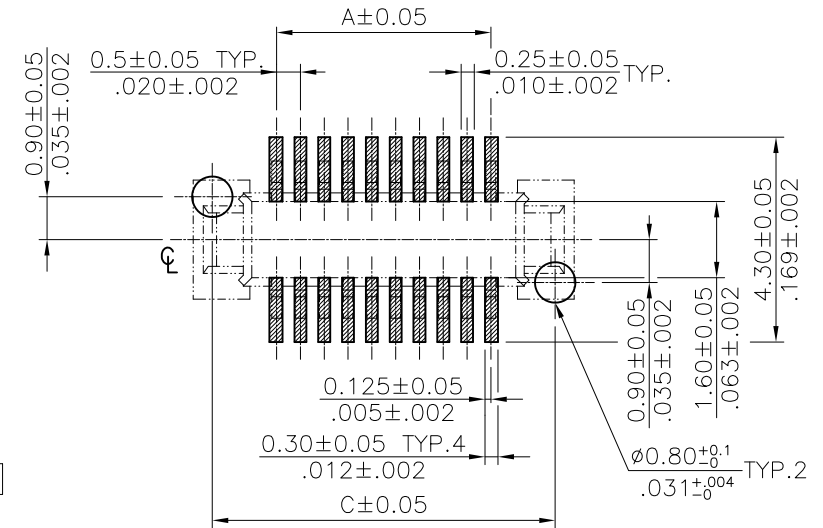

Recommended P.C. Board Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP0519-P03PR-xxx-LF

SERIES


LEADFREE

010-022 WAY

REEL

UNMATED HIGH 0.3mm



DESCRIPTION:

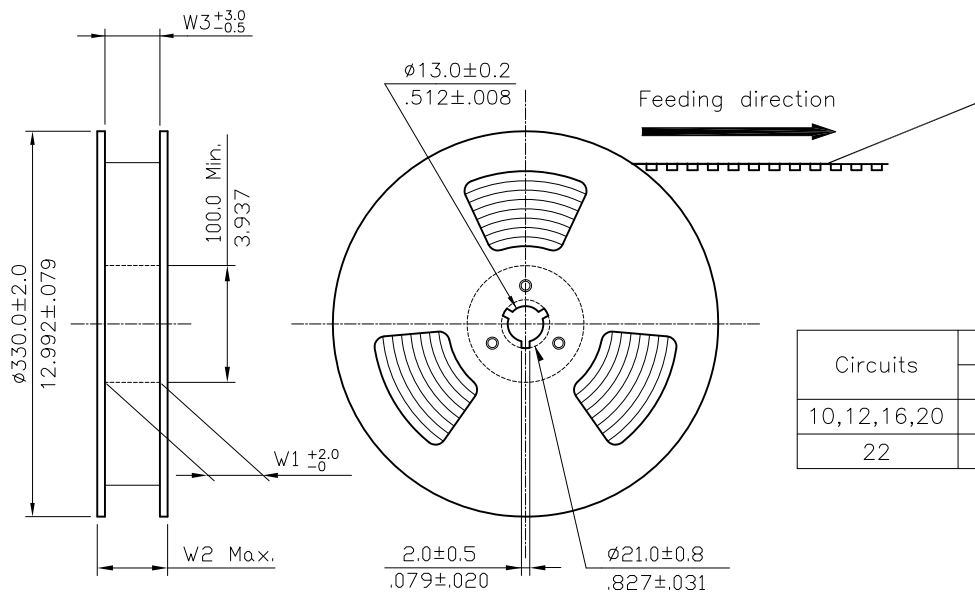

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Clear,Transparent Polystyrene Alloy (UP-6000).
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Packing length per 22" reel : 67 Meters.
7. Component load per 13" reel : 2000 pcs.

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
10,12,16,20	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
22	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9

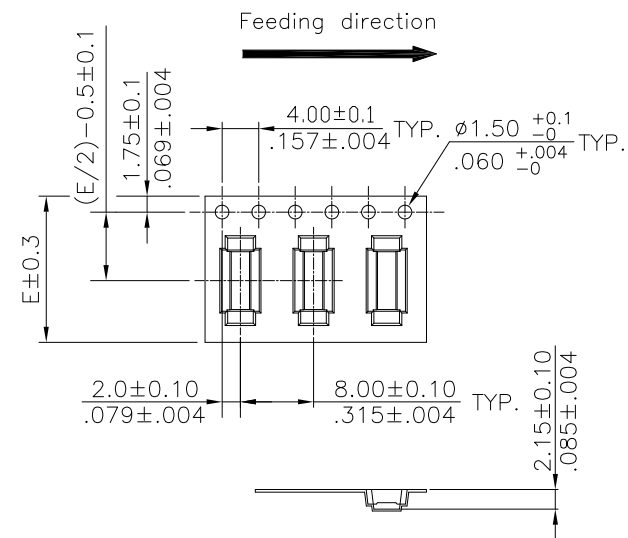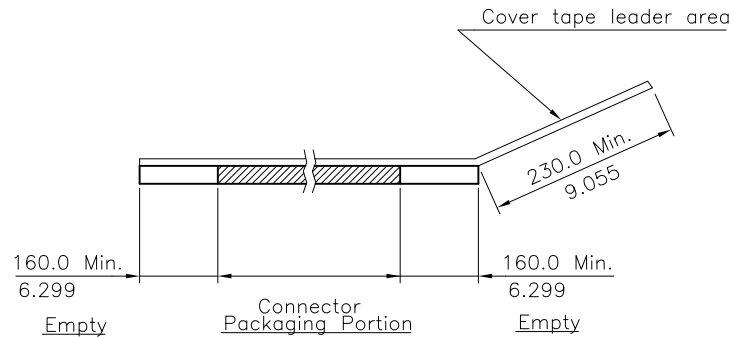

WIDTH : 16,24 mm Carrier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

NP0519-P03PR-xxx-LF

SERIES

MALE

POST

UNMATED

HIGH 0.3mm

LEADFREE

010-022 WAY

REEL

DESCRIPTION: