

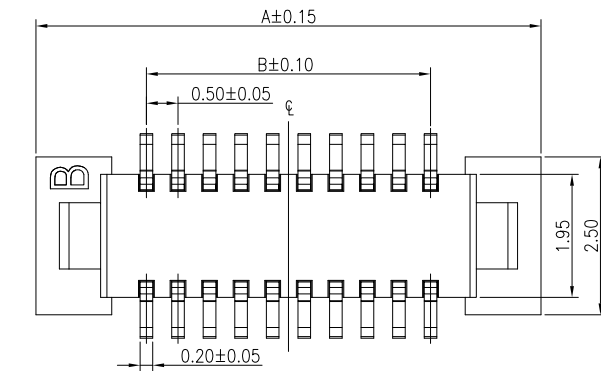

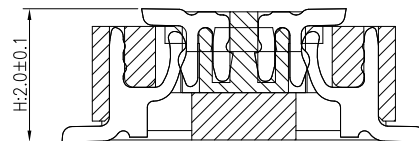


3D VIEW

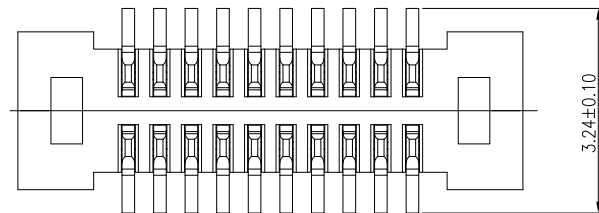


NOTES:

- 1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1*GOLD FLASH OVERALL 50~100* NICKEL UNDER PLATED.

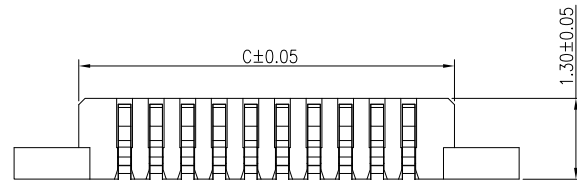

MATING HEIGHT

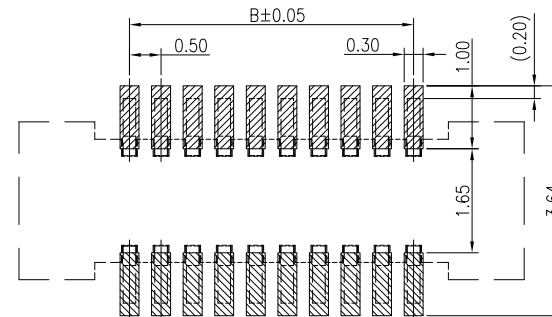

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ± 0.05

NO.of contacts	Dimensions		
	A.	B.	C.
8			
10	5.50	2.00	3.45
12	6.00	2.50	3.95
16	7.00	3.50	4.95
18	7.50	4.00	5.45
20	8.00	4.50	5.95
22	8.50	5.00	6.45
24	9.00	5.50	6.95
26	9.50	6.00	7.45
28	10.00	6.50	7.95
30	10.50	7.00	8.45
32	11.00	7.50	8.95
36	12.00	8.50	9.95
40	13.00	9.50	10.95
50	15.50	12.00	13.45
60	18.00	14.50	15.95
70	20.50	17.00	18.45
100			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

NP0519-P05XR-xxx-LF



SERIES

LEADFREE
010~070WAY

REEL



NON POST
UNMATED HIGH 0.5mm
MALE

DESCRIPTION:

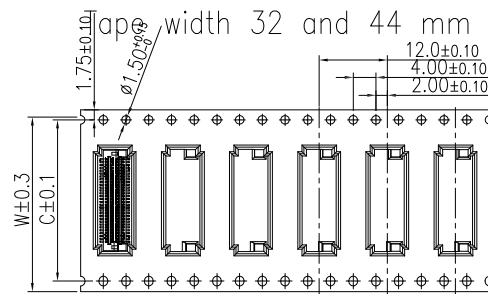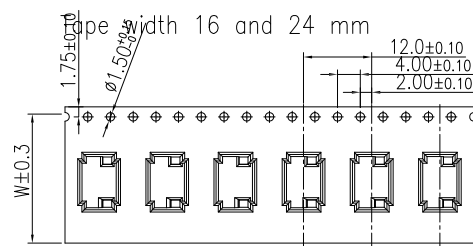

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 100mm.
3. Material: black conductive polystyrene alloy.
4. Material Thickness: 0.3 ± 0.05 mm.
5. All dimensions meet EIA-481-B requirements.
6. 5000pcs Pef Reel.
7. For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

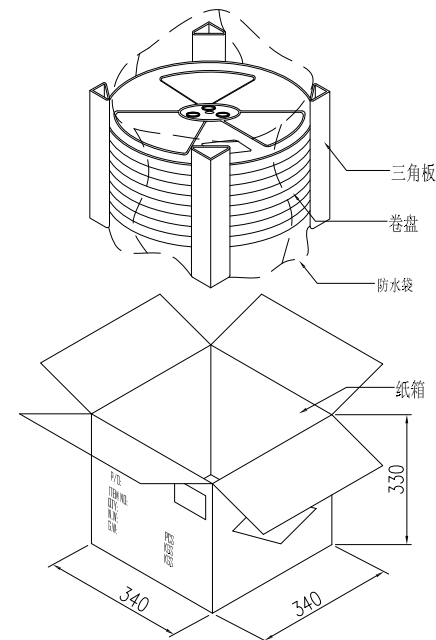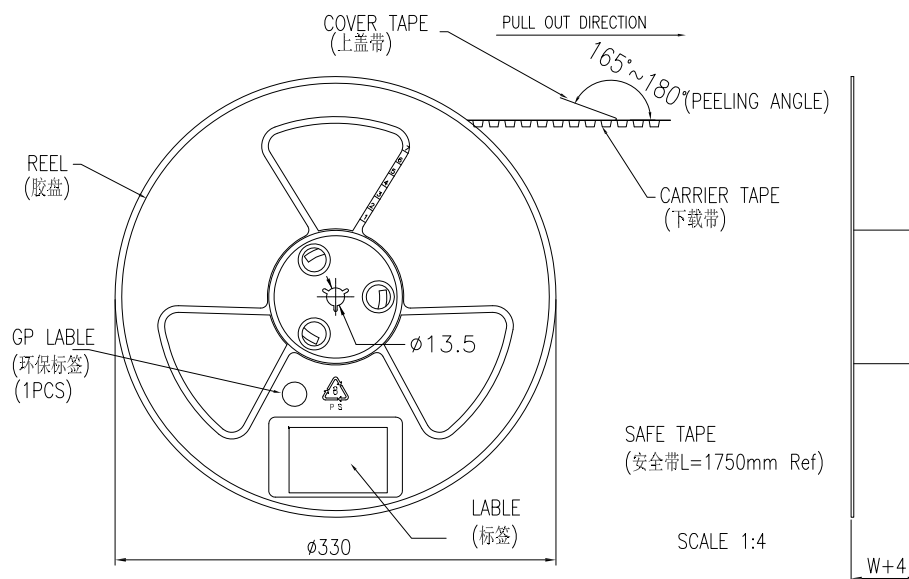

PIN NO.	W	C	PCS/REEL (PLUG)	PCS/REEL (REC)	REEL/CARTON
4PIN~20PIN	16	—	4000	2000	15
22PIN~52PIN	24	—	4000	2000	10
54Pin~70PIN	32	28.4	4000	2000	8
72Pin~100PIN	44	40.4	4000	2000	6

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP0519-P05XR-xxx-LF

SERIES

LEADFREE

010~070WAY

REEL

NON POST

UNMATED HIGH 0.5mm

MALE

DESCRIPTION: Socket & Header Type 包裝圖