
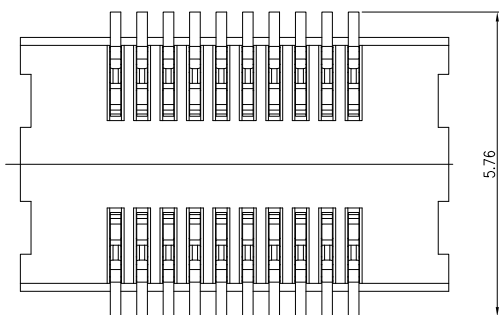
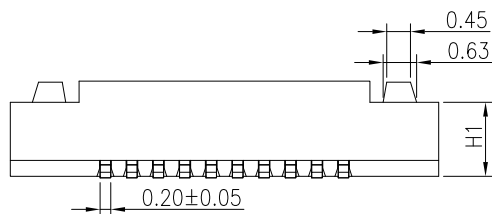
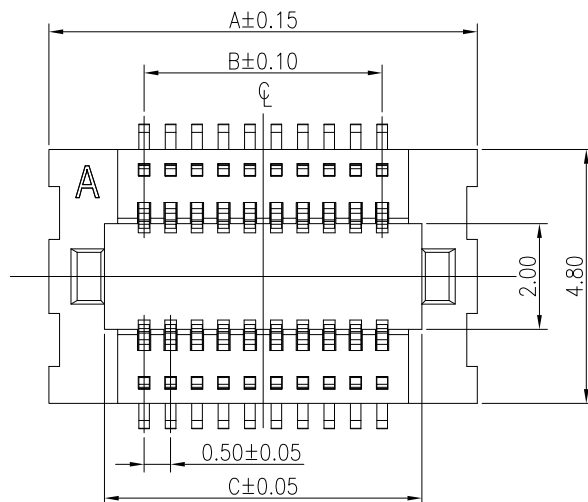




3D VIEW

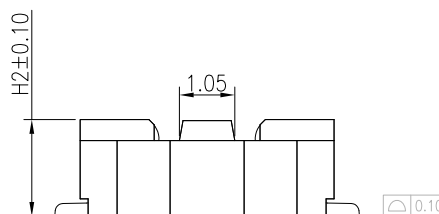

MATING HEIGHT

NOTES:

- 1.HOUSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.TERMINAL:PHOSPHOR BRONZE
- PLATING:1*''GOLD FLASH OVERALL 50~100*''NICKEL UNDER PLATED.

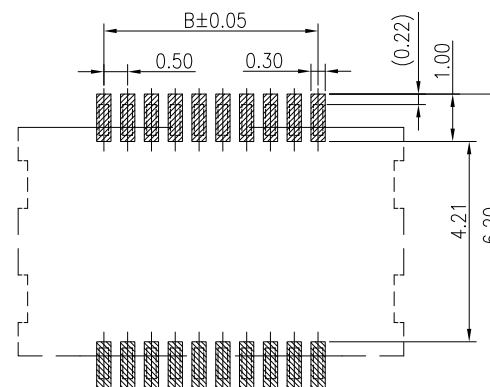

RECOMMENDED PCB PATTERN DIM.
TOLERANCE : ±0.05

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	H1	H2
1.5	1.5	1.5	0.9	1.4
2.0		2.0	1.4	1.9
2.5		2.5	1.9	2.4

NO.of contacts	Dimensions		
	A.	B.	C.
8			
10	5.60	2.00	3.50
12	6.10	2.50	4.00
16	7.10	3.50	5.00
18	7.60	4.00	5.50
20	8.10	4.50	6.00
22	8.60	5.00	6.50
24	9.10	5.50	7.00
26	9.60	6.00	7.50
28	10.10	6.50	8.00
30	10.60	7.00	8.50
32	11.10	7.50	9.00
36	12.10	8.50	10.00
40	13.10	9.50	11.00
50	15.60	12.00	13.50
60	18.10	14.50	16.00
70	20.60	17.00	18.50
80	23.10	19.50	21.00
100			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框


ORDER INFORMATION

NP0519-SxxXR-xxx-LF

SERIES LEADFREE
010~080WAY

REEL
NON POST
FEMALE 10:UNMATED HIGH 1.0mm
15:UNMATED HIGH 1.5mm
20:UNMATED HIGH 2.0mm

DESCRIPTION:



ORDER INFORMATION

NP0519-SxxXR-xxx-LF

SERIES 010~080WAY LEADFREE

	REEL	NON POST	
FEMALE	10:UNMATED HIGH	1.0mm	
	15:UNMATED HIGH	1.5mm	
	20:UNMATED HIGH	2.0mm	

DESCRIPTION: Socket & Header Type 包裝圖

RoHS Compliant

TOLERANCES ARE

照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE _____

PPOJECTION 

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±