


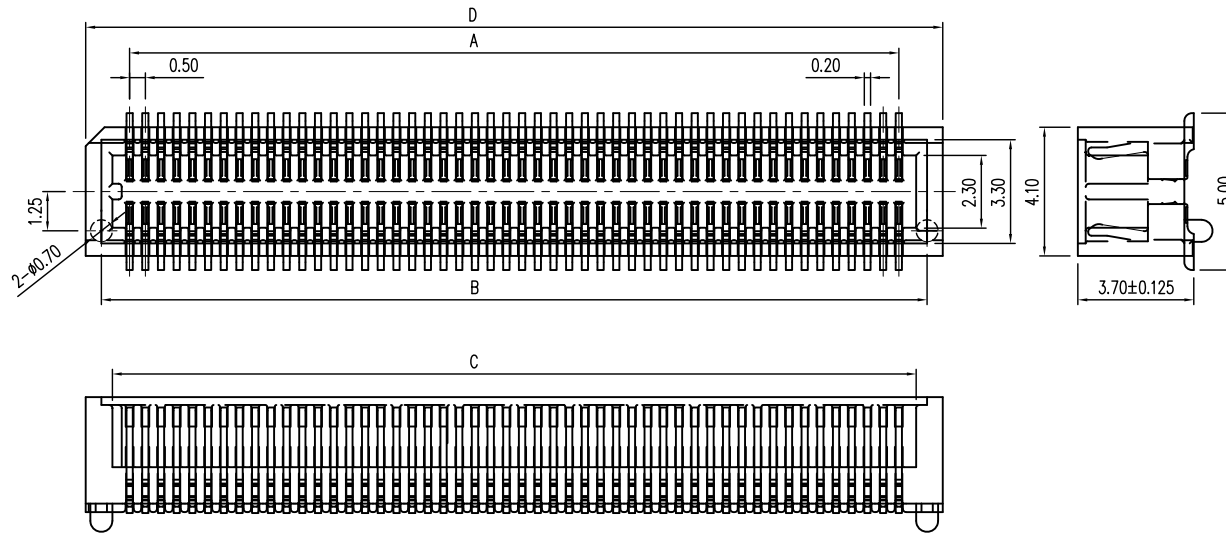

NOTE



A. Material:

1. Housing : HTN, UL94V-0, Black
2. Contact : Copper Alloy.
3. Plating : Gold Plating.

B. Temperature: -20 to +105°

C. Electrical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40m Ω max.
4. Dielectric Withstanding Voltage :
500V AC / 1 min.
5. Insulation Resistance : 100M Ω min.

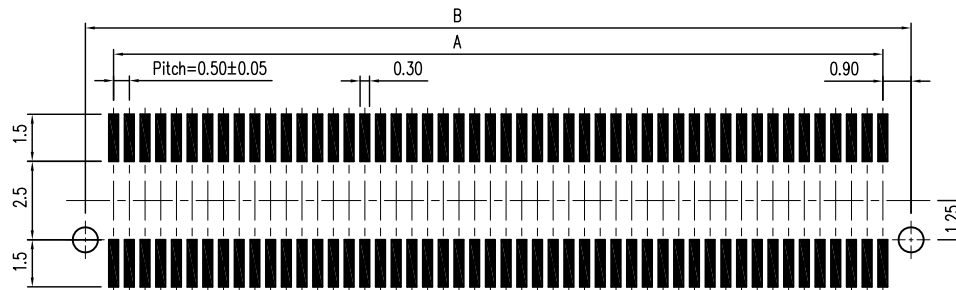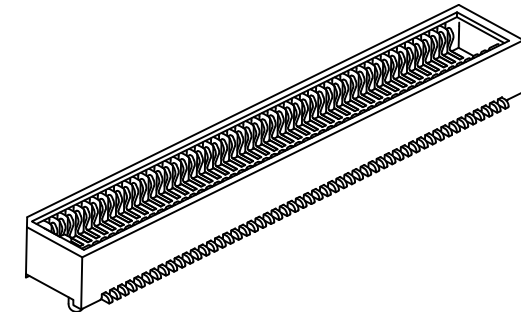

PCB Layout For
Surface Mounting

PIN	Order NO.	DIMENSION				PIN	Order NO.	DIMENSION			
		A	B	C	D			A	B	C	D
020	NP0523-P37P-020	4.50	6.30	5.60	7.30	070	NP0523-P37P-070	17.00	18.80	18.10	19.80
030	NP0523-P37P-030	7.00	8.80	8.10	9.80	080	NP0523-P37P-080	19.50	21.30	20.60	22.30
040	NP0523-P37P-040	9.50	11.30	10.60	12.30	090	NP0523-P37P-090	22.00	23.80	23.10	24.80
050	NP0523-P37P-050	12.00	13.80	13.10	14.80	100	NP0523-P37P-100	24.50	26.30	25.60	27.30
060	NP0523-P37P-060	14.50	16.30	15.60	17.30						

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

NP0523-P37P-xxx-LF

SERIES

LEADFREE

020~100WAY

POST

UNMATED HIGH 3.7mm

PLUG

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.50mm (0.0197") Pitch Board To Board Female connector B-type H=3.70mm