
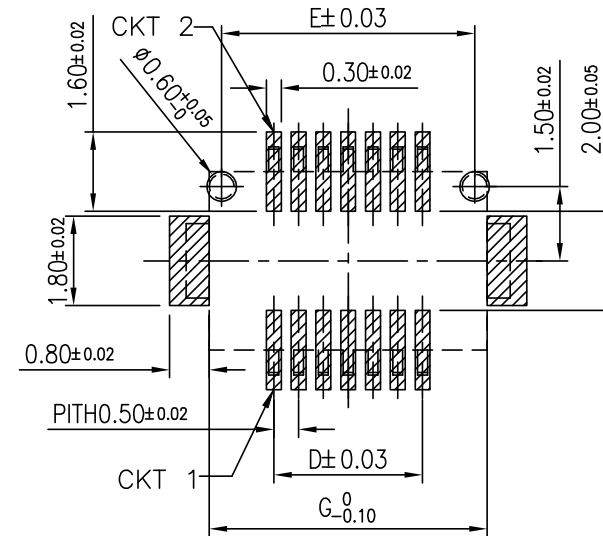
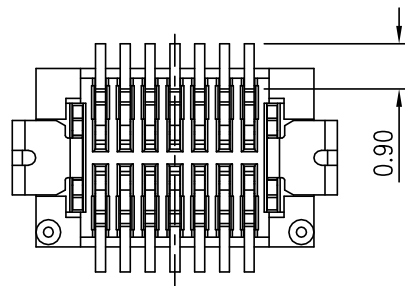
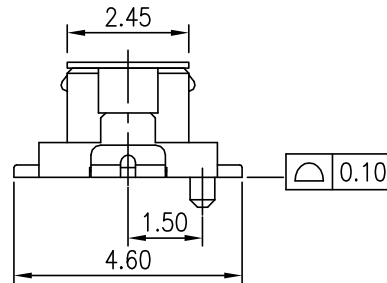


NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR IS NATURAL.
 - 1.2 CONTACT: COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT: GOLD FLASH OVER ALL
 - 2.2 CONTACT: 50u" MIN. NICKEL UNDERPLATING OVERALL.
3. IR REFLOW CAPABLE TO 260°C

CKT	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	MYLAR SIZE
010	4.6	3.15	2.70	2.00	4.10	2.8	4.6	3.00
014	5.6	4.15	3.70	3.00	5.10	3.8	5.6	3.00
020	7.1	5.65	5.20	4.50	6.60	5.3	7.1	3.00
024	8.1	6.65	6.20	5.50	7.60	6.3	8.1	6.00
030	9.6	8.15	7.70	7.00	9.10	7.8	9.6	6.00
032	10.1	8.65	8.20	7.50	9.60	8.3	10.1	6.00
036	11.1	9.65	9.20	8.50	10.60	9.3	11.1	6.00
040	12.1	10.65	10.20	9.50	11.60	10.3	12.1	6.00
050	14.6	13.15	12.70	12.00	14.10	12.8	14.6	6.00
060	17.1	15.65	15.20	14.50	16.60	15.3	17.1	6.00
080	22.1	20.65	20.20	19.50	21.60	20.3	22.1	6.00

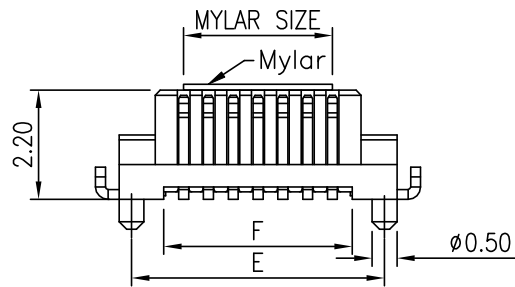

RECOMMENDED PCB LAYOUT
GENERAL TOLORANCE ±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG ± 2°

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

NP0524-S07EP2C-xxx-LF

SERIES | LEADFREE
010-080WAY
MYLAR
FEMALE | EAR+POST
UNMATED HIGH 0.7mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.5mm B-T-B CONNECTOR RCPT D/R S/T SMT TYPE