





NOTES: MATERIAL & FINISH
1.INSULATOR:HIGH-TEMP THERMOPLASTIC, UL94V-0
COLOR:NATURE OR BLACK
2.CONTACT:COPPER ALLOY
△ PLATING: TIN OR GOLD FLASH OVERALL NICKEL UNDER PLATED

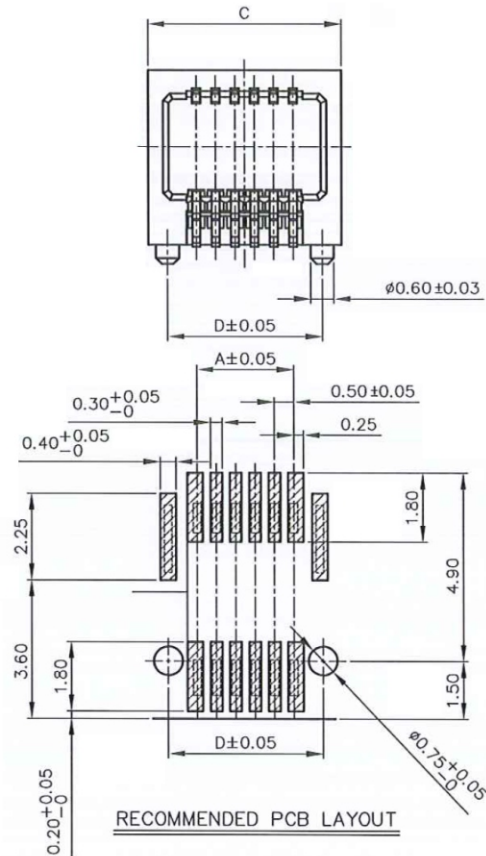

PIN	A	C	D	E
08	1.50	4.00	3.00	3.00
10	2.00	4.50	3.50	3.50
12	2.50	5.00	4.00	4.00
14	3.00	5.50	4.50	4.50
16	3.50	6.00	5.00	5.00
18	4.00	6.50	5.50	5.50
20	4.50	7.00	6.00	6.00
22	5.00	7.50	6.50	6.50
24	5.50	8.00	7.00	7.00
26	6.00	8.50	7.50	7.50
28	6.50	9.00	8.00	8.00
30	7.00	9.50	8.50	8.50
32	7.50	10.00	9.00	9.00
34	8.00	10.50	9.50	9.50
36	8.50	11.00	10.00	10.00
38	9.00	11.50	10.50	10.50
40	9.50	12.00	11.00	11.00
42	10.00	12.50	11.50	11.50
44	10.50	13.00	12.00	12.00
46	11.00	13.50	12.50	12.50
48	11.50	14.00	13.00	13.00
50	12.00	14.50	13.50	13.50
52	12.50	15.00	14.00	14.00
54	13.00	15.50	14.50	14.50
56	13.50	16.00	15.00	15.00
58	14.00	16.50	15.50	15.50
60	14.50	17.00	16.00	16.00
62	15.00	17.50	16.50	16.50
64	15.50	18.00	17.00	17.00
66	16.00	18.50	17.50	17.50
68	16.50	19.00	18.00	18.00
70	17.00	19.50	18.50	18.50
72	17.50	20.00	19.00	19.00
74	18.00	20.50	19.50	19.50
76	18.50	21.00	20.00	20.00
78	19.00	21.50	20.50	20.50
80	19.50	22.00	21.00	21.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP05246-PW40P-xxx-LF

SERIES

LEADFREE

008~060WAY

POST

LONG 4.0mm

90°SMT

MALE

DESCRIPTION: