
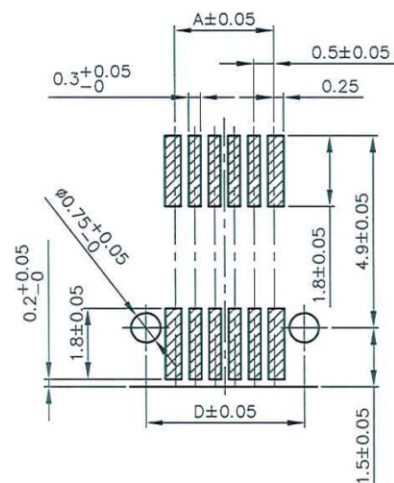
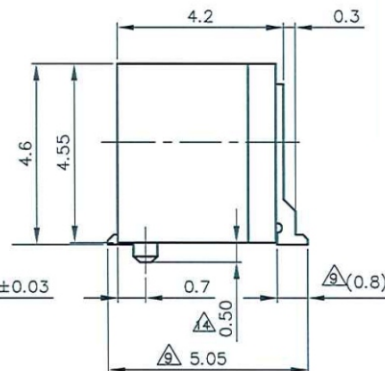



0.5±0.05 A±0.10 0.2±0.03

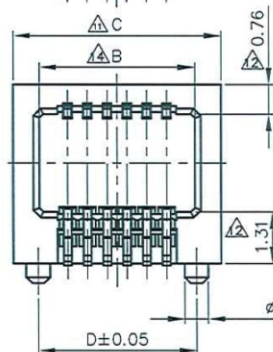

RECOMMENDED PCB LAYOUT

NOTES: MATERIAL & FINISH  
1.INSULATOR:HIGH-TEMP THERMOPLASTIC, UL94V-0  
COLOR:NATURE OR BLACK  
2.CONTACT: COPPER ALLOY  
PLATING: GOLD FLASH OR TIN  
OVERALL NICKEL UNDER PLATED.

| PIN | A     | △AB   | △AC   | D     | PIN | A     | △AB   | △AC   | D     |
|-----|-------|-------|-------|-------|-----|-------|-------|-------|-------|
| 08  | 1.50  | 2.93  | 4.25  | 3.00  | 56  | 13.50 | 14.93 | 16.25 | 15.00 |
| 10  | 2.00  | 3.43  | 4.75  | 3.50  | 58  | 14.00 | 15.43 | 16.75 | 15.50 |
| 12  | 2.50  | 3.93  | 5.25  | 4.00  | 60  | 14.50 | 15.93 | 17.25 | 16.00 |
| 14  | 3.00  | 4.43  | 5.75  | 4.50  | 62  | 15.00 | 16.43 | 17.75 | 16.50 |
| 16  | 3.50  | 4.93  | 6.25  | 5.00  | 64  | 15.50 | 16.93 | 18.25 | 17.00 |
| 18  | 4.00  | 5.43  | 6.75  | 5.50  | 66  | 16.00 | 17.43 | 18.75 | 17.50 |
| 20  | 4.50  | 5.93  | 7.25  | 6.00  | 68  | 16.50 | 17.93 | 19.25 | 18.00 |
| 22  | 5.00  | 6.43  | 7.75  | 6.50  | 70  | 17.00 | 18.43 | 19.75 | 18.50 |
| 24  | 5.50  | 6.93  | 8.25  | 7.00  | 72  | 17.50 | 18.93 | 20.25 | 19.00 |
| 26  | 6.00  | 7.43  | 8.75  | 7.50  | 74  | 18.00 | 19.43 | 20.75 | 19.50 |
| 28  | 6.50  | 7.93  | 9.25  | 8.00  | 76  | 18.50 | 19.93 | 21.25 | 20.00 |
| 30  | 7.00  | 8.43  | 9.75  | 8.50  | 78  | 19.00 | 20.43 | 21.75 | 20.50 |
| 32  | 7.50  | 8.93  | 10.25 | 9.00  | 80  | 19.50 | 20.93 | 22.25 | 21.00 |
| 34  | 8.00  | 9.43  | 10.75 | 9.50  | 82  | 20.00 | 21.43 | 22.75 | 21.50 |
| 36  | 8.50  | 9.93  | 11.25 | 10.00 | 84  | 20.50 | 21.93 | 23.25 | 22.00 |
| 38  | 9.00  | 10.43 | 11.75 | 10.50 | 86  | 21.00 | 22.43 | 23.75 | 22.50 |
| 40  | 9.50  | 10.93 | 12.25 | 11.00 | 88  | 21.50 | 22.93 | 24.25 | 23.00 |
| 42  | 10.00 | 11.43 | 12.75 | 11.50 | 90  | 22.00 | 23.43 | 24.75 | 23.50 |
| 44  | 10.50 | 11.93 | 13.25 | 12.00 | 92  | 22.50 | 23.93 | 25.25 | 24.00 |
| 46  | 11.00 | 12.43 | 13.75 | 12.50 | 94  | 23.00 | 24.43 | 25.75 | 24.50 |
| 48  | 11.50 | 12.93 | 14.25 | 13.00 | 96  | 23.50 | 24.93 | 26.25 | 25.00 |
| 50  | 12.00 | 13.43 | 14.75 | 13.50 | 98  | 24.00 | 25.43 | 26.75 | 25.50 |
| 52  | 12.50 | 13.93 | 15.25 | 14.00 | A0  | 24.50 | 25.93 | 27.25 | 26.00 |
| 54  | 13.00 | 14.43 | 15.75 | 14.50 | C0  | 29.50 | 30.93 | 32.25 | 31.00 |

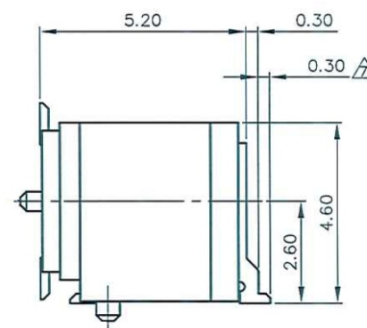

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP05246-PW42P-xxx-LF

SERIES

LEADFREE

008~060 WAY

POST

LONG 4.2mm

90°SMT

MALE

DESCRIPTION: