

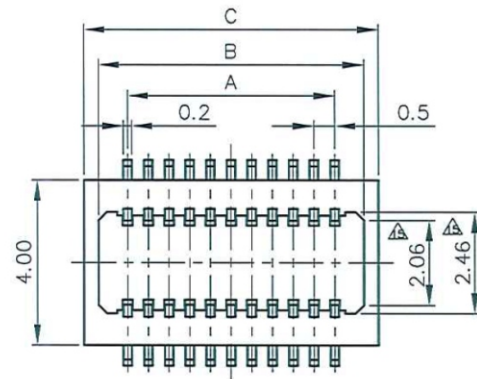


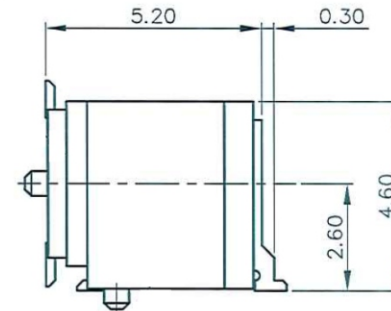

NOTES: MATERIAL & FINISH

- 1.INSULATOR:HIGH-TEMP THERMOPLASTIC, UL94V-0
COLOR:NATURE OR BLACK
- 2.CONTACT:COPPER ALLOY
PLATING: GOLD FLASH OR TIN OR MATTE-TIN
OVERALL NICKEL UNDER PLATED.

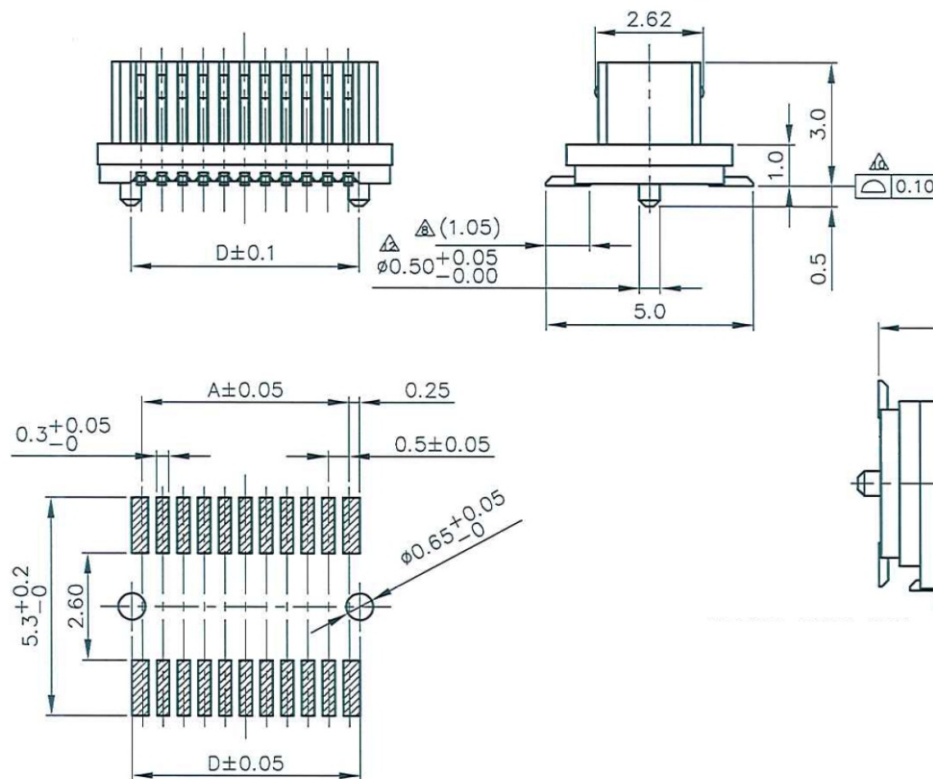

PIN	A	B	C	D
08	1.5	2.9	3.6	2.0
10	2.0	3.4	4.1	2.5
12	2.5	3.9	4.6	3.0
14	3.0	4.4	5.1	3.5
16	3.5	4.9	5.6	4.0
18	4.0	5.4	6.1	4.5
20	4.5	5.9	6.6	5.0
22	5.0	6.4	7.1	5.5
24	5.5	6.9	7.6	6.0
26	6.0	7.4	8.1	6.5
28	6.5	7.9	8.6	7.0
30	7.0	8.4	9.1	7.5
32	7.5	8.9	9.6	8.0
34	8.0	9.4	10.1	8.5
36	8.5	9.9	10.6	9.0
38	9.0	10.4	11.1	9.5
40	9.5	10.9	11.6	10.0
42	10.0	11.4	12.1	10.5
44	10.5	11.9	12.6	11.0
46	11.0	12.4	13.1	11.5
48	11.5	12.9	13.6	12.0
50	12.0	13.4	14.1	12.5
52	12.5	13.9	14.6	13.0
54	13.0	14.4	15.1	13.5
56	13.5	14.9	15.6	14.0
58	14.0	15.4	16.1	14.5
60	14.5	15.9	16.6	15.0
62	15.0	16.4	17.1	15.5
64	15.5	16.9	17.6	16.0
66	16.0	17.4	18.1	16.5
68	16.5	17.9	18.6	17.0
70	17.0	18.4	19.1	17.5
72	17.5	18.9	19.6	18.0
74	18.0	19.4	20.1	18.5
76	18.5	19.9	20.6	19.0
78	19.0	20.4	21.1	19.5
80	19.5	20.9	21.6	20.0
82	20.0	21.4	22.1	20.5
84	20.5	21.9	22.6	21.0
86	21.0	22.4	23.1	21.5
88	21.5	22.9	23.6	22.0
90	22.0	23.4	24.1	22.5
92	22.5	23.9	24.6	23.0
94	23.0	24.4	25.1	23.5
96	23.5	24.9	25.6	24.0
98	24.0	25.4	26.1	24.5
A0	24.5	25.9	26.6	25.0
C0	29.5	30.9	31.6	30.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP05246-SV10P-xxx-LF

SERIES

LEADFREE

008~060 WAY

POST

HIGH 1.0mm

180°SMT

FEMALE

DESCRIPTION: