
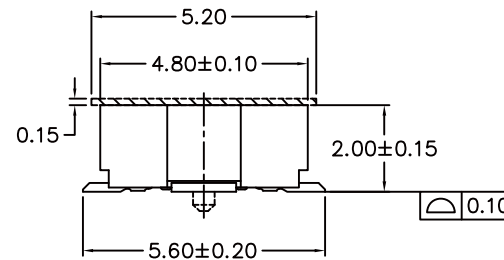
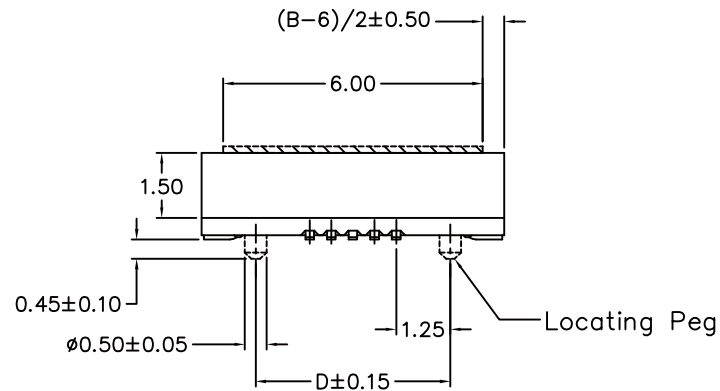
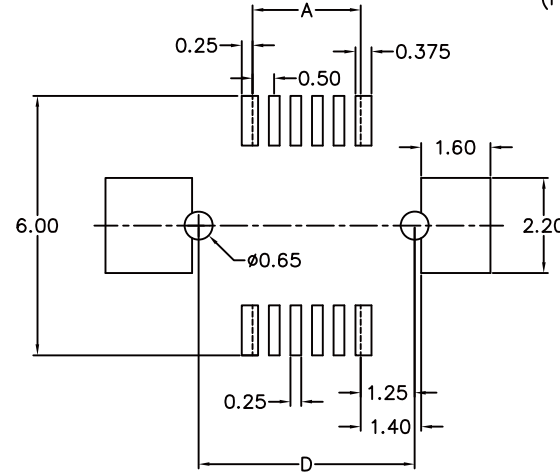


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. CURRENT RATING: 0.5 AMPERE.
2. CONTACT RESISTANCE: 60 m ohms MAX. FOR INITIAL.
3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC rms./MINUTE.
4. INSULATION RESISTANCE: 100 M ohms MIN..
5. HARMFUL MATERIAL SHOULD BE COMPLIANT TO DOC.

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

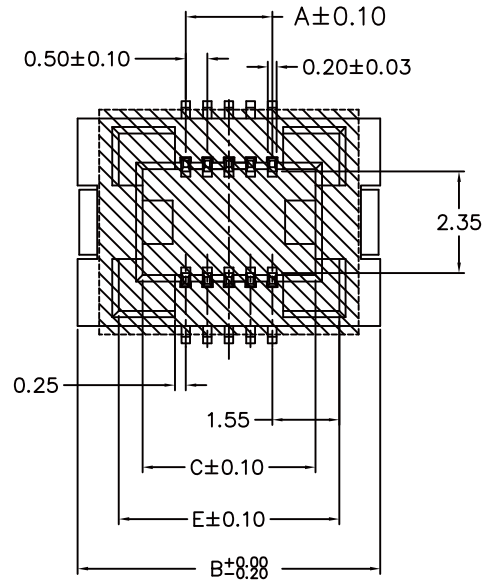

CIRCUITS	DIM A	DIM B	DIM C	DIM D	DIM E
10	2.00	7.00	4.07	4.50	5.10
12	2.50	7.50	4.57	5.00	5.60
14	3.00	8.00	5.07	5.50	6.10
16	3.50	8.50	5.57	6.00	6.60
18	4.00	9.00	6.07	6.50	7.10
20	4.50	9.50	6.57	7.00	7.60
22	5.00	10.00	7.07	7.50	8.10
24	5.50	10.50	7.57	8.00	8.60
26	6.00	11.00	8.07	8.50	9.10
28	6.50	11.50	8.57	9.00	9.60
30	7.00	12.00	9.07	9.50	10.10
32	7.50	12.50	9.57	10.00	10.60
34	8.00	13.00	10.07	10.50	11.10
36	8.50	13.50	10.57	11.00	11.60
38	9.00	14.00	11.07	11.50	12.10
40	9.50	14.50	11.57	12.00	12.60
42	10.00	15.00	12.07	12.50	13.10
44	10.50	15.50	12.57	13.00	13.60
46	11.00	16.00	13.07	13.50	14.10
48	11.50	16.50	13.57	14.00	14.60
50	12.00	17.00	14.07	14.50	15.10
52	12.50	17.50	14.57	15.00	15.60
54	13.00	18.00	15.07	15.50	16.10
56	13.50	18.50	15.57	16.00	16.60
58	14.00	19.00	16.07	16.50	17.10
60	14.50	19.50	16.57	17.00	17.60
62	15.00	20.00	17.07	17.50	18.10
64	15.50	20.50	17.57	18.00	18.60
66	16.00	21.00	18.07	18.50	19.10
68	16.50	21.50	18.57	19.00	19.60
70	17.00	22.00	19.07	19.50	20.10
72	17.50	22.50	19.57	20.00	20.60
74	18.00	23.00	20.07	20.50	21.10
76	18.50	23.50	20.57	21.00	21.60
78	19.00	24.00	21.07	21.50	22.10
80	19.50	24.50	21.57	22.00	22.60
82	20.00	25.00	22.07	22.50	23.10
84	20.50	25.50	22.57	23.00	23.60
86	21.00	26.00	23.07	23.50	24.10
88	21.50	26.50	23.57	24.00	24.60
90	22.00	27.00	24.07	24.50	25.10
92	22.50	27.50	24.57	25.00	25.60
94	23.00	28.00	25.07	25.50	26.10
96	23.50	28.50	25.57	26.00	26.60
98	24.00	29.00	26.07	26.50	27.10
100	24.50	29.50	26.57	27.00	27.60
120	29.50	34.50	31.57	32.00	32.60
140	34.50	39.50	36.57	37.00	37.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

NP0527-P20PC-xxx-LF

SERIES

LEADFREE

010~140WAY

POST+CAP

UNMATED HIGH 2.0mm

MALE

DESCRIPTION: 0.5P, Board to Board Socket type