

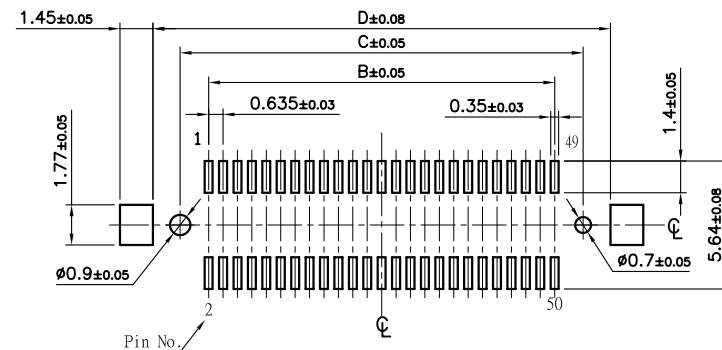
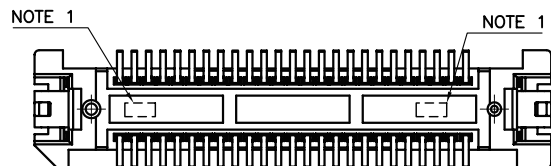
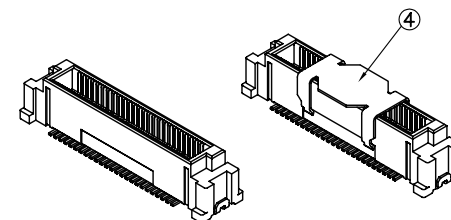


DETAIL FOR SOLDERING AREA



PCB LAYOUT (REF.)

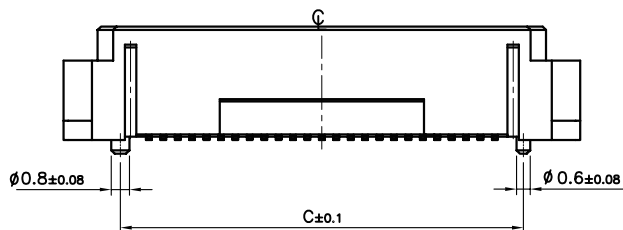

PART NO.	A	B	C	D	REMARK
NP06321-P38ACR-020	13.21	5.70	8.21	10.96	
NP06321-P38ACR-030	16.39	8.88	11.39	14.14	
NP06321-P38ACR-040	19.57	12.06	14.57	17.32	
NP06321-P38ACR-050	22.75	15.24	17.75	20.15	

TABLE 1 CONTACT FINISH		
*	CONTACT AREA	TERMINAL AREA
PLATING	GOLD OVER NICKEL	Sn OVER NICKEL

4	COVER	1	STAINLESS	—	
3	HOLD DOWN	2	COPPER ALLOY	Sn OVER NICKEL	
2	CONTACT	TABLE 2	COPPER ALLOY	TABLE 1	
1	INSULATOR	1	LCP+GF	—	UL94 V-0
NO.	Description	Quantity	Material	Finish	Remark

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

NP06321-P38ACR-xxx-LF

SERIES

MALE

CAP



POST+EAR

UNMATED HIGH 3.8mm

LEADFREE
020~050WAY


REEL

DESCRIPTION:

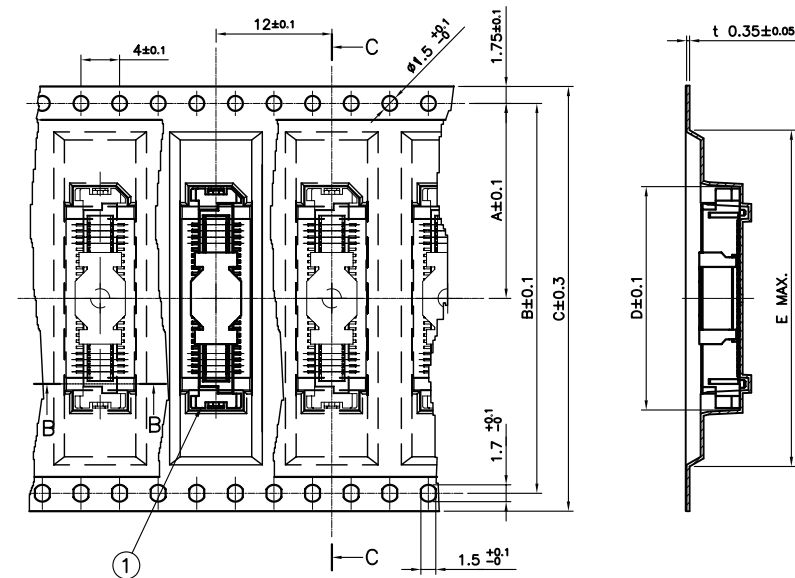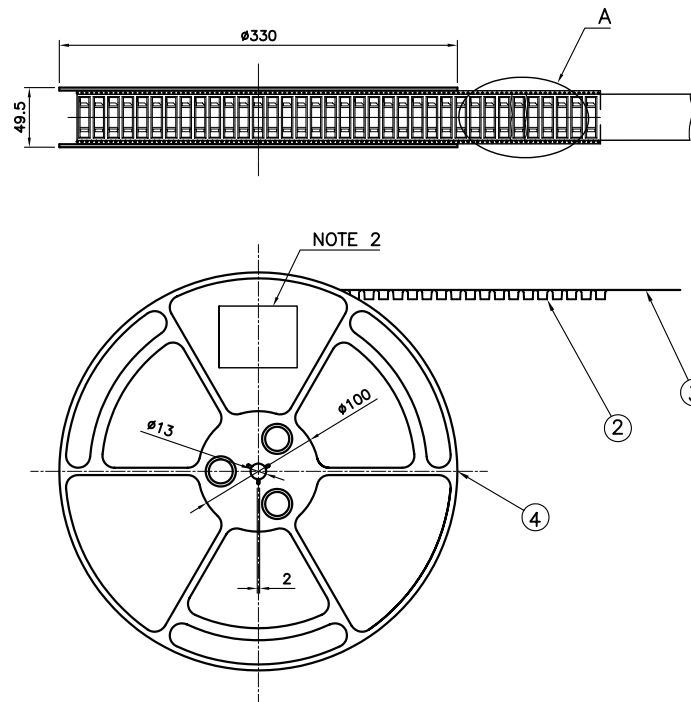


NOTE :

- SUFFIX "-E800" OF THE PART NUMBER INDICATES THAT 800 PCS. OF NP06321-P38ACR-xxx CONNECTORS ARE ACCOMMODATED IN ONE REEL.
- THE LABEL IS TO BE ATTACHED ON THE MAGAZINE AS SHOWN.
- REFER. TO THE DRAWING, NP06321-P28ACR-xxx THE DIMENSIONS OF THE CONNECTOR.

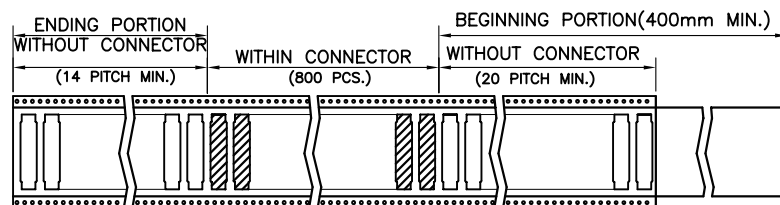

DIRECTION



PART NO.	A	B	C	D	E	REMARK
NP06321-P38ACR-020	11.5	—	24	13.61	26	
NP06321-P38ACR-030	11.5	—	24	16.79	29	
NP06321-P38ACR-040	14.2	28.4	32	19.97	32	
NP06321-P38ACR-050	20.2	40.4	44	23.15	35	

4	REEL	1	—	—
3	COVER-TAPE	—	PET	—
2	CARRIER-TAPE	—	PS	—
1	CONNECTOR	800	—	—
NO.	Description	Quantity	Material	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP06321-P38ACR-xxx-LF

SERIES

MALE

REEL

CAP

POST+EAR

LEADFREE

020~050WAY

UNMATED HIGH 3.8mm

DESCRIPTION: