

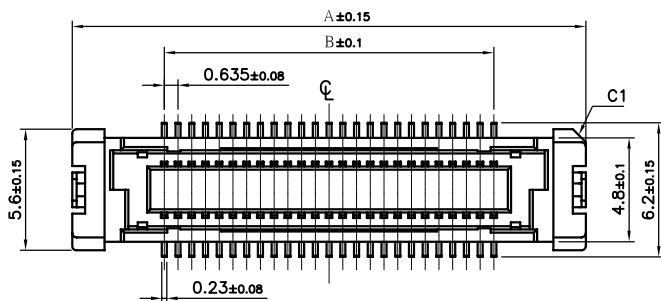
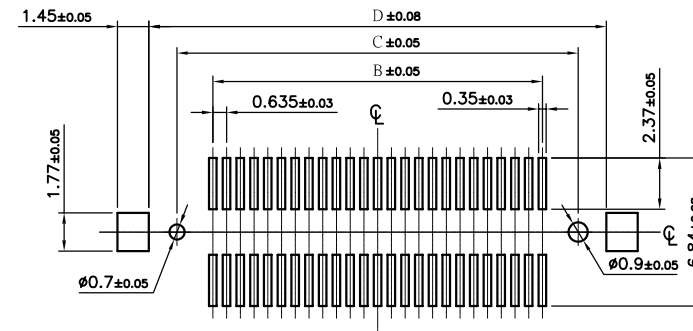
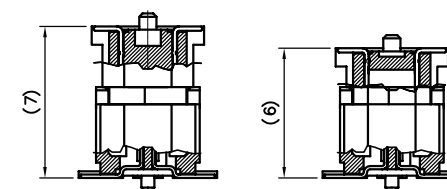


DETAIL FOR SOLDERING AREA





PCB LAYOUT (REF.)

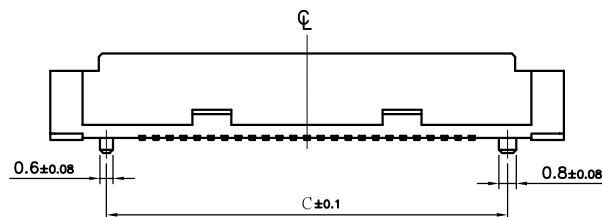

MATED CONDITION (REF.)

(NOTE2)

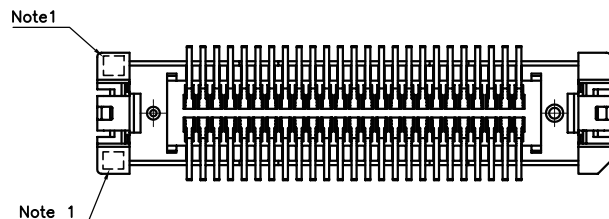

NOTE :

1. COMPANY LOGO AND CAVITY NUMBER ARE MARKED AS INDICATED.
2. MATED CONDITION OF PS25 SERIES SOCKET & PLUG, THIS STACK HEIGHT PLEASE SEE TABLE 2
3. CARTON: (L)345X(W)345X(H)330 mm.
PACKIGN TYPE: TRAY
AMOUNT: 5400 PIECE PER CARTON

TABLE 2

STACK HEIGHT	PLUG	SOCKET
6mm	NP06321-P28A-050	NP06321-S32A-xxx
7mm	NP06321-P38A-050	NP06321-S32A-xxx

TABLE 1

Part Name	Part Number	CONTACT QTY.	DIM. A	DIM. B	DIM. C	DIM. D	
NP06321-S32A-050		50	23.75	15.24	18.55	21.15	HOLD DOWN PLATING: LEAD FREE CONTACT PLATING: GOLD
NP06321-S32A-060		60	26.93	18.42	21.73	24.33	HOLD DOWN PLATING: LEAD FREE CONTACT PLATING: GOLD
3	HOLD DOWN	2	COPPER ALLOY	TABLE 1			
2	CONTACT	TABLE 1	COPPER ALLOY	TABLE 1			
1	INSULATOR	1	THERMOPLASTIC HIGH-TEMP	NATURE			UL 94V-0
NO.	Description	Quantity	Material	Finish			Remark

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

NP06321-S32A-xxx-LF

SERIES

LEADFREE

050~060WAY

POST+EAR

UNMATED HIGH 3.2mm

MALE

DESCRIPTION: