

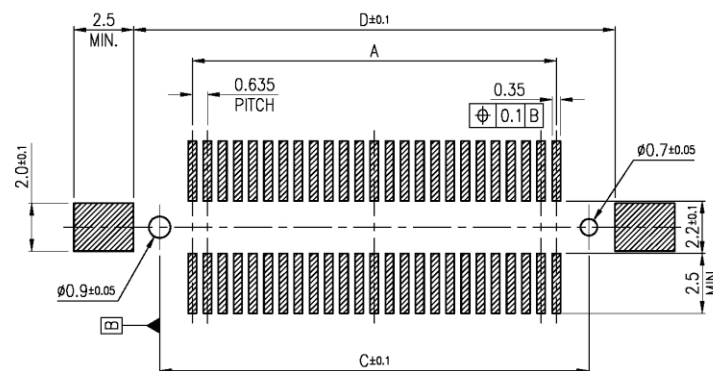
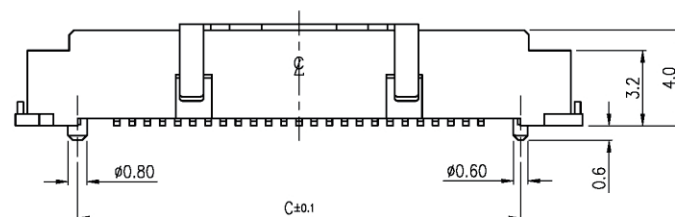


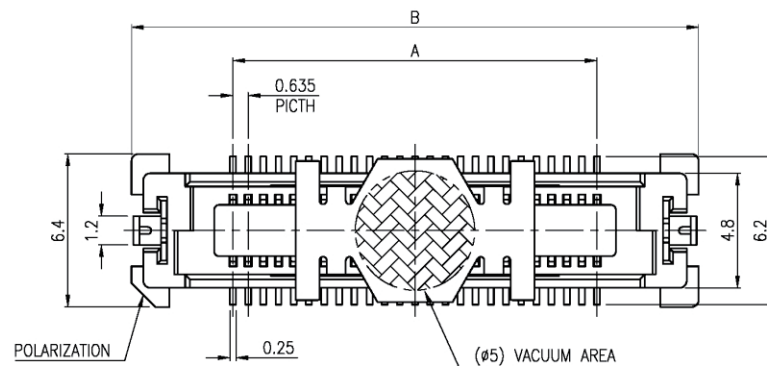


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:NATURAL.
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 FITTING NAIL: COPPER ALLOY
 - 1.4 VACUUM COVER: STAINLESS STEEL
2. FINISH:
 - 2.1 CONTACT:
 - UNDERPLATING: 50u" MIN. NICKEL OVERALL.
 - FINISH: SEE ORDER INFORMATION.
 - 2.2 FITTING NAIL:
 - UNDERPLATING: 50u" MIN. NICKEL OVERALL.
 - FINISH: SEE ORDER INFORMATION.
3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
4. SPEC. PLS. REFER TO
5. COPLANARITY 0.1 MM MAX. BASE ON DATUM A
6. TRUE POSITION 0.1 MM MAX. BASE ON DATUM B



WITH COVER OPTION



WITH MYLAR OPTION

CKT	Dim A	Dim B	Dim C	Dim D
20	5.715	14.225	9.025	10.625
30	8.890	17.400	12.200	13.800
40	12.065	20.575	15.375	16.975
50	15.240	23.750	18.550	20.150
60	18.415	26.925	21.725	23.325
68	20.955	29.465	24.265	25.865
70	21.590	30.100	24.900	26.500
80	24.765	33.275	28.075	29.675
90	27.940	36.450	31.250	32.850
100	31.115	39.625	34.425	36.025
120	37.465	45.975	40.775	42.375
140	43.815	52.325	47.125	48.725
160	50.165	58.675	53.475	55.075
180	56.515	65.025	59.825	61.425
200	62.865	71.375	66.175	67.775
240	75.565	84.075	78.875	80.475

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP06321-S32AC-xxx-LF

SERIES

LEADFREE

050~060WAY

CAP

POST+EAR

UNMATED HIGH 3.2mm

FEMALE

DESCRIPTION: