



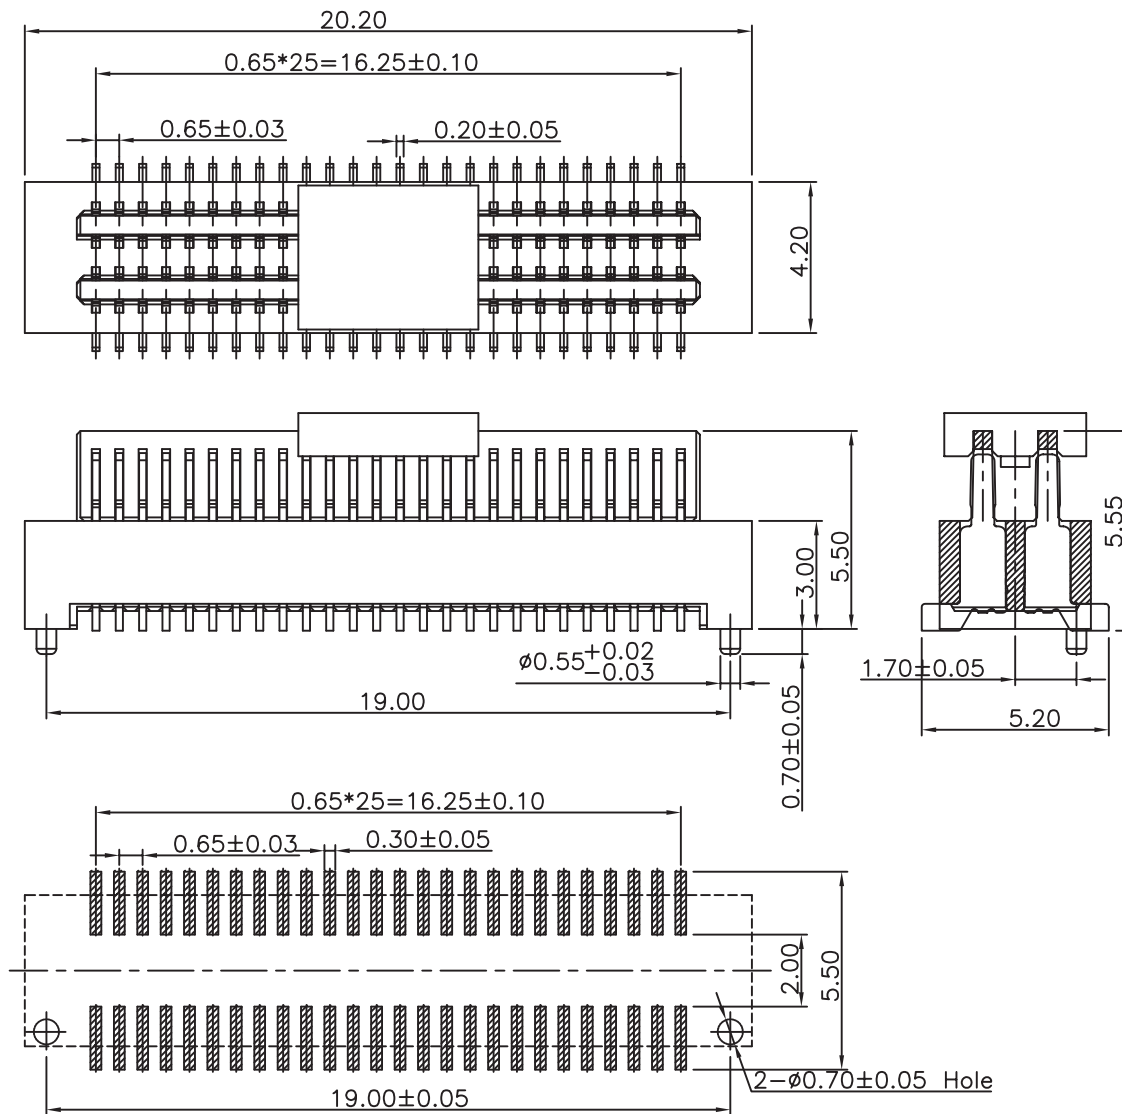

PCB LAYOUT

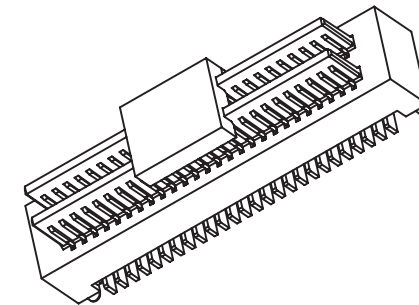

Specifications

1. Current Rating : 0.5A AC/DC
2. Voltage Rating : 60V AC/DC
3. Contact Resistance : 80m ohm. max.
4. Insulation Resistance : 1000M ohm. min.at 100V DC
5. Withstanding Voltage : 150V AC for one minute
6. Operating Temperature Range : -55°C to +85°C

Material and Plating

1. Housing : High Temp Plastic UL94V-0
2. Contact : Phosphor Bronze
3. Plating : Gold Plating

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

NP065K-P30PC-052-LF

SERIES | | | LEAD FREE
52 WAY
CAP
POST
UNMATED HIGH/ 3.0mm
MALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

DESCRIPTION: 0.65mm Board To Board 5.50mm Height Male