

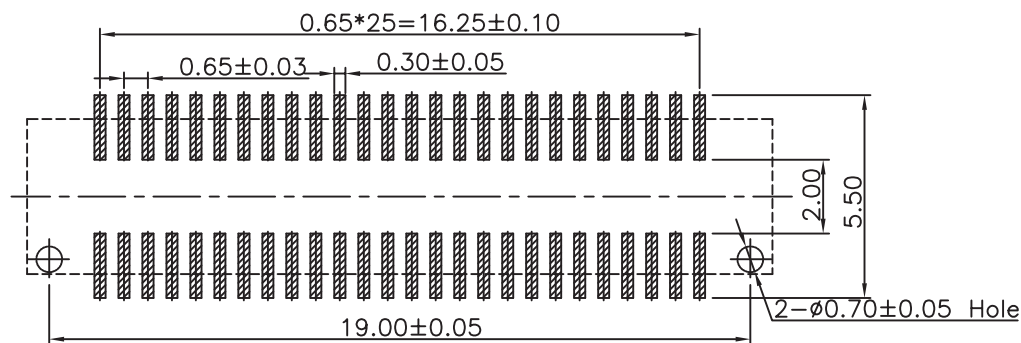

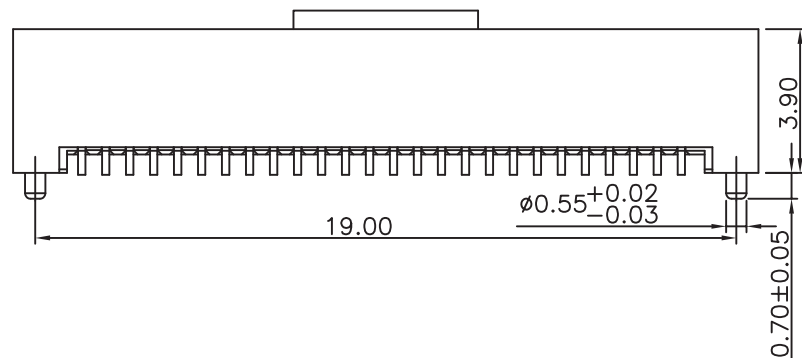


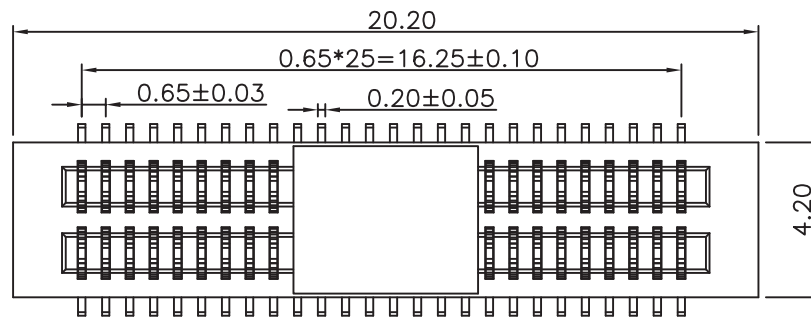

PCB LAYOUT

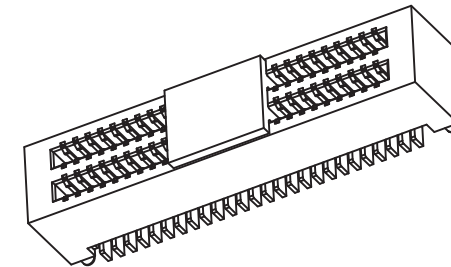

Specifications

1. Current Rating : 0.5A AC/DC
2. Voltage Rating : 60V AC/DC
3. Contact Resistance : 80m ohm. max.
4. Insulation Resistance : 1000M ohm. min.at 100V DC
5. Withstanding Voltage : 150V AC for one minute
6. Operating Temperature Range : -55° C to +85° C

Material and Plating

- 1.Housing : High Temp Plastic UL94V-0
- 2.Contact : Phosphor Bronze
- 3.Plating : Gold Plating

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

NP065K-S39PC-052-LF

SERIES

LEAD FREE

52 WAY

CAP

POST

UNMATED HIGH/ 3.9mm

FEMALE

DESCRIPTION: 0.65mm Board To Board 3.90mm Height Female