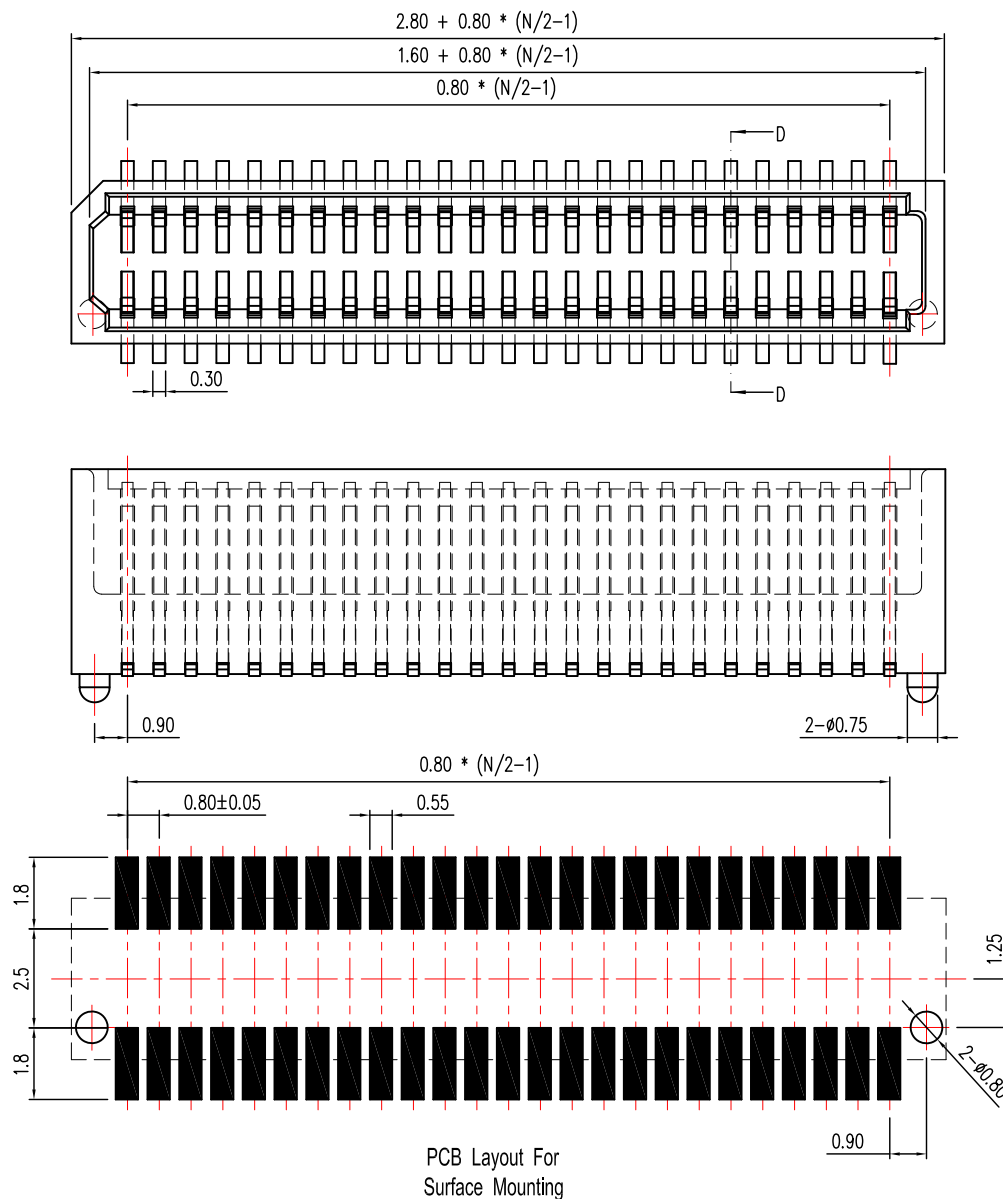


NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
2. Contact : Copper Alloy

B. Plating: Gold plating

C. Temperature: -55 to 125

D. Electrical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40m Ω max.
4. Dielectric Withstanding Voltage : 500V AC / 1 min.
5. Insulation Resistance : 100M Ω min.

Available Pins : 10~100 Contacts $\triangle$

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.10
.XXX $\pm$ 0.05
ANG $\pm$

PPOJECTION $\oplus$

照片框

ORDER INFORMATION

NP08-P505P-xxx-HF
SERIES | POST | UNMATED HIGH/ 5.05mm
MALE

DESCRIPTION: 0.80mm (0.031") Pitch Board To Board Female connector H = 5.05mm