
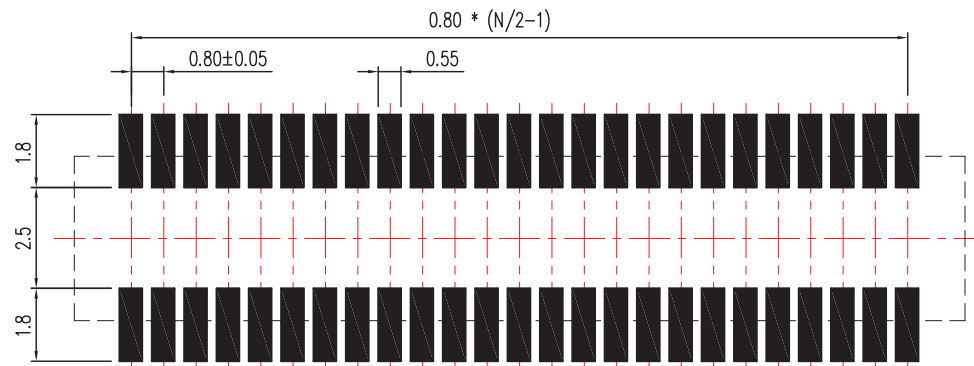
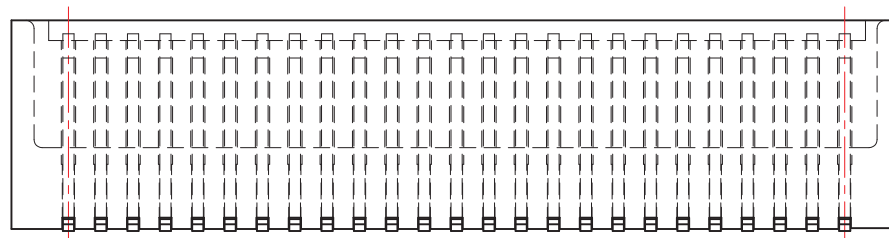
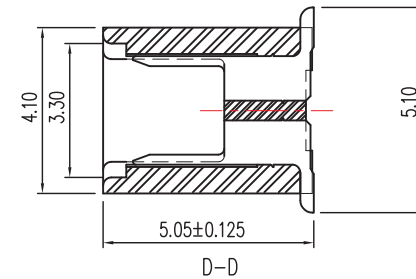


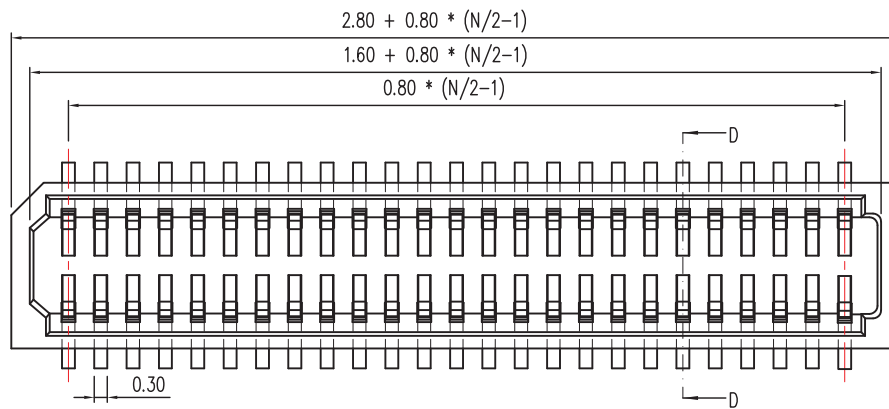

PCB Layout For
Surface Mounting

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free,
UL94V-0, Black

2. Contact : Copper Alloy

B. Plating: Gold plating

C. Temperature: -55 to 125

D. Electrical:

1. Voltage : 50V.

2. Current : 0.5A.

3. Contact Resistance : $40m \Omega$ max.

4. Dielectric Withstanding Voltage :
500V AC / 1 min.

5. Insulation Resistance : $100M \Omega$ min.

Available Pins : 10~100 Contacts

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE


SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.10
.XXX $\pm$ 0.05
ANG $\pm$



ORDER INFORMATION

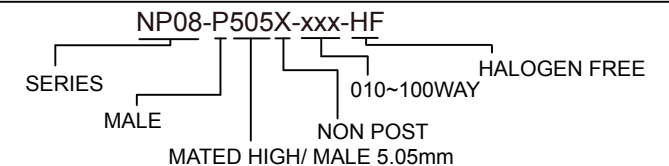

DESCRIPTION: