
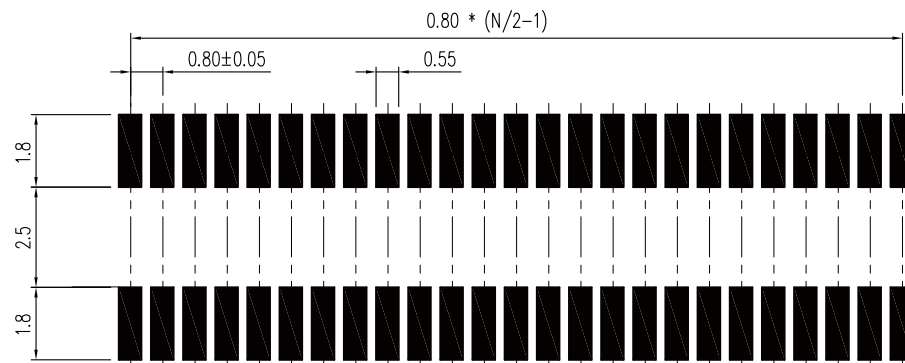
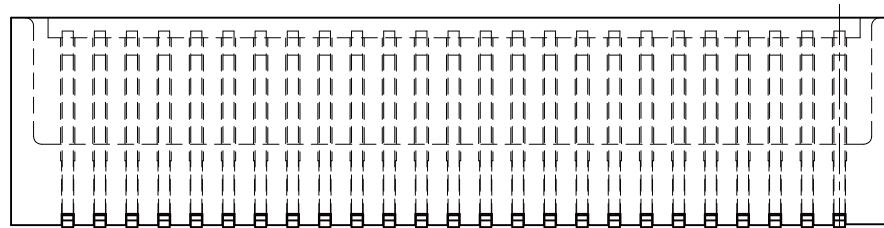
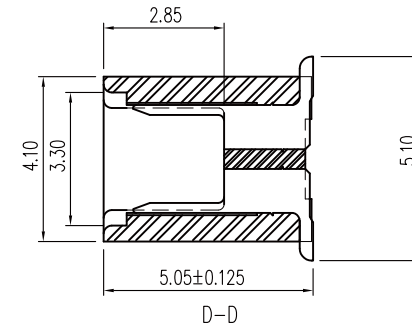


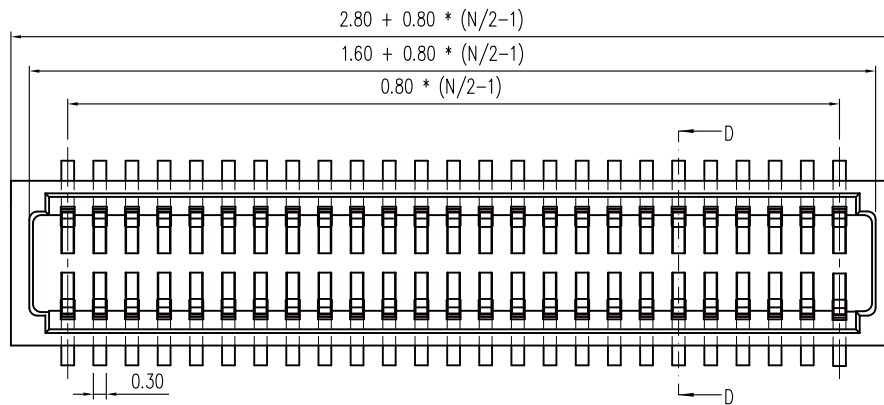

PCB Layout For
Surface Mounting

critical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : $40m \Omega$ max.
4. Dielectric Withstanding Voltage :
500V AC / 1 min.
5. Insulation Resistance : $100M \Omega$ min.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

NP08-P505XR-xxx-LF

SERIES | LEADFREE
010~100WAY
REEL
NON POST
UNMATED HIGH/ 5.05mm
MALE

DESCRIPTION: 0.80mm (0.031") Pitch Board To Board
Female connector H = 5.05mm(NO BOSS)

DEVICE TYPE: NP08-P



CUSTOMER :

DWG NO :

MATERIAL :PS 黑色

Q'TY : 1000PCS/REEL

ITEM	W	A0	B0	K0	K1	-	-	-	-	-	-	-
DIM	16 ^{+0.3 -0.3}	4.5 ^{+0.1 -0.1}	7.2 ^{+0.1 -0.1}	6.35 ^{+0.1 -0.1}	5.45 ^{+0.1 -0.1}	-	-	-	-	-	-	-

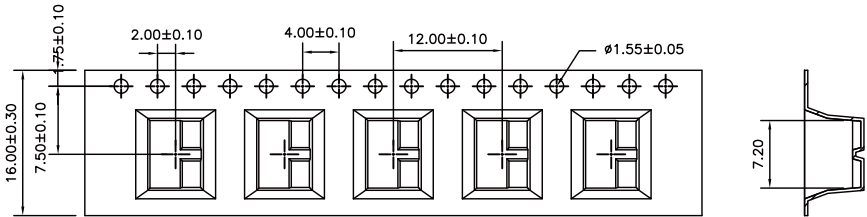

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE


SIZE A4

SCALE 1 : 1

PJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

NP08-P505XR-xxx-LF

SERIES

LEADFREE

REEL

NON POST

UNMATED HIGH/

5.05mm

MALE

010~100WAY

DESCRIPTION: 0.8mm Pitch Board-to-Board 2*5(10P) male Tape&Reel